(INCH POUND)
A-A-1923A
18 JULY 1995
SUPERSEDING
A-A-1923
2 May 1983


COMMERCIAL ITEM DESCRIPTION
SHIELD EXPANSION
(LAG, MACHINE AND EXTERNALLY THREADED WEDGE BOLT ANCHORS)

The General Services Administration has authorized the use of this commercial item description for all federal agencies

1 SCOPE This Commercial Item Description (CID) covers the following types of bolt anchors for use in attaching equipment and fixtures to masonry

Type 1 – Lag Bolt Anchors (Table I)
Type 2 – Machine Bolt Anchors, single – end expansion (Table II)
Type 3 – Machine Bolt Anchors, double – end expansion (Table II)
Type 4 – Externally Threaded Wedge Bolt Anchors (Table III)

2 SALIENT CHARACTERISTICS
2 1 Bolt Anchor Configurations

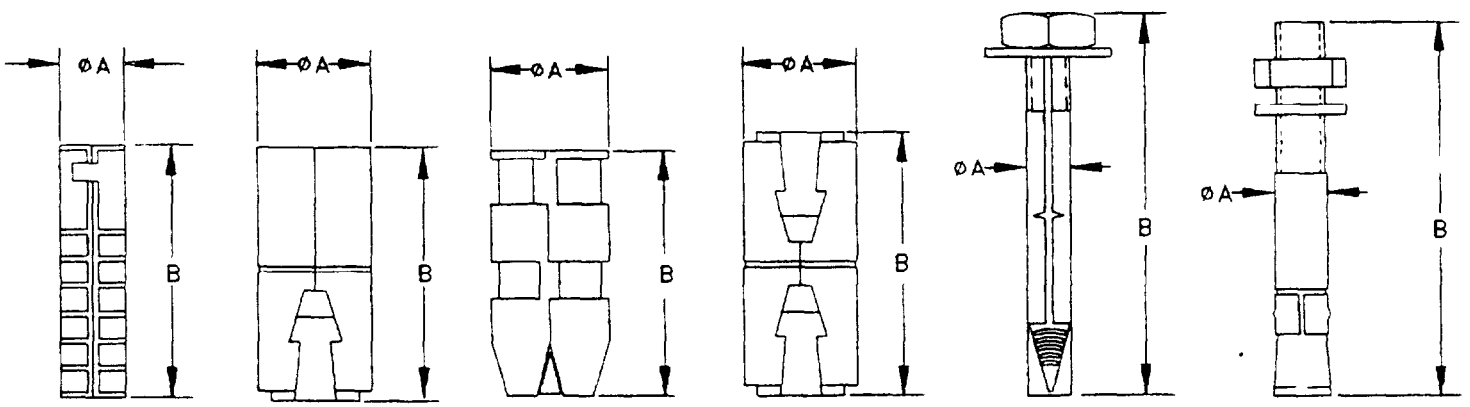

Type 1 Type 2 (design optional) Type 3 Type 4 (design optional)

Beneficial comments, recommendations, additions, deletions, clarifications, etc , and data which may improve this document should be sent to Defense Industrial Supply Center Attn DISC-ECB, 700 Robbins Avenue, Philadelphia, PA 19111 -5096

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

TABLE I Type 1, DASH NUMBERS AND DIMENSIONS

Dash Numbers	Size Diameter of Log Bolt	Anchor Dimensions		Average Ultimate [1,2] (Lbs) Capacity (Minimum)
		Outside Diameter A (Minimum)	Shield Length B (Minimum)	
Short Shields				
101	250	500	1 000	400
102	3125	500	1 000	800
103	375	625	1 750	1300
104	500	750	2 000	2100
105	625	875	2 000	2500
106	750	1 000	2 000	3000
Long Shields				
111	250	500	1 500	500
112	3125	500	1 750	1000
113	375	625	2 500	1600
114	500	750	3 000	2800
115	625	875	3 375	3500
116	750	1 000	3 500	4000

1 Recommended safe working load is one – fourth of the average ultimate capacity
2 Test in accordance with ASTM E488

TABLE II Type 2 and 3 DASH NUMBERS AND DIMENSIONS

Dash Numbers	Thread Size UNC-2B	Anchor Dimensions		Average Ultimate [1,2] (Lbs) Capacity (Minimum)
		Diameter A (Minimum)	Length B (Minimum)	
Type 2				
201	250-20	500	1 250	800
202	3125-18	500	1 375	1100
203	375-16	625	1 500	1450
204	500-13	750	2 000	1850
205	625-11	875	2 500	2400
206	750-10	1 000	2 750	3000
Type 3				
301	250-20	500	1 250	1100
302	3125-18	625	1 625	1450
303	375-16	625	2 000	1750
304	500-13	875	2 250	2200
305	625-11	1 000	2 750	3250
306	750-10	1 125	3 250	4600
307	875-9	1 500	4 000	5850
308	1 000-8	1 625	4 250	6700

1 Recommended safe working load is one – fourth of the average ultimate capacity
2 Test in accordance with ASTM E488

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

TABLE III Type 4 DASH NUMBERS AND DIMENSIONS

Dash Numbers	Thread Size UNC-2A	Anchor Dimensions		Recommended Minimum Imbedment	Average [1,2] Ultimate Capacity(Lbs) (Minimum)
		Diameter A (Minimum)	Length B (Minimum)		
401	250-20	250	1 750	1 125	1450
402	250-20	250	2 750	1 250	1500
403	250-20	250	3 000	1 250	1500
404	3125-18	3125	2 000	1 250	1900
405	3125-18	3125	3 000	1.250	1900
406	375-16	375	2 000	1.250	3200
407	375-16	375	2 750	1.500	3689
408	375-16	375	3 500	1 500	3689
409	500-13	500	2 750	2 000	4200
410	500-13	500	3 500	2 250	5065
411	500-13	500	5 00	2 250	5065
412	.500-13	500	6 00	2.250	5065
413	.625-11	625	6 00	3.500	10192
414	750-10	750	5 00	3 500	17194
415	750-10	750	6 00	3 500	17194
416	750-10	750	7 00	3 500	17194
417	875-9	.875	8 00	4 500	19000

1 Recommended safe working load is one - fourth of the average ultimate capacity
2 Test in accordance with ASTM E488

2 2 MATERIAL

2 2 1 Types 1,2 and 3 bolt achors shall be made of zinc alloy

2 2.2 Type 4 bolt anchors shall be made of steel and zinc plated in accordance with ASTM B633, Type III, SC1

2 2 3 Type 4 bolt anchor nuts shall be in accordance with ANSI/ASME B18 2 2

2 2 4 Type 4 bolt anchor washers shall be in accordance with ANSI/ASME B18 22 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

3 QUALITY CONFORMANCE PROVISIONS

3.1 The suppliers shall be responsible for those in process controls and inspections necessary to supply a product consistently conforming to the requirements of this document

3.2 Upon request, the supplier will certify with documented test/inspection evidence, that the parts supplied meet the requirements of this document

4 NOTES

4.1 Unless otherwise specified, all dimensions are in inches

4.2 Bolts are not included with Types 1, 2 and 3 bolt achors unless specified in purchasing contract

4.3 Packaging shall be in accordance with ASTM D3951

4.4 The part identification number (PIN) shall consist of the basic commercial item description number followed by a dash number from Table I, II, or III

Example AA1923-101

Dash Number

Basic Number

MILITARY INTERESTS

Custodians

Army - AR
Navy - YD
Air Force - 99

Preparing activity
DLA - IS

(Project No 5340-2225)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS


1 The preparing activity must complete blocks 1, 2 3 and 8 In block 1 both the document number and revision letter should be given
2 The submitter of this form must complete blocks 4 5 6 and 7
'he preparing activity must provide a reply within 30 days from receipt of the form
. E This form may not be used to request copies of documents, or to request waivers, or clarification of requirements on current contracts
Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER A-A-1923A	2 DOCUMENT DATE (YYMMDD) 950718

3 DOCUMENT TITLE **SHIELD, EXPANSION (LAG, MACHINE AND EXTERNALLY THREADED WEDGE BOLT ANCHORS)**

4 NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible Attach sheets if needed)

5 REASON FOR RECOMMENDATION

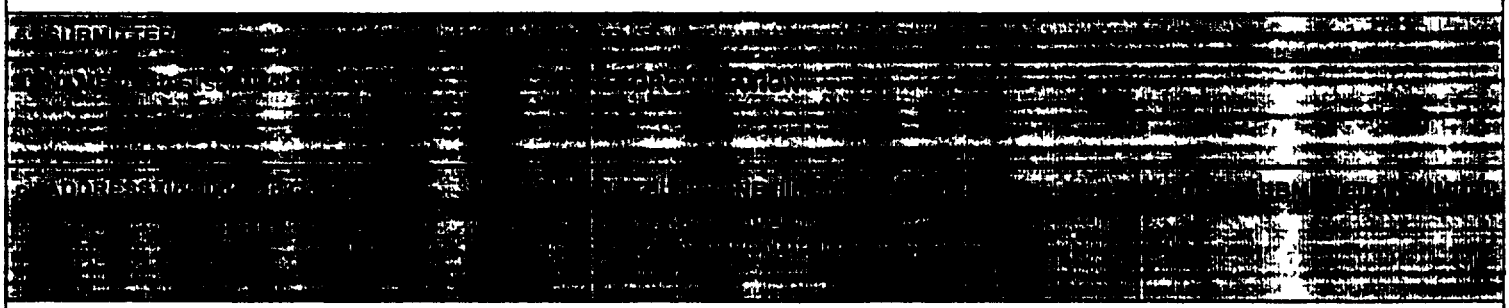

6 PREPARING ACTIVITY DLA-IS

a NAME Emelia Altomari	b TELEPHONE (Include Area Code) (1) Commercial (215) 697-6827
DDRESS (Include Zip Code) Defense Industrial Supply Center 700 Robbins Avenue Bldg 3 (Code DISC-EED) Philadelphia PA 19111 5096	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike Suite 1403 Falls Church, VA 22041 TELEPHONE (703) 756 2340 AUTOVON 289-2340

DD Form 1426 OCT 89 Previous editions are obsolete 198 90

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.