A-A-2314
September 27, 1985

COMMERCIAL ITEM DESCRIPTION


FILE, HAND (AMERICAN PATTERN), KNIFE

The General Services Administration has authorized the use of this commercial item description in preference to Type XI, Styles A, B, and C of Federal Specification GGG-F-325.

This commercial item description covers hand files used for filing acute angles such as in keyways and slots.

Salient characteristics:

Material:	Carbon alloy steel.
Width:	Tapered at least one-third of the length to the point.
Thickness:	Uniform or tapered slightly toward the point.
Design:	Shall have a knife cross-section with an included angle between sides of 9 to 15 degrees, inclusive. Each wide flat double-cut (two sets of parallel cuts on the surface, one set crossing the other). Thin flat single-cut (one set of parallel cuts on the surface). Back single-cut or smooth (safe). Furnished in either bastard-cut, second-cut, or smooth-cut as shown in table.
Tang:	Of a conventional shape and size suitable for attachment to a wood handle. Tempered to a maximum hardness of 45 on the Rockwell C scale at a point approximately midway of its length and width.
Teeth:	Uniformly cut or etched and of uniform height throughout the fully cut portion. Cutting surfaces hardened to a uniform hardness. The distance between the heel and point of the file, excluding the tang, shall be hardened to not greater than 68 nor less than 64 on the Rockwell C scale. Free from decarburization and brittleness.
Marking:	Marked with the country of origin and the name of the manufacturer or with a trademark of such known character that the source of manufacture may be readily determined.
Workmanship:	The teeth of the file shall be well-defined, sharp, and uniform in height and form. There shall be no evidence of rust or other defect which may impair serviceability, durability, or appearance.

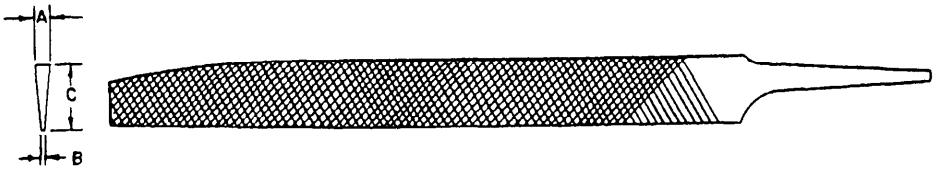

FSC 5110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:21Z
Check the source to verify that this is the current version before use.

National Stock Number	Length Inches	Dimensions at largest section A Inch	B Inch	C Inch	Number of teeth per inch Min.	Max.	Allowable distortion (maximum) Inch	Allowable warpage (maximum) Degrees
			Bastard-cut					
5110-00-234-6563	6	5/32	1/16	11/16	41	45	0.008	5
5110-00-234-6566	8	3/16	1/16	7/8	33	37	.010	6
5110-00-234-6569	10	1/4	1/16	1-1/16	28	32	.025	7
			Second-cut					
5110-00-238-7866	4	7/64	1/32	15/32	60	68	.006	3
5110-00-203-4948	6	5/32	1/16	11/16	52	59	.008	5
5110-00-234-6567	8	3/16	1/16	7/8	42	48	.010	6
5110-00-234-6570	10	1/4	1/16	1-1/16	34	39	.025	7
			Smooth-cut					
5110-00-203-4552	6	5/32	1/16	11/16	66	73	.008	5
5110-00-203-4553	8	3/16	1/16	7/8	54	60	.010	6
5110-00-203-4554	10	1/4	1/16	1-1/16	43	49	.025	7

Length dimension: Measured from the point (free or front end) to the heel (junction of the tang with the body of the file) and have a tolerance of plus or minus 1/8 inch.

Tolerance: Width (A) - plus or minus 1/16 inch.
Thickness (B) - files 4 and 6 inches in length - plus or minus 1/32 inch. Files over 6 inches in length - plus or minus 1/16 inch.

Regulatory requirements. In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:21Z
Check the source to verify that this is the current version before use.