A-A-2513
April 1, 1987

COMMERCIAL ITEM DESCRIPTION

BRUSHES, WIRE, ROTARY, END ATTACHMENT, SOLID WIRE FILLED

The General Services Administration has authorized the use of this commercial item description in preference to Type II, Class 1 of Federal Specification H-B-771.

This commercial item description covers brushes for use with pneumatic or electric tools in the removal of rust, scale, paint, or burrs from small or confined areas of all types of metal surfaces.

Salient characteristics:

Design: Solid filled end design for use with portable power tools and with drill presses. Wire securely attached to the wire-retaining components in a manner that permits the driving torque to be transmitted from the arbor to the brush periphery and that resists the functional forces produced by impact or centrifugal force. With round shank for mounting in chucks or collets.

Wire material: High carbon tempered steel, corrosion-resisting steel, or brass, as specified in the table.

Wire form: Crimped (with at least four single amplitude, three dimensional crimps to the inch).

Marking: Marked with the Maximum Safe Free Speed (or optionally, MSFS or Maximum RPM), the country of origin, the words "Wear Eye Protection", and the name of the manufacturer or a trademark of such known character that the source of manufacture may be readily determined. Marked speed may be higher than speed listed in table.

Workmanship: The brushes shall be well-constructed with a balanced distribution of wire fill. There shall be no evidence of rust, loose wire, or other defect which may impair serviceability, durability, or appearance.


Standards compliance: The brushes shall comply with American National Standards Institute (ANSI) Standard B165.1, Safety Requirements for the Design, Care and Use of Power Driven Brushing Tools.

National Stock Number	Outside Brush Diameter (Inches)	Wire Diameter (Inch)	Shank Diameter (Inch)	Wire Trim Length (min.) (Inches)	Wire Trim Length (max.) (Inches)	Material	Max. Safe Free Speed (rpm)
5130-00-960-9743	3/16	0.0060	1/4	1-1/2	1-5/8	CRS	8000
5130-00-293-2407	1/4	0.0060	1/8	3/8	1/2	HTS	8000
5130-00-455-9053	5/16	0.0060	1/4	9/16	5/8	CRS	8000
5130-00-435-2310	1/2	0.0060	1/4	1/4	1	CRS	8000
5130-01-027-0494	1/2	0.0060	1/4	3/4	1-1/8	BRS	15000
5130-00-456-5482	1/2	0.0140	1/4	3/4	1-1/8	CRS	8000
5130-01-015-3971	1/2	0.0204	1/4	3/4	1-1/8	HTS	15000
5130-00-435-2309	3/4	0.0060	1/4	3/4	1-1/8	HTS	8000
5130-00-293-2410	3/4	0.0204	1/4	3/4	1-1/8	HTS	8000
5130-00-435-2053	1	0.0060	1/4	3/4	1-1/8	CRS	8000
5130-00-900-3584	1	0.0060	1/4	3/4	7/8	BRS	8000
5130-01-027-0493	1	0.0060	1/4	3/4	1-1/8	BRS	15000
5130-00-539-7762	1	0.0060	1/4	3/4	1-1/8	HTS	15000
5130-00-199-6648	1	0.0104	1/4	3/4	1-1/8	CRS	8000
5130-00-456-5483	1	0.0140	1/4	3/4	1-1/8	HTS	8000
5130-00-263-0235	1	0.0204	1/4	3/4	1-1/8	HTS	8000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

CRS - corrosion-resisting steel
HTS - high carbon tempered steel
BRS - brass

Tolerance: Outside diameter - plus or minus 1/8 inch.
Wire diameter - plus or minus 0.001 inch.
Shank diameter - plus 0.000 inch, minus 0.005 inch.

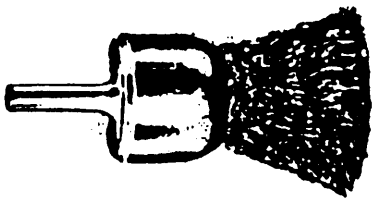

Free speed test. The brush shall be attached to a power source and rotated at a speed 20 percent faster than the maximum free speed indicated in the table. The brush shall be shrouded in an enclosure capable of capturing all fill wire or other debris that may become separated from the brush during the test. The brush shall be rotated at the maximum free speed indicated in the table for one minute. The interior of the enclosure shall then be examined for any wire or other foreign matter ejected from the brush. Any evidence of fill wire separation, other than trimmings, shall be cause for rejection of the lot.

Quality assurance provisions.

Inspection. Sampling for inspection shall be in accordance with MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes, except where otherwise indicated herein. The lot size shall consist of all brushes of the same style and size offered for acceptance at one time. The sample unit is one brush.

Examination for visual requirements. Each brush shall be examined for workmanship and marking requirements. The inspection level shall be Inspection Level II with an acceptable quality level (AQL) of 2.5 defects per hundred units.

Examination for dimensional requirements. Each brush shall be examined for dimensional requirements. The inspection level shall be Inspection Level I with an AQL of 2.5 defects per hundred units.

Testing for free speed test requirements. Each brush shall be examined for conformance to the requirements of the free speed test. The inspection level shall be Special Inspection Level S-3 with an AQL of 2.5 defects per hundred units.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

NOTES:

The issue of the referenced documents in effect on the date of the solicitation shall be used to determine compliance with the stated requirements.

ANSI Standards are available from American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.

Military Standards are available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.