INCH-POUND

MIL-F-70807 (AR)
AMENDMENT 1
17 October 1988

MILITARY SPECIFICATION

FUZE, PD: M745
(LESS BOOSTER AND LEAD)

This amendment forms a part of Military Specification MIL-F-70807 (AR), dated 11 March 1988, and is approved for use within the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1.2, DRAWINGS, Add "9347415 - Packing & Marking of Box Fiberboard for Fuze, Multi-Option, M734 and Fuze, PD, M745" and "9381685 - Packing & Marking of Container, M548 for Fuze, Multi-Option, M734 and Fuze, PD, M745."

PAGE 3

3.1.1: Change "397" to read "458," and change "237" to read "428"

PAGE 4

3.1.4: Delete in its entirety and substitute the following:

"3.1.4 Ballistic sample.

3.1.4.1 Initial production lot. Select at random ballistic lot acceptance samples from first production lot. Ballistic lot acceptance test plan is shown in figure 2.

3.1.4.2 Production lot. Select at random ballistic lot acceptance samples from each production lot. Ballistic lot acceptance test plan is shown in figure 3."

3.2: Change "(Figure 3)" to read "(Figure 4)."

PAGE 5

3.3: Change "-25°F" to read "-50°F"

AMSC N/A FSC 1390

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:05Z
Check the source to verify that this is the current version before use.

PAGE 7

3.3.2.4: Line 4, Change "low" to read "low (-50°F)"

PAGE 10

4.4.3.1: Change "Figure 2" to read Figure 2 and 3."

4.4.3.2: Change "Figure 2" to read "Figure 2 and 3."

4.4.3.2: Delete the last sentence of the paragraph.

PAGE 13

4.5.1.1.2.1: Delete the words "high explosive of the."

PAGE 15

4.5.1.2.1.5: Change "Test 101.3, Procedure I" to read "Test 101.2, Procedure II."

4.5.1.2.1.6: Change "Test 102.2" to read "Test 102.1."

4.5.1.2.1.7: Change "Test 103.2" to read "Test 103.1."

PAGE 17

6.2.2: Delete last sentence of paragraph.

PAGE 27

4.4.2.4: Major 102, Change ".040" to read ".042"

PAGE 34

4.4.2.11: Minor 201, Change ".264" to read "268."

PAGE 36

4.4.2.13: Note A, Add "Special inspection level S-4 shall be applied for selecting sample size.

PAGE 46

4.4.2.22: Delete paragraph in its entirety and substitute new paragraph included.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:05Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.22	Cam	1 OF 1	11744137
			NEXT HIGHER ASSEMBLY 11737016

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Insufficient strength of arm		0.40%	3.1	Force test (Dwg. Note 5)
102	.203 arm height or perpendicularity out-of-tolerance		0.40%	3.1	Gage
103	.140 arm length out-of-tolerance		0.40%	3.1	Gage
Minor					
201	.125 diameter out-of-tolerance		0.65%	3.1	Gage
202	.500 length out-of-tolerance		0.65%	3.1	Gage
203	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:05Z
Check the source to verify that this is the current version before use.

PAGE 55

4.4.2.31: Delete Major 101 in its entirety and substitute "None defined."

PAGE 64

Delete in its entirety and substitute as per included sheet.

PAGE 65

Delete in its entirety and substitute as per included sheet.

PAGE 66

Delete in its entirety and substitute as per included sheet.


PAGE 67

Figure 4: Add new figure as per included sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:05Z
Check the source to verify that this is the current version before use.

FIGURE 1

FIRST ARTICLE INSPECTION FLOW CHART

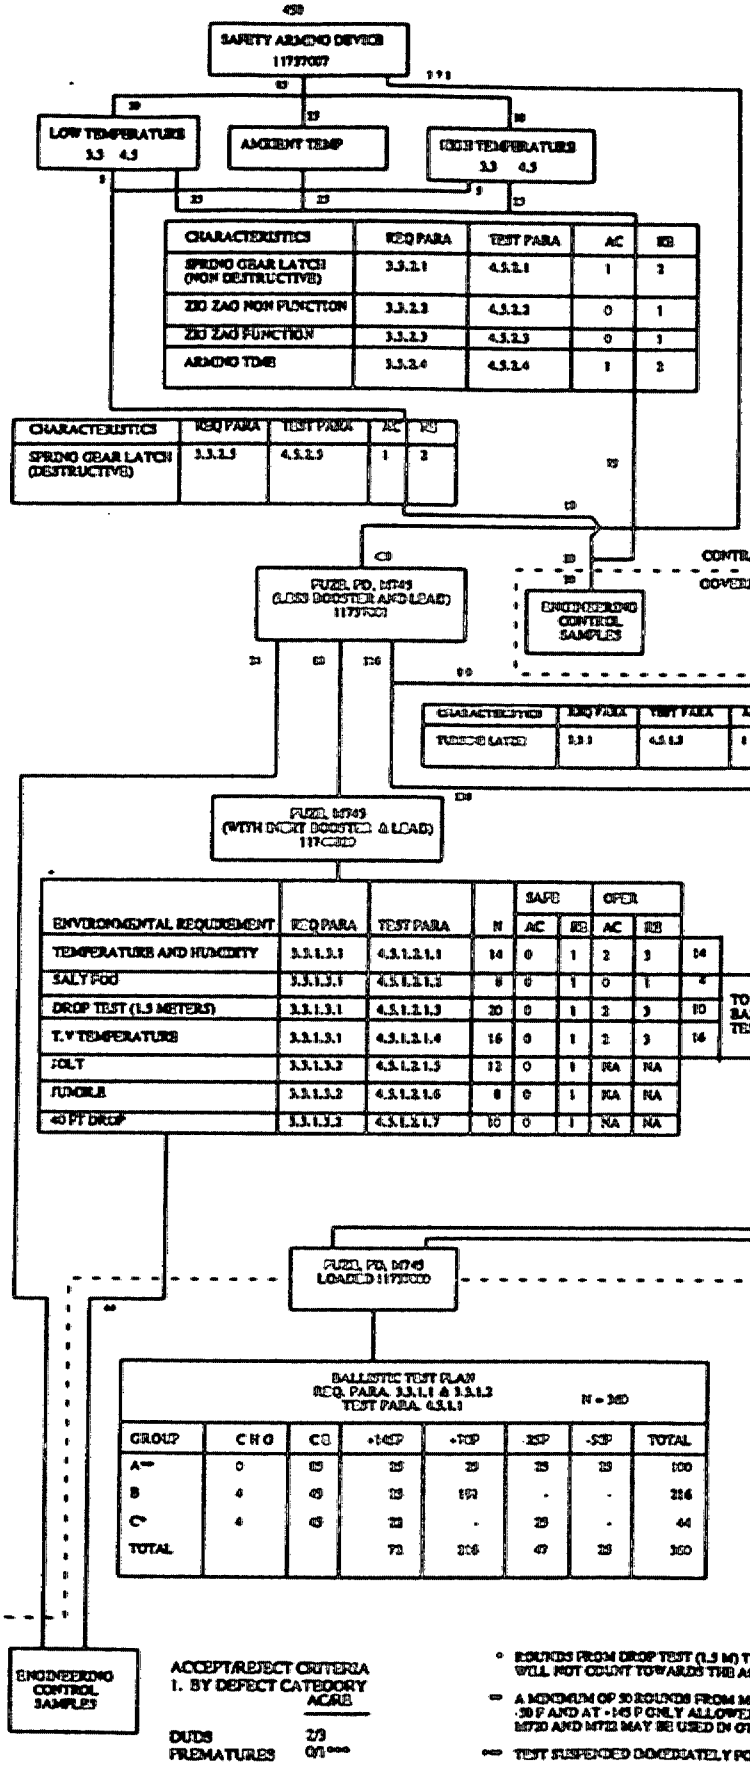

CHARACTERISTICS	REQ PARA	TEST PARA	AC	RE
SPRING GEAR LATCH (NON DESTRUCTIVE)	3.3.2.1	4.5.2.1	1	2
ZIG ZAG NON FUNCTION	3.3.2.2	4.5.2.2	0	1
ZIG ZAG FUNCTION	3.3.2.3	4.5.2.3	0	1
ARMING TIME	3.3.2.4	4.5.2.4	1	2

CHARACTERISTICS	REQ PARA	TEST PARA	AC	RE
SPRING GEAR LATCH (DESTRUCTIVE)	3.3.2.5	4.5.2.5	1	2

CHARACTERISTICS	REQ PARA	TEST PARA	AC	RE
FUZING GEAR LATCH	3.3.1	4.5.1.3	1	2

ENVIRONMENTAL REQUIREMENT	REQ PARA	TEST PARA	N	SAFE AC	SAFE RE	OPER AC	OPER RE	
TEMPERATURE AND HUMIDITY	3.3.1.3.1	4.5.1.2.1.1	14	0	1	2	3	14
SALT FOG	3.3.1.3.1	4.5.1.2.1.2	8	0	1	0	1	4
DROP TEST (1.5 METERS)	3.3.1.3.1	4.5.1.2.1.3	20	0	1	2	3	10
T.V TEMPERATURE	3.3.1.3.1	4.5.1.2.1.4	16	0	1	2	3	16
SOLT	3.3.1.3.2	4.5.1.2.1.5	12	0	1	NA	NA	
FUNGUS	3.3.1.3.2	4.5.1.2.1.6	8	0	1	NA	NA	
40 FT DROP	3.3.1.3.3	4.5.1.2.1.7	10	0	1	NA	NA	

TO GROUP C BALLISTICS TEST PLAN

BALLISTIC TEST PLAN
REQ. PARA. 3.3.1.1 & 3.3.1.2
TEST PARA. 4.5.1.1
N = 360

GROUP	C H O	CO	+1452	+70F	-25F	-54F	TOTAL
A**	0	80	25	25	25	25	100
B	4	40	25	151	-	-	216
C*	4	40	22	-	25	-	44
TOTAL			72	216	47	25	360

ACCEPT/REJECT CRITERIA
1. BY DEFECT CATEGORY

	ACRE
DUDS	2/3
PREMATURES	0/1***

* ROUNDS FROM DROP TEST (1.5 M) THAT FAIL TO FUNCTION WILL NOT COUNT TOWARDS THIS ACCEPT/REJECT DUD CRITERIA.


** A MINIMUM OF 30 ROUNDS FROM M722 CARTRIDGE CONDITIONED AT -30 F AND AT +145 F ONLY ALLOWED FOR TEST IN GROUP A. M720 AND M721 MAY BE USED IN OTHER AREAS.

*** TEST SUSPENDED IMMEDIATELY FOR FAILURE ANALYSIS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:05Z
Check the source to verify that this is the current version before use.

FIGURE 2

INITIAL LOT PERFORMANCE INSPECTION FLOW CHART

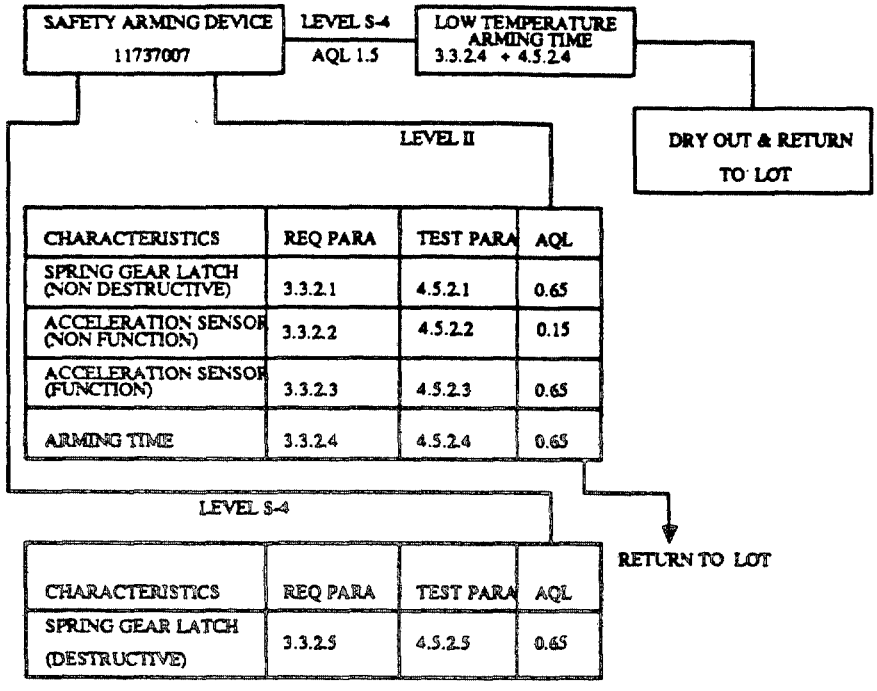

FUZE, PD: M745
LOADED 11737000

BALLISTIC TEST PLAN
REQ PARA 3.3.1.1 & 3.3.1.2
TEST PARA 4.5.1.1
N = 280

GROUP	CHG	CE	+145F	+70F	-25F	-50F	TOTAL	CARTRIDGE
** A	0	85	25	25	25	25	100	M722 OR M720
B	4	45	25	111	-	-	136	
C	4	45	22	-	22	-	44	M722 OR M720
TOTAL	-	-	72	136	47	25	280	

** A MINIMUM OF FIFTY ROUNDS FROM M722 CARTRIDGE CONDITIONED AT -50F AND +145F ARE ONLY ALLOWED FOR TEST IN GROUP A. M720 AND M722 MAY BE USED IN OTHER AREAS

FUZE, PD: M745
LESS BOOSTER & LEAD 11737001

LEVEL II

CHARACTERISTICS	REQ PARA	TEST PARA	AQL
TURBINE LATCH	3.3.1	4.5.1.3	0.65

RETURN TO LOT


OVERALL CRITERIA	N	AC/RC	APPLICABLE PARA
DUDS	280	2/3	4.5.1.1.2.1
PREMATURES	280	0/1*	4.5.1.1.2.2


* TESTS SUSPENDED IMMEDIATELY FOR FAILURE ANALYSIS


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:05Z
Check the source to verify that this is the current version before use.

FIGURE 3

LOT PERFORMANCE INSPECTION FLOW CHART

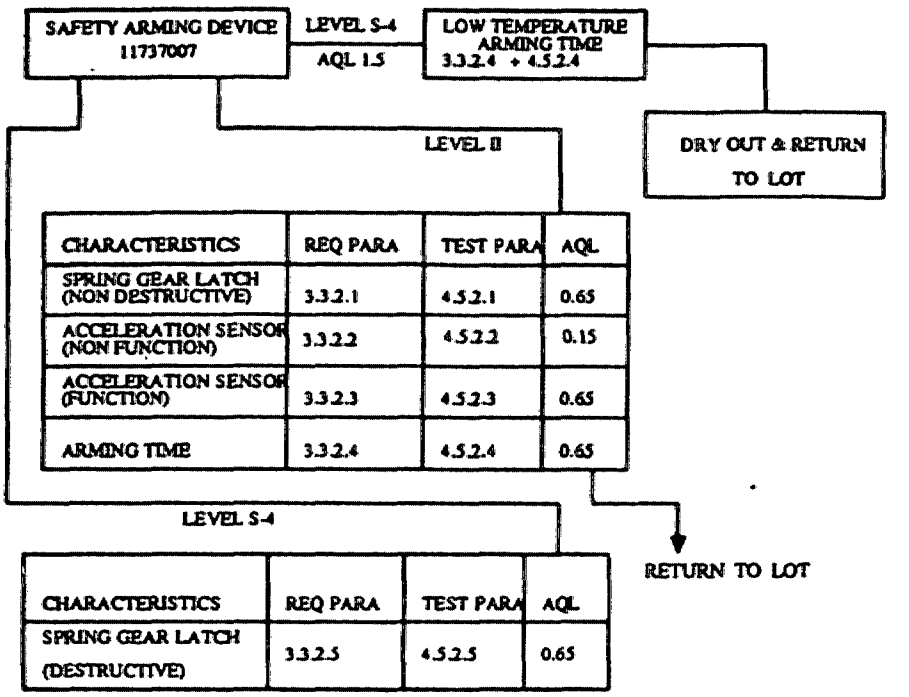

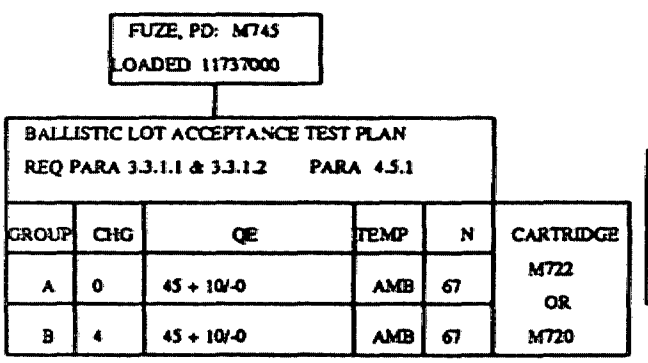


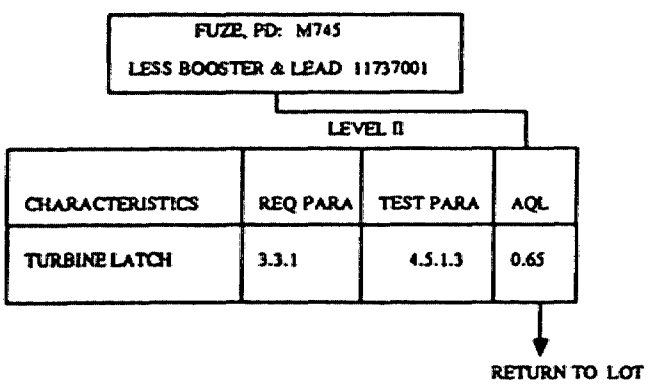

OVERALL CRITERIA	N	AC/RC	APPLICABLE PARA
DUDS	134	2/3	4.5.1.1.2.1
PREMATURES	134	0/1*	4.5.1.1.2.2

* TESTS SUSPENDED IMMEDIATELY FOR FAILURE ANALYSIS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:05Z
Check the source to verify that this is the current version before use.

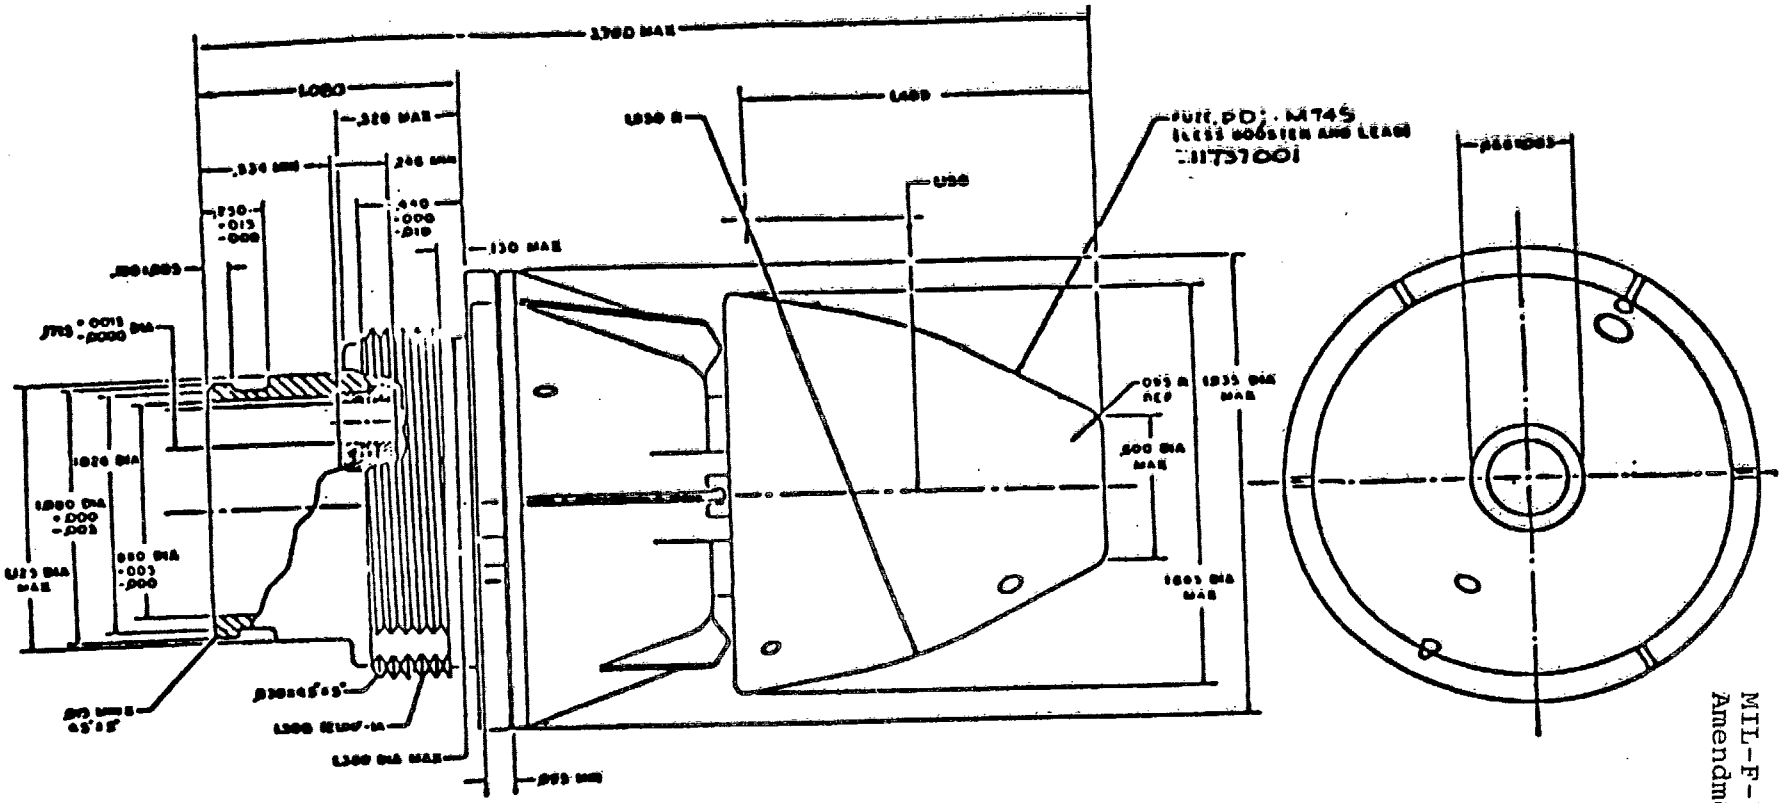

NOTES:

1. WEIGHT OF FULLY LOADED FUZE IS .50 + .00/-.10 LBS
2. .1715 DIA HOLE SHALL BE ADJACENT TO SCALLOP IN BOOSTER CAVITY SUCH THAT LEAD CAN BE INSERTED
3. S & A ROTOR SHALL BE IN SAFE POSITION (DWGS 11737010 AND 11737007). M61 DETONATOR (8865554) IN PRIMER HOUSING ASSY (11737005) SHALL NOT BE VISIBLE THROUGH BARRIER LEAD HOLE IN AFT END OF FUZE.
4. FUZE SHALL BE PERMANENTLY MARKED PER DWGS 11740819
5. FUZE SHOWN IS NOT FULLY LOADED. SEE DWG NO 11737000 FOR LOADED ASSEMBLY AND COMPLETE INTERFACE DIMENSIONS

FIGURE 4 INTERFACE CONTROL DRAWING

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:52
Check the source to verify that this is the current version before use.

Custodian:
Army-AR

Preparing Activity
Army-AR

(Project 1390-A613)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:05Z
Check the source to verify that this is the current version before use.