MILITARY SPECIFICATION SHEET

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP-FREE, THREE POLE, AUXILIARY CONTACTS (0.2 to 50 AMPERES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the circuit breakers described herein shall consist of this specification and the latest issue of MIL-C-55629.

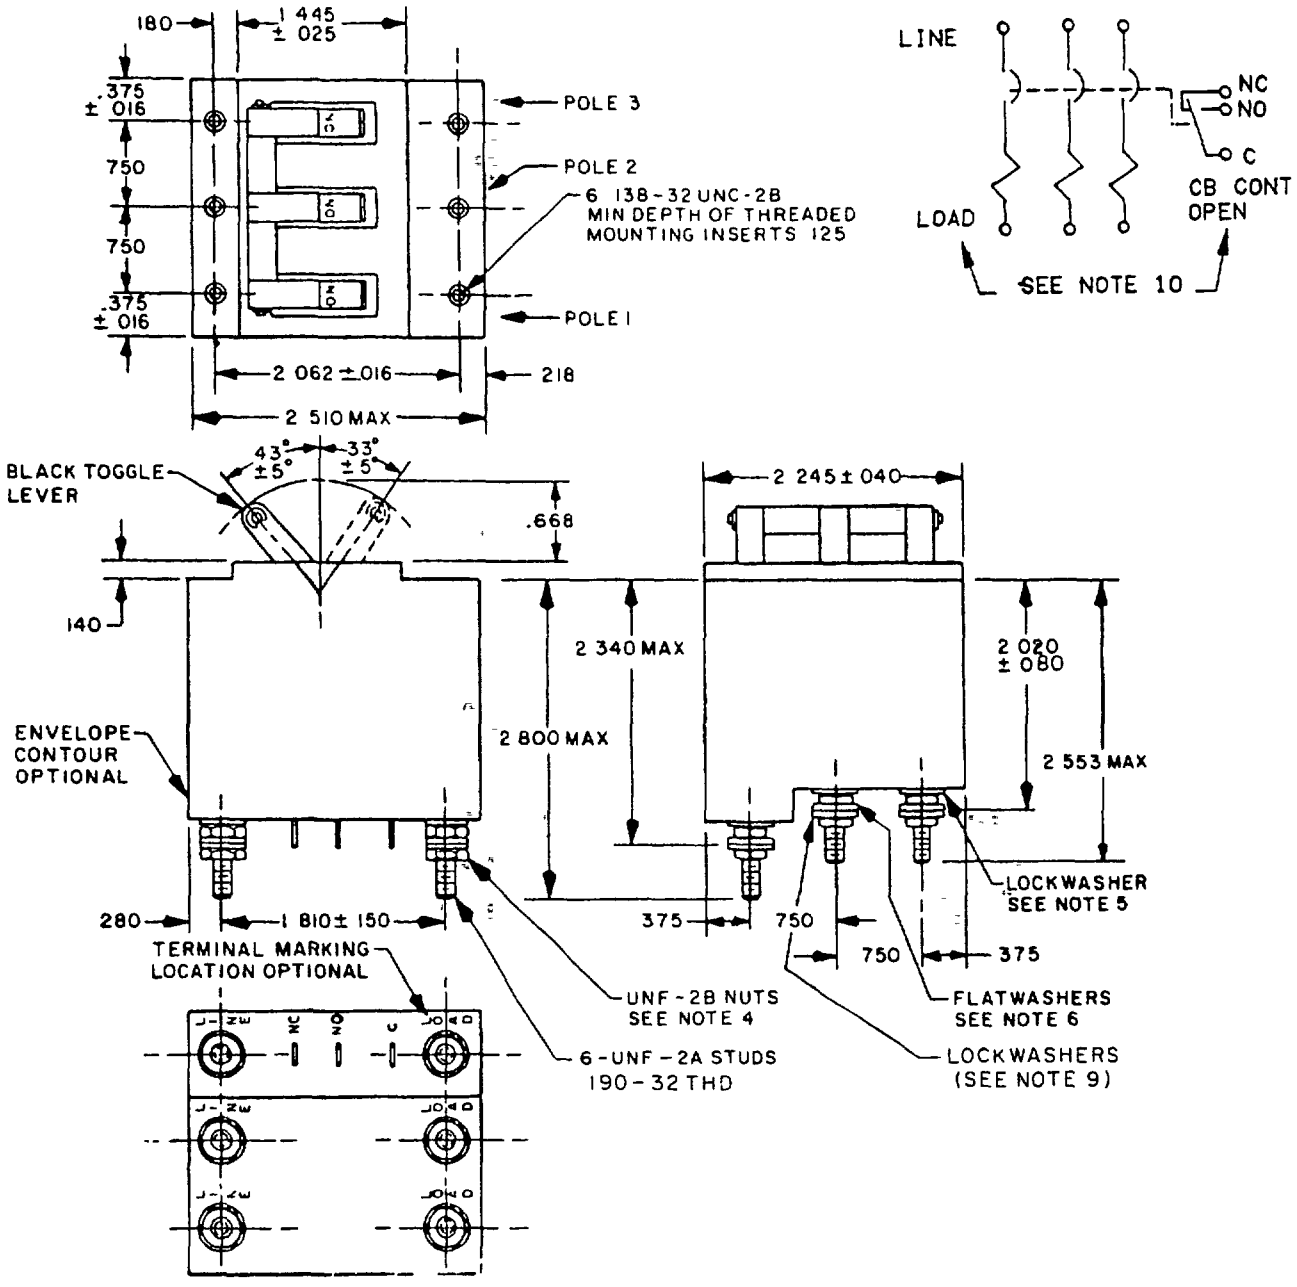


FIGURE 1 Dimensions and configurations

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-22123:45Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.138	3.50	.303	/ 70	2.020	51 31
.010	0.25	140	3.56	313	7 95	2.060	52.32
.016	0 41	.150	3.81	368	9 35	2 062	52 37
.025	0 64	156	3 96	375	9 52	2.245	57 02
.031	0 79	.180	4 58	378	9 60	2 340	59 44
032	0.81	190	4.83	438	11 13	2.420	61 47
.035	0.89	.204	5 18	500	12 70	2 510	63.75
.040	1 02	.218	5.54	.668	16 97	2 553	64.85
.080	2 03	.250	6 35	.750	19 05	2.800	71 12
.109	2 77	.280	7.11	1 445	36 70	3 125	79.38
.125	3 18	281	7 14	1.810	45 97		

NOTES.
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 031
4. NUT-HEX .190 - 32 UNF-2B, .313/.303 across flats, .109 ± 010 thick
   Material - Brass (QQ-B-626), Tin Plated (MIL-T-10727 type I) or Stainless Steel, for each terminal
5. Captive washer nut assembly of brass nut, bronze washer, tin plated, or lockwasher, internal or external tooth, MS35333-107 or MS35335-88 or equivalent
6. Washer, Flat .378/ 368 OD, 204/ 190 ID, 032 ± 005 thick
   Material - Brass (QQ-B-626) Tin Plated (MIL-T-10727 type I) or Phosphor Bronze, composition (QQ-B-750)
7. Auxiliary contact terminals shall provide for soldered connections and shall be located on the back side of the circuit breaker (same surface as main terminals) otherwise location, style and design are optional
8. When panel sealing is required, boots shall be in accordance with MIL-B-5423/14-07
9. Lockwasher, Split MS35338-138 or equivalent
10. Physical item marking of the words "LOAD" and "CB CONT OPEN" is optional.

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration. See figure 1.

Current ratings: See table I.

Voltage ratings: See tables II through V. 240 V ac breakers are designed also for use at 120 V ac.

Tripping-time delays See tables II through V.

High inrush: Applicable to time delays K, L, M, N, P, R, and S.

Terminal and mounting hardware. See figure 1.

Terminals. See figure 1.

Auxiliary contact terminals:
Contact capacity shall be 10 amperes to 250 volts 60/400 Hz and 2 amperes resistive, 1 ampere inductive to 50 V dc.

Actuator strength 25 pounds.

Actuator operating force 12 pounds, maximum.

Terminal strength

Applied load: 30 pounds.
Applied torque. 32 pound-inches.

Vibration Energized current shall be 90 percent for characteristics H, I, and J.


Shock: Energized current shall be 90 percent for characteristics H, I, and J.

Interrupting capacities:

2,000 amperes at 50 V dc.
2,000 amperes at 120 V ac, 60 Hz.
1,500 amperes at 120 V ac, 400 Hz.
1,000 amperes at 240 V ac, 60 Hz and 400 Hz.

Part number. M55629/6- (dash number from table I for circuit breakers with all poles of identical current rating and time delay) or M55629/6- (six letter code from table I for circuit breakers with poles of mixed current ratings or time delay), or both.

For pole identification, see figure 1

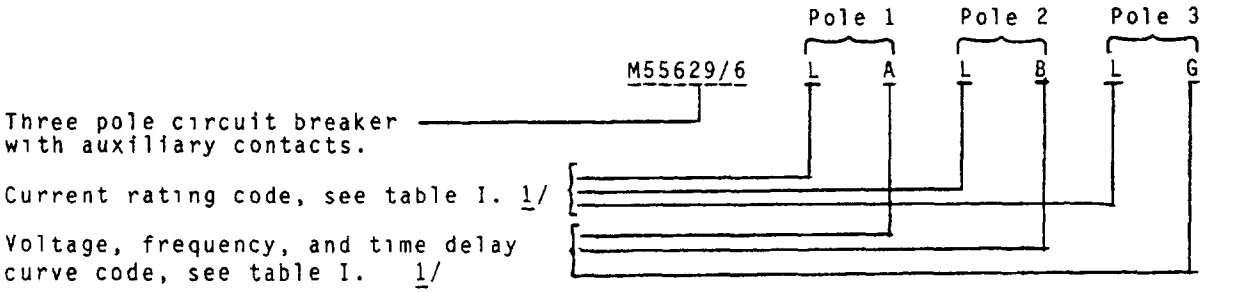

1/ For mixed poles, poles 1, 2, and 3, respectively shall be coded in ascending order of current rating code letter. If two or more poles have identical current ratings, those poles shall be coded in ascending order of voltage, frequency, and time delay code letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics.

Dash no.	Current rating (amperes)	Current rating Code letter	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)	Dash no.	Current rating (amperes)	Current rating Code letter	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)
001	0.2	A	A	32	158	0.75	D	G	7
002	"	"	B	32	152	"	"	H	3
003	"	"	C	34	155	"	"	I	3
004	"	"	D	34	159	"	"	J	7
005	"	"	E	72	272	"	"	K	3
006	"	"	F	72	273	"	"	L	3
007	"	"	G	72	274	"	"	M	3
134	"	"	H	32	275	"	"	N	3
135	"	"	I	34	276	"	"	P	7
136	"	"	J	72	277	"	"	R	7
251	"	"	K	32	278	"	"	S	7
252	"	"	L	32	429	"	"	T	3
253	"	"	M	34	015	1.0	E	A	2
254	"	"	N	34	016	"	"	B	2
255	"	"	P	72	017	"	"	C	2
256	"	"	R	72	018	"	"	D	2
257	"	"	S	72	019	"	"	E	4
426	"	"	T	34	020	"	"	F	4
137	0.25	B	A	21	021	"	"	G	4
138	"	"	B	21	160	"	"	H	2
140	"	"	C	23	161	"	"	I	2
141	"	"	D	23	162	"	"	J	4
143	"	"	E	43	279	"	"	K	2
144	"	"	F	43	280	"	"	L	2
145	"	"	G	43	281	"	"	M	2
139	"	"	H	21	282	"	"	N	2
142	"	"	I	23	283	"	"	P	4
146	"	"	J	43	284	"	"	R	4
258	"	"	K	21	285	"	"	S	4
259	"	"	L	21	430	"	"	T	2
260	"	"	M	23	163	1.5	F	A	.9
261	"	"	N	23	164	"	"	B	.9
262	"	"	P	43	166	"	"	C	.9
263	"	"	R	43	167	"	"	D	.9
264	"	"	S	43	169	"	"	E	2
427	"	"	T	23	170	"	"	F	2
008	0.5	C	A	6	171	"	"	G	2
009	"	"	B	6	165	"	"	H	.9
010	"	"	C	6	168	"	"	I	.9
011	"	"	D	6	172	"	"	J	2
012	"	"	E	12	286	"	"	K	.9
013	"	"	F	12	287	"	"	L	.9
014	"	"	G	12	288	"	"	M	.9
147	"	"	H	6	289	"	"	N	.9
148	"	"	I	6	290	"	"	P	2
149	"	"	J	12	291	"	"	R	2
265	"	"	K	6	292	"	"	S	2
266	"	"	L	6	431	"	"	T	.9
267	"	"	M	6	022	2.0	G	A	.5
268	"	"	N	6	023	"	"	B	.5
269	"	"	P	12	024	"	"	C	.5
270	"	"	R	12	025	"	"	D	.5
271	"	"	S	12	026	"	"	E	.8
428	"	"	T	6	027	"	"	F	.8
150	0.75	D	A	3	028	"	"	G	.8
151	"	"	B	3	173	"	"	H	.5
153	"	"	C	3	174	"	"	I	.5
154	"	"	D	3	175	"	"	J	.8
156	"	"	E	7	293	"	"	K	.5
157	"	"	F	7	294	"	"	L	.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.

Dash no.	Current rating (amperes)	Current rating Code letter	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)	Dash no	Current rating (amperes)	Current rating Code letter	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)
295	2.0	G	M	.5	036	4.0	K	A	.1
296	"	"	N	.5	037	"	"	B	.1
297	"	"	P	.8	038	"	"	C	.1
298	"	"	R	.8	039	"	"	D	.1
299	"	"	S	.8	040	"	"	E	.3
432	"	"	T	.5	041	"	"	F	.3
176	2.5	H	A	.35	042	"	"	G	.3
177	"	"	B	.35	199	"	"	H	.1
179	"	"	C	.35	200	"	"	I	.1
180	"	"	D	.35	201	"	"	J	.3
182	"	"	E	.6	321	"	"	K	.1
183	"	"	F	.6	322	"	"	L	.1
184	"	"	G	.6	323	"	"	M	.1
178	"	"	H	.35	324	"	"	N	.1
181	"	"	I	.35	325	"	"	P	.3
185	"	"	J	.6	326	"	"	R	.3
300	"	"	K	.35	327	"	"	S	.3
301	"	"	L	.35	436	"	"	T	.1
302	"	"	M	.35	043	5.0	L	A	.08
303	"	"	N	.35	044	"	"	B	.08
304	"	"	P	.6	045	"	"	C	.08
305	"	"	R	.6	046	"	"	D	.08
306	"	"	S	.6	047	"	"	E	.15
433	"	"	T	.35	048	"	"	F	.15
029	3.0	I	A	.3	049	"	"	G	.15
030	"	"	B	.3	202	"	"	H	.08
031	"	"	C	.3	203	"	"	I	.08
032	"	"	D	.3	204	"	"	J	.15
033	"	"	E	.5	328	"	"	K	.08
034	"	"	F	.5	329	"	"	L	.08
035	"	"	G	.5	330	"	"	M	.08
186	"	"	H	.3	331	"	"	N	.08
187	"	"	I	.3	332	"	"	P	.15
188	"	"	J	.5	333	"	"	R	.15
307	"	"	K	.3	334	"	"	S	.15
308	"	"	L	.3	437	"	"	T	.08
309	"	"	M	.3	050	6.0	M	A	.06
310	"	"	N	3	051	"	"	B	.06
311	"	"	P	.5	052	"	"	C	.06
312	"	"	R	.5	053	"	"	D	.06
313	"	"	S	.5	054	"	"	E	.08
434	"	"	T	.3	055	"	"	F	.08
189	3.5	J	A	.15	056	"	"	G	.08
190	"	"	B	.15	205	"	"	H	.06
192	"	"	C	.15	206	"	"	I	.06
193	"	"	D	.15	207	"	"	J	.08
195	"	"	E	.35	335	"	"	K	.06
196	"	"	F	.35	336	"	"	L	.06
197	"	"	G	.35	337	"	"	M	.06
191	"	"	H	.15	338	"	"	N	.06
194	"	"	I	.15	339	"	"	P	.08
198	"	"	J	.35	340	"	"	R	.08
314	"	"	K	.15	341	"	"	S	.08
315	"	"	L	.15	438	"	"	T	.06
316	"	"	M	.15	057	7.0	N	A	.04
317	"	"	N	.15	058	"	"	B	.04
318	"	"	P	.35	059	"	"	C	.04
319	"	"	R	.35	060	"	"	D	.04
320	"	"	S	.35	061	"	"	E	.07
435	"	"	T	.15					

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.

Dash no.	Current rating (amperes)	Current rating Code letter	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)	Dash no.	Current rating (amperes)	Current rating Code letter	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)
062	7.0	N	F	.07	363	10.0	R	K	.02
063	"	"	G	.07	364	"	"	L	.02
208	"	"	H	.04	365	"	"	M	.02
209	"	"	I	.04	366	"	"	N	.02
210	"	"	J	.07	367	"	"	P	.04
342	"	"	K	.04	368	"	"	R	.04
343	"	"	L	.04	369	"	"	S	.04
344	"	"	M	.04	442	"	"	T	.02
345	"	"	N	.04	085	12.5	S	A	.013
346	"	"	P	.07	086	"	"	B	.013
347	"	"	R	.07	087	"	"	C	.015
348	"	"	S	.07	088	"	"	D	.015
439	"	"	T	.04	089	"	"	E	.03
064	8.0	P	A	.03	090	"	"	F	.03
065	"	"	B	.03	091	"	"	G	.03
066	"	"	C	.03	220	"	"	H	.013
067	"	"	D	.03	221	"	"	I	.013
068	"	"	E	.06	222	"	"	J	.03
069	"	"	F	.06	370	"	"	K	.013
070	"	"	G	.06	371	"	"	L	.013
211	"	"	H	.03	372	"	"	M	.015
212	"	"	I	.03	373	"	"	N	.015
213	"	"	J	.06	374	"	"	P	.03
349	"	"	K	.03	375	"	"	R	.03
350	"	"	L	.03	376	"	"	S	.03
351	"	"	M	.03	443	"	"	T	.015
352	"	"	N	.03	092	15.0	T	A	.01
353	"	"	P	.06	093	"	"	B	.01
354	"	"	R	.06	094	"	"	C	.011
355	"	"	S	.06	095	"	"	D	.011
440	"	"	T	.03	096	"	"	E	.02
071	9.0	Q	A	.018	097	"	"	F	.02
072	"	"	B	.018	098	"	"	G	.02
073	"	"	C	.02	223	"	"	H	.013
074	"	"	D	.02	224	"	"	I	.015
075	"	"	E	.05	225	"	"	J	.03
076	"	"	F	.05	377	"	"	K	.01
077	"	"	G	.05	378	"	"	L	.01
214	"	"	H	.02	379	"	"	M	.011
215	"	"	I	.02	380	"	"	N	.011
216	"	"	J	.05	381	"	"	P	.02
356	"	"	K	.018	382	"	"	R	.02
357	"	"	L	.018	383	"	"	S	.02
358	"	"	M	.02	444	"	"	T	.011
359	"	"	N	.02	099	20.0	U	A	.007
360	"	"	P	.05	100	"	"	B	.007
361	"	"	R	.05	101	"	"	C	.007
362	"	"	S	.05	102	"	"	D	.007
441	"	"	T	.02	103	"	"	E	.01
078	10.0	R	A	.02	104	"	"	F	.01
079	"	"	B	.02	105	"	"	G	.01
080	"	"	C	.02	226	"	"	H	.007
081	"	"	D	.02	227	"	"	I	.007
082	"	"	E	.04	228	"	"	J	.01
083	"	"	F	.04	384	"	"	K	.007
084	"	"	G	.04	385	"	"	L	.007
217	"	"	H	.02	386	"	"	M	.007
218	"	"	I	.02	387	"	"	N	.007
219	"	"	J	.04	388	"	"	P	.01
					389	"	"	R	.01

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.

Dash no.	Current rating (amperes)	Current rating Code letter	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)	Dash no.	Current rating (amperes)	Current rating Code letter	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)
390	20.0	U	S	.01	236	35.0	X	I	.004
445	20.0	U	T	.007	237	"	"	J	.005
106	25.0	V	A	.006	405	"	"	K	.004
107	"	"	B	.006	406	"	"	L	.004
108	"	"	C	.006	407	"	"	M	.004
109	"	"	D	.006	408	"	"	N	.004
110	"	"	E	.007	409	"	"	P	.005
111	"	"	F	.007	410	"	"	R	.005
112	"	"	G	.007	411	"	"	S	.005
229	"	"	H	.006	448	"	"	T	.004
230	"	"	I	.006	238	40.0	Y	A	.0038
231	"	"	J	.007	239	"	"	B	.0038
391	"	"	K	.006	241	"	"	C	.0038
392	"	"	L	.006	242	"	"	D	.0038
393	"	"	M	.006	244	"	"	E	.0052
394	"	"	N	.006	245	"	"	F	.0052
395	"	"	P	.007	246	"	"	G	.0052
396	"	"	R	.007	240	"	"	H	.0038
397	"	"	S	.007	243	"	"	I	.0038
446	"	"	T	.006	247	"	"	J	.0052
113	30.0	W	A	.005	412	"	"	K	.0038
114	"	"	B	.005	413	"	"	L	.0038
115	"	"	C	.005	414	"	"	M	.0038
116	"	"	D	.005	415	"	"	N	.0038
117	"	"	E	.006	416	"	"	P	.0052
118	"	"	F	.006	417	"	"	R	.0052
119	"	"	G	.006	418	"	"	S	.0052
232	"	"	H	.005	449	"	"	T	.0038
233	"	"	I	.005	127	50.0	Z	A	.003
234	"	"	J	.006	128	"	"	B	.003
398	"	"	K	.005	129	"	"	C	.003
399	"	"	L	.005	130	"	"	D	.003
400	"	"	M	.005	131	"	"	E	.004
401	"	"	N	.005	132	"	"	F	.004
402	"	"	P	.006	133	"	"	G	.004
403	"	"	R	.006	248	"	"	H	.003
404	"	"	S	.006	249	"	"	I	.003
447	"	"	T	.005	250	"	"	J	.004
120	35.0	X	A	.004	419	"	"	K	.003
121	"	"	B	.004	420	"	"	L	.003
122	"	"	C	.004	421	"	"	M	.003
123	"	"	D	.004	422	"	"	N	.003
124	"	"	E	.005	423	"	"	P	.004
125	"	"	F	.005	424	"	"	R	.004
126	"	"	G	.005	425	"	"	S	.004
235	"	"	H	.004	450	"	"	T	.003

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE II. Tripping-time, standard delay. 1/ 2/

Time delay percent rated current	Tripping-time delay at 25°C ±2°C (tripping time in seconds)													
	50 V dc				240 V 60 Hz				240 V 400 Hz					
	A		B		C		D		E		F		G	
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour	
125	70	7	7	.5	120	10	17	.7	---	---	---	---	---	---
150	---	---	---	---	---	---	---	---	60	5	5.8	.50	400	40
200	8	.6	1.4	.13	20	2.2	1.6	.13	20	2.1	1.9	.15	150	9.5
400	1.5	.15	.25	.031	2.3	.3	.25	.03	3.2	.4	.19	.02	19	1.9
600	.5	Inst	.12	Inst	.75	Inst	.13	Inst	.19	Inst	.08	Inst	1.6	Inst
800	.051	Inst	.051	Inst	.16	Inst	.07	Inst	.06	Inst	.05	Inst	.4	Inst
1,000	.026	Inst	.026	Inst	.04	Inst	.04	Inst	.045	Inst	.036	Inst	.043	Inst

See footnotes at end of table V.

TABLE III. Tripping-time, high-inrush design. 1/ 3/

Time delay percent rated current	Tripping-time delay at 25°C ±2°C (tripping time in seconds)													
	50 V dc				240 V 60 Hz						240 V 400 Hz			
	K		L		M		N		T		P		R		S	
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour	
125	100	10	12	.5	120	10	18	1	700	50	---	---	---	---	---	---
150	---	---	---	---	---	---	---	---	350	32	60	6	5 8	.6	500	60
200	20	2.5	1.5	.13	20	3	1.6	.16	70	10	20	2.1	2	.2	160	20
400	2	.36	.29	.031	2.3	.3	.3	.04	15	1.5	4	.4	.35	.035	19	2
600	1	.13	.15	Inst	1	.13	.17	Inst	7	.7	.6	Inst	.125	Inst	3.5	.250
800	.6	Inst	.06	Inst	.6	Inst	.09	Inst	3	.1	.06	Inst	.05	Inst	.5	.025
1,000	.29	Inst	.05	Inst	.29	Inst	.043	Inst	2	.01	.045	Inst	.036	Inst	.043	Inst
1,800 4/	no trip		no trip		no trip		no trip		no trip		no trip		no trip		no trip	

See footnotes at end of table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE IV. Tripping-time at high-low temperature, high-inrush and standard delay. 1/

Time delay percent rated current	Tripping-time at high-low temperature °C, (tripping time in seconds) 5/															
	50 V dc				240 V 60 Hz						240 V 400 Hz					
	A and K		B and L		C and M		D and N		T		E and P		F and R		G and S	
	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour	
125	500	.5	100	.1	500	1	100	.1	8000	25	---	---	---	---	---	---
150	---	---	---	---	---	---	---	---	900	12	500	.5	100	.1	1500	5
200	100	.1	10	.05	100	.05	10	.05	500	5	100	.1	10	.5	500	.5
400	20	Inst	3	Inst	20	Inst	3	Inst	100	.8	20	Inst	3	Inst	100	Inst
600	5	Inst	1	Inst	5	Inst	1	Inst	40	.1	6	Inst	1	Inst	5	Inst
800	2	Inst	.5	Inst	.5	Inst	.5	Inst	10	.05	.5	Inst	.5	Inst	.5	Inst
1,000	---	---	---	---	---	---	---	---	3	.01	---	---	---	---	---	---

See footnotes at end of table V

TABLE V. Tripping-time, standard nondelay. 1/ 2/

Time delay percent rated current	Tripping-time delay at -40°C ±2°C, +25°C ±2°, and +85°C ±2°C (tripping time in seconds)					
	50 V dc		240 V 60 Hz		240 V 400 Hz	
	H (nondelay)		I (nondelay)		J (nondelay)	
	Max	Min	Max	Min	Max	Min
100	no trip one hour		no trip one hour		no trip one hour	
125	0 15	Inst	0.15	Inst	---	---
150	---	---	---	---	0.15	Inst
200	0.07	Inst	0.05	Inst	0.070	Inst
400	0.032	Inst	0.02	Inst	0.032	Inst
600	0.02	Inst	0.017	Inst	0.020	Inst
800	0.02	Inst	0.017	Inst	0 020	Inst

1/ Circuit breakers shall not trip at 100 percent rated current. Characteristics A, B, C, D, H, I, K, L, M, and N must trip at 125 percent rated current, E, F, G, J, P, R, and S at 150 percent. Any characteristic may trip between 100 percent and the must-trip value. Instantaneous (Inst) is defined as less than 15 milliseconds.

2/ Voltage, frequency, and tripping-time delay codes A, B, C, D, E, F, G, H, I, and J are standard delays without the high-inrush feature.

3/ Voltage, frequency, and time delay codes K, L, M, N, P, R, and S incorporate the high-inrush or transient suppression feature.

4/ High-inrush test shall be performed using one alternation which has a peak value of 1,800 percent of rated current. 400 Hz and dc delays are subjected to a 400 Hz waveform, 60 Hz delays shall be subjected to a 60 Hz waveform.

5/ High and low test temperature tolerances are ±2°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

Circuit breakers covered by this specification sheet are substitutable for the manufacturer's part numbers as shown in table VI. This information in no way implies that the manufacturer's part number is substitutable for the military part number.

TABLE VI. Supersession and substitution data.

Superseding military part number	Superseded manufacturers part number	
	FSCM 81541	FSCM 74193
	Type APL-111 UPL-111	Type AM3
M55629/6-XXX	The complete part number consists of the type (above) plus identification codes for comparable internal connections, auxiliary switch, voltage, frequency, time delay, and current rating. UL recognition and moisture fungus proofing is also superseded by the military circuit breakers.	

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians.
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - ME, MI
Navy - AS, OS
Air Force - 17, 99
DLA - ES

User activities:
Army - AV
Navy - MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5925-0163-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.