MIL-P-82530(OS)
18 April 1968

Superseding
NOTS XS 456 Rev. A
31 January 1968

MILITARY SPECIFICATION

FOR

PRIMER, ELECTRIC,

MK 137 MOD 0

This specification has been approv ed by the Naval Ordnance Systems Command, Department of the Navy

1. SCOPE

1.1 This specification establishes the requirements for one type of Electric Primer Mk 137 Mod O. (See paragraph 6.1 for intended use and description.)

2. APPLICABLE DOCUM ENTS

2. 1 The follow ing documents, of the issue in effect on the date of invitation for bids, form a part of this specification to the extent specified herein, except as noted.

SPECIFICATIONS

FEDERAL

PPP-B-566	Boxes, Folding, Paperboard
PPP-B-601	Boxes, Wood, Cleated- Plywood
PPP-B-676	Boxes, Setup
QQ-A-225/1	Aluminum Alloy Bar, Rod, and Wine, Rolled, Drawn, or Cold Finished

FSC - 1340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-1051)	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-331	Fuze and Fuze Components, Environmental and Performance Tests for
MIL-STD-414	Sampling Procedures and Tables for Inspection by Variables for Percent Defective

DRAWINGS

BUREAU OF NAVAL WEAPONS

LD 268000	Primer: , Electric, Mk 137 Mod 0 and all drawings listed the reon

(Copies of specifications, standards, drawings, and publications requested by contractors in connection with specific procurement functions should be Obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other Publications

Interstate Commerce Commission

49 CFR Part 71 to 75	Interstate Commerce Commission Rules and Regulations for the i-: anspor tation of Explosives and other Dangerous Articles

(The Interstate Commerce Commission regulations are now a part of the Code of Federal Regulations and are available from the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402, Orders [or the above publication should cite “the latest issue and supplements thereto”.)

3. REQUIREMENTS

3.1 General requirements. Unless otherwise specified in the contract or order, all materials and treatments of materials and parts used in the manufacture of the primer shall be in accordance with the requirements specified herein and with the applicable documents listed in LD 268000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

3.2 Preproduction samples. Unless otherwise specified in the contract or order, preproduction samples of the pruner shall be manufactured using the methods and procedures proposed for production. The sample shall be tested as specified in Section 4 herein and is for the purpose of determining that prior to starting production, the contractor's production methods arc capable of yielding items that comply with the technical requirements of the contract.

3.3 Performance and product characteristics. The primer shall meet the following performance and product characteristics.

3.3.1 Continuity and resistance. The primer circuit shall be continuous with a resistance of not less than 0.14 ohm or more than 0.20 ohm.

3.3.2 Electri nonfiring sensitivity. The primer shall not function when subjected to a direct current of 1.0 plus or minus 0.1 ampere for a mimimum. of 10 seconds.

3.3.3 Insulation resistance. The resistance between the shorted lead wires and the case shall be not less than 50 megohms when an alternating potential of 1000 volts is applied for 1 second.

3.3.4 Direct current functioning. The primer shall function in 5 milliseconds or less when subjected to a DC voltage which will produce a current of 5 plus or minus O. 15 amperes through the bridge wire.

3.3.5 Capacitor discharge functioning, The primer shall function within 400 microseconds or less when subjected to the discharge of a 450 microfarad, m aximum. capacitor charged to 24 plus 4 minus 0 volts DC.


3.3.6 Output. The primer shall produce an indentation in the aluminum test block, shown in Figure 1, of between 0. 010 and 0.050 inch.

3.4 Env -ironmental requirements. Unless otherwise specified. the primer shall be capable of conforming to the performance and product characteristics of this specification after being exposed to the environments and all conditions specified herein. (See 6.2f)


3.4.1 Vibration. The primer shall withstand vibration in accordance with MIL-STD-331, Test 104, and thereafter shall meet only the requirements of continuity and resistance, 3.3.1, and capacitor discharge functioning, 3.3.5.

3.4.2 Temperature and humidity, The primer shall withstand temperature and humidity in accordance with MIL-STD-331, Test 105, or in accordance with the alternate procedure described in 4.5. 1.2.1 and thereafter shall meet only the requirements of capacitor discharge functioning. 3.3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

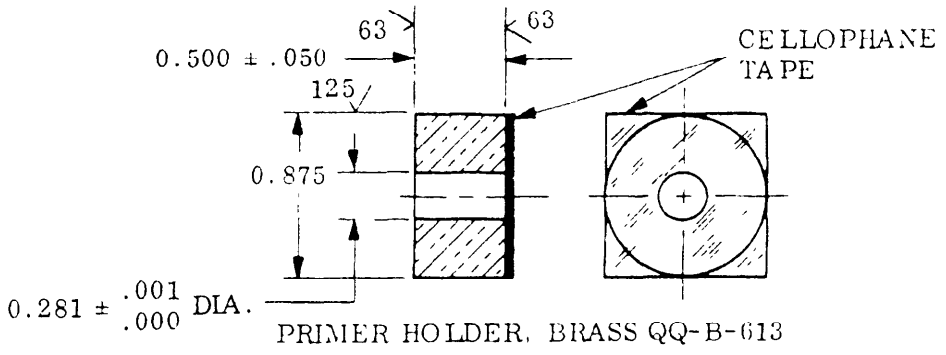

PRIMER HOLDER, BRASS QQ-B-613

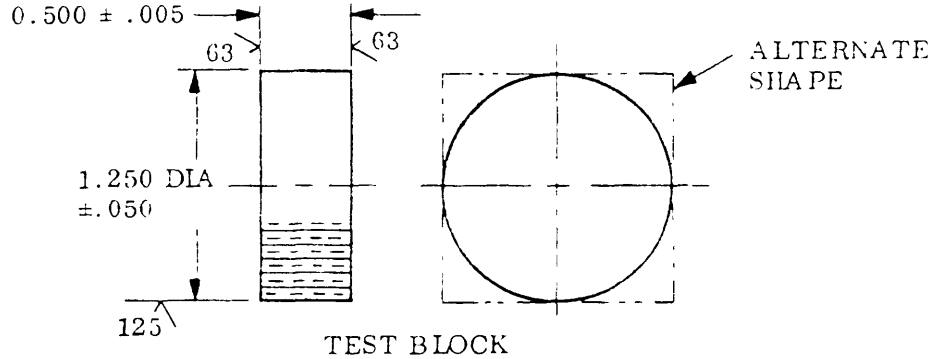

TEST BLOCK

ALUMINUM 1100 TEMPER F PER QQ-A-225/1

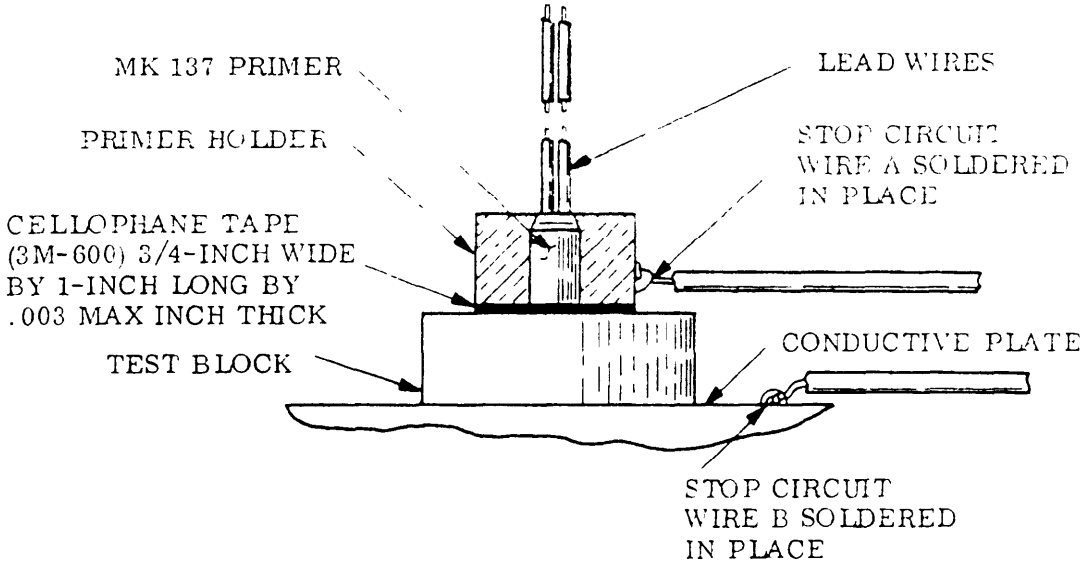


Figure 1 Primer Output Assembly (With Stop Circuit)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

3.4.3 Shock. The primer shall withstand shock in accordance with MIL-STD-331, Test 101, or in accordance with the alternate procedure described in 4.5.1.3.1, and thereafter shall meet only the requirements of continuity and resistance, 3.3.1, and capacitor discharge functioning, 3.3.5.

3.5 Workmanship. The workmanship and finish shall be of sufficiently high grade to assure satisfactory operation consistent with the requirements of this specification. All parts used in the assembly shall be thoroughly clean and free of excess materials, chips, and loose or splattered foreign materials. The standards of workmanship exhibited in any approved preproduction sample, subject to any qualification stated in the Government's notice of approval, shall be determinative of the requirements of the contract relative to workmanship insofar as not specifically covered by applicable specifications.

4. QUALITY A SSURANCE PROVISIONS

4. 1 Responsibility for inspection. Unless otherwise se specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commerical labor atory acceptable to the Government. The Gover nment reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection of the primers shall be classified as follows:

2. Preproduction and periodic production inspection (See 4.5.)

b. Quality conformance inspection (See 4. 6.)

4.3 Sampling. (See 6.2.1)

4.3.1 Lot size. The term "lot" snail mean "inspection lot", that is a collector of product submitted by a supplier for inspection. Unless otherwise specified in the contract or order, the number of product in each lot shall be ten thousand (10,000).

4 3.2 Preproduction sample, A preproduction sample of two hundred and ten (210) primers, manufactured in accordance with 3.2, shall be subjected to the preproduction tests detailed in 4.5. Acceptance of the preproduction sample shall be judged in accordance with MIL-STD-105D and MIL-STD-414, as specified in Table I. Further production of the primers by the supplier, prior to approval of the preproduction sample, shall be at the supplier's risk.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:13Z
Check the source to verify that this is the current version before use.

Table I. Preproduction and Periodic Production Test Sequence

Test	Paragraph Number	Judge in accordance with MIL-STD	AQL	Test Quantities	
				Preproduction	Periodic
Quality Conformance Inspection	4.6				
Continuity and Resistance	4.6.1.1	-105D	1.0	210	50
Electrical Nonfiring Sensitivity	4.6.1.2	-105D	0.065	200	-
Insulation Resistance	4.6.1.3	-105D	0.4	34	-
Direct Current Functioning	4.6.1.4.1	-414	1.0	20*	-
Capacitor Discharge Functioning	4.6.1.4.2	-414	1.0	20*	-
Output	4.6.1.4.3	-414	1.0	20*	-
Vibration	4.5.1.1			17**	17**
Quality Conformance Inspection	4.6				
Continuity and Resistance	4.6.1.1	-105D	1.0	13	13
Temperature and Humidity	4.5.1.2			17**	17**
Shock	4.5.1.3			16**	16**
Quality Conformance Inspection	4.6				
Continuity and Resistance	4.6.1.1	-105D	1.0	13	13
Quality Conformance Inspection Capacitor Discharge Functioning	4.6 4.6.1.4.2	-105D	1.0	50**	50†

* Units are expended during functioning.
* * Units are subjected to only one environmental test.
† Test only units that have been subjected to environmental tests,

4.3.3 Periodic production sample. From designated lots (See 6. 2f) of ten thousand (10, 000) or less, a random sample of fifty (50) primers shall be selected, These sample units shall be subjected to the tests of 4.5. The primers shall be considered satisfactory if they meet all specification and pertinent draw ing requirements and withstand the tests specified in 4.5. (See Table I.) When a lot is judged defective, acceptance of all units in the lot shall be withheld and the contractor shall:

a. Determine the cause of the defect.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:13Z
Check the source to verify that this is the current version before use.

b. Take the necessary action, with the concurrence of the procuring activity, to correct or eliminate the defect from all units in the lot and, if so directed by the procuring activity, from those units previously shipped.

c. Submit to the procuring activity for approval the proposed corrective action to prevent recurrence of the defect.

4.3.4 Quality conformance inspection sampling. Samples shall be selected and tested to determine the acceptability of the primer as specified in 4.6.

4.4 Test equipment and test conditions.

4.4.1 Quality conformance inspection equipment. The following items of test equipment are required to per form the quality conformance inspection tests:

Equipment	Capability
a. Ohmm et er, current limited	Measure resistance over approximate range of 0 to 1. 0 ohm with an accuracy of 0. 005 ohm and maximum current limited to less than 10 milliamperes.
b. Megohmmeter	Measure insulation resistance of 50 megohms at an applied potential of 1000 VAC.
c. Electrical nonfiring sensi - tivity and direct current functioning equipment	See Figures 1 and 2. The electrical counter shall measure time intervals from 10 to 1000 microseconds with a resolution of 10 microseconds.
d. Capacitor discharge functioning equipment	See Figures 1 and 3. The electrica counter shall meet the same require - ments as that in 4.4. 1c,
e. Output measuring equipment	See Figure 4. The dial indicator shall have a stem approximately 0.1 inch in diameter with a conical tip of 30 degrees, included angle terminating at a rounded point having a radius of O. 025 inch.

4. 4.2 Preproduction and periodic production test equipment. Test equipment required to perform the preproduction and periodic production tests is specified in applicable sections of MIL-STD-331 and in 4.4.1 of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:13Z
Check the source to verify that this is the current version before use.

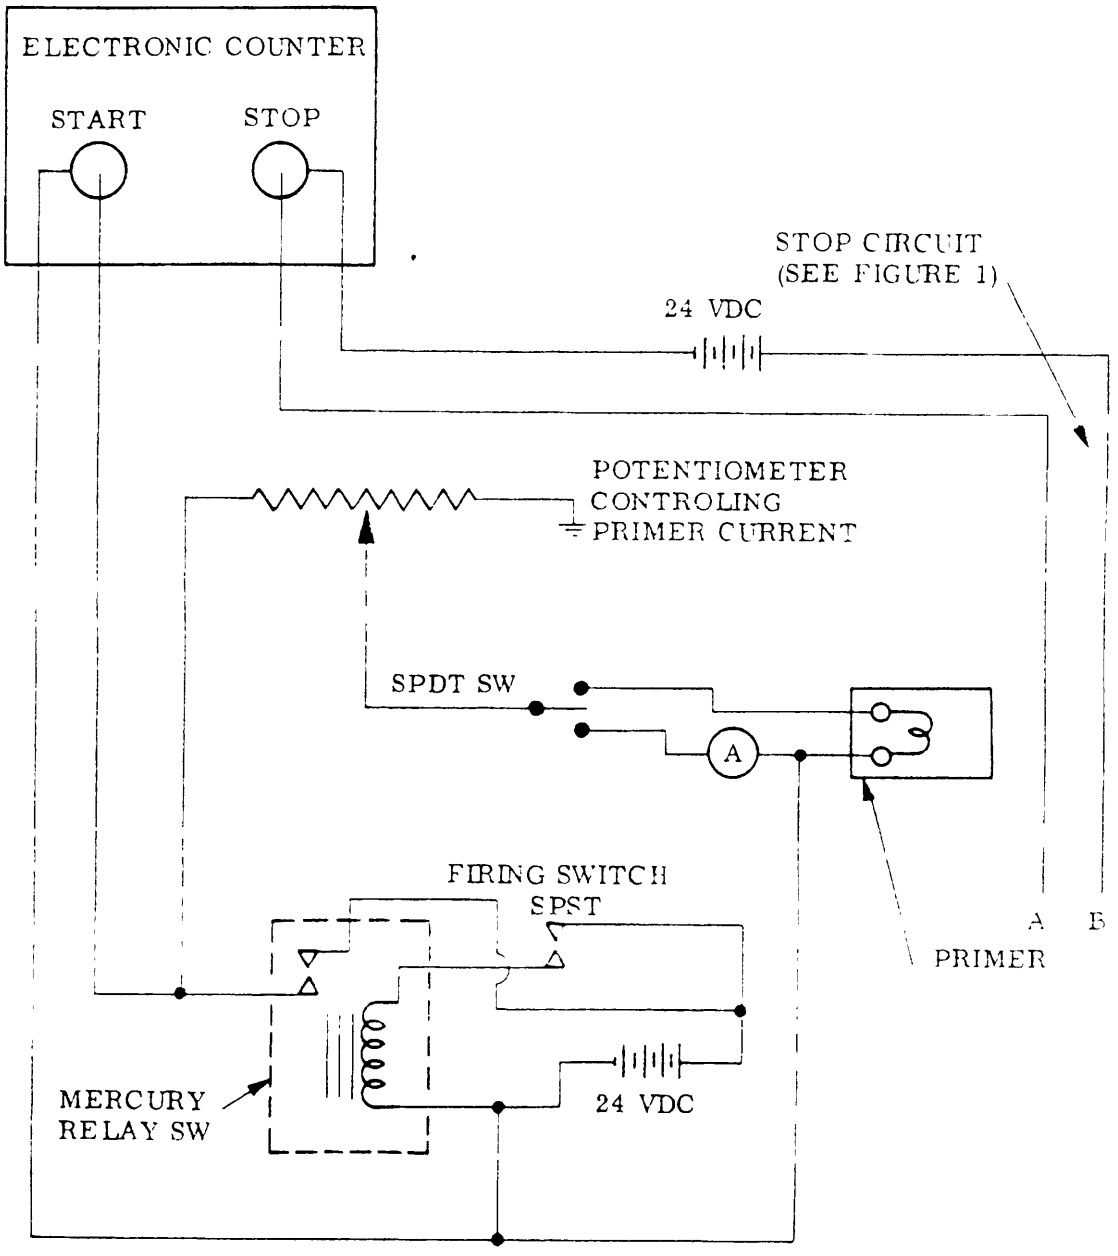


Figure 2. Direct Current Firing Test Setup

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:13Z
Check the source to verify that this is the currenversion before use.

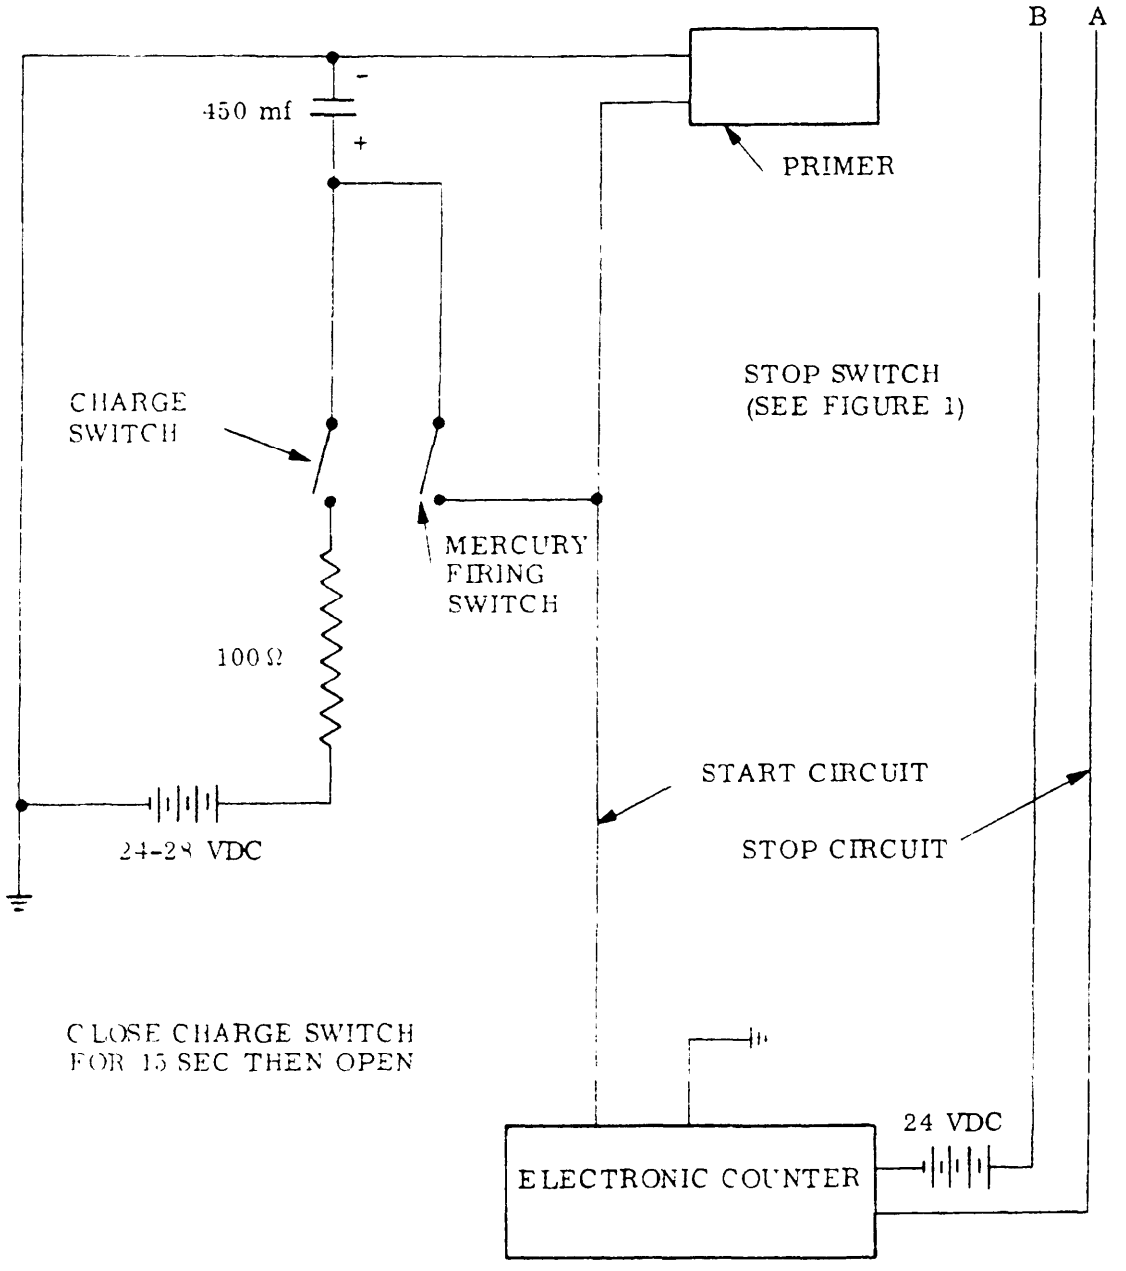


Figure 3. Capacitor Discharge Firing Test Setup

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

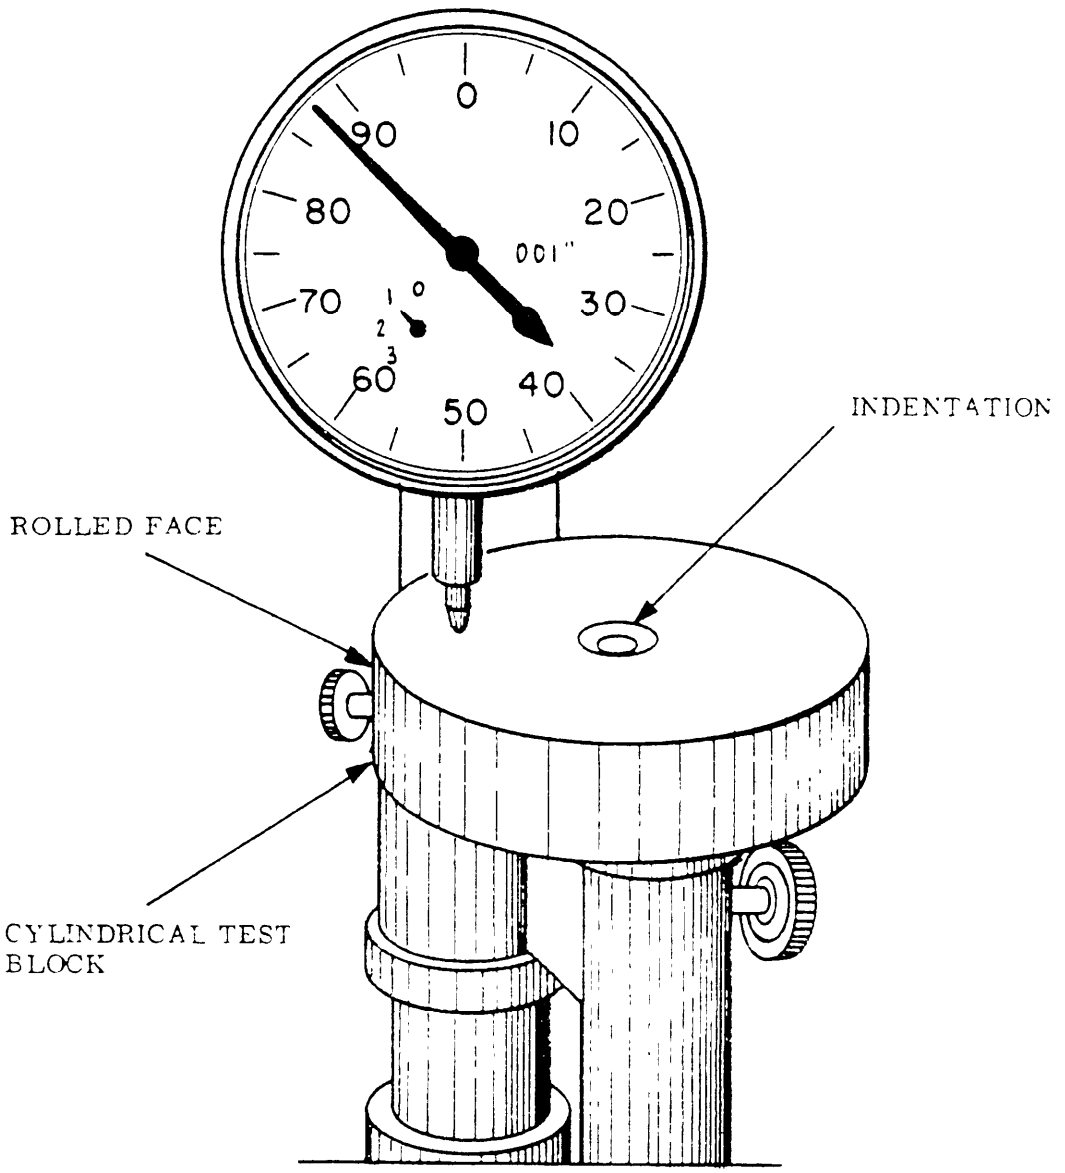


Figure 4. Correct Arrangement for Measuring Depth of Indentation After Zero Setting

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

4.4.3 Test conditions. Unless otherwise specified, the primer shall be subjected to the preproduction and periodic production tests and quality conformance inspection tests under the follow ing conditions:

a.	Temperature	Room ambient (65 to 95 degrees F)
b.	Altitude	Normal ground atmospheric pressure
c.	Humidity (Relative)	Room ambient up to 95 percent

4.5 Preproduction and periodic production inspections. The preproduction and periodic production samples shall be subjected to the tests specified in paragraph 4.5.1 after satisfactory passing the quality conformance inspections as indicated in Table I.

4.3.1 Test procedure. Subject the primer to the test sequence listed in Table I, Unless otherwise specified in the individual test paragraph, the quality conformance inspection, as specified in Table I, shall be performed subsequent to environmental tests under test conditions specified in 4.4.3. Failure of the primer to pass any one of these tests shall constitute a defective unit.

4.3.1.1 Vibration. The primer shall be mounted to a suitable holding fixture with the leads taped to the fixture, and subjected to vibration tests in accordance with MIL-STD-331, Test 104, Procedure II. After vibration, the primer shall pass only the continuity and resistance test 4.6.1.1 and capacitor discharge functioning test 4.6.1.4.2.

4.5.1.2 Temperature and humidity. The primer shall be subjected to temperature and humidity testing as specified in MIL-STD-331, Test 105, for one (1) JAN cycle (two weks), or the primer may be subjected to a total of 21 complete temperature and pressure cycles as described in 4.5.1.2.1. After cycling the primer shall pass only the capacitor discharge functioning test 4.0.1.4.2.

1.5.1.2.1 Temperature and humidity alternate test procedure. This is an alternate procedure, which m ay be performed in place of MIL-STD-331, Test 105, specified in 4.5.1.2. The primer shall be submerged in water in a suitable test chamber. The primer shall then be subjected to 15-minute overall elapsed time intervals of successive submersion and vacuum (1) in water at a temperature of 160 degrees F plus or minus 10 degrees F and at an absolute pressure of 58 inches of mercury: (2) a partial vacuum equivalent to a maximum of 5 inches of mercury absolute; (3) a tap water submergence at an absolute pressure of 58 inches of mercury; and (4) a repeat of the vacuum cycle. The aforementioned steps, (1) through (4), constitute one complete cycle. A minimum temperature differential of 90 degrees F shall be maintained between the 160 degrees F hot-water cycle and the tap-water cycle. Suitable instrumentation shall be furnished to indicate that the conditions of the test are being met, and

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:13Z
Check the source to verify that this is the current version before use.

that the apparatus is cycling properly. The water shall be removed from the test chamber before pulling the vacuum. The primer should be placed in the chamber at the end of one ofthe water-under-pressure steps. The entire test procedure shall be repeateted continuously for 21 cycles.

4. 5.1.3 Shock. The primer shall be clamped in a suitable holding fixture with the leads taped to the fixture, and subjected to shock in accordance with MIL-STD-331, Test 101, or with the alternate test procedure described in 4.5.1.3.1. After shock, the primer shall pass only the continuity and resistance test, 4. 6.1.1 and the capacitor discharge functioning test, 4.6.1.4.2.

4.5. 1. 3.1 Shock, alternate test procedures. This is an alternate proce - dure that may be performed in place of MIL-STD-331, Test 101, specimen in 4.5.1.3, The holding fixture, with primers, shall be dropped 20 times succes- sively, top surfaces up, in such a manner that the bottom, surface of the text fixture lands squarely on a two-inch planking supported by a minimum of three inches of cone rete. The drop height shall be a minimum of 5 feet. The fixture, w ith primers, shall then be dropped an additional 20 times in such a manner that the fixture lands on one of the bottom edges at an angle of approximately 45 degrees relative to the planking. The angle drops shall be made such that each of the bottom, edges receives five impacts.

4.6 Quality conformance inspection. Samples selected using the plans and procedures set forth in Table II of this specification shall be subjected to the tests and examinations as described in 4.6.1.

Table II. Quality Conformance Tests and Examinations and AQL

Test	Sampling Plan	AQL	Test Paragraph
Continuity and Resistance	*	1.0	4.6.1.1
Electrical Nonfiring Sensitivity	*	0.065	4.6.1.2
Insulation Resistance	*	0.4	4.6.1.3
Direct Current Functioning	**	1.0*	4.6.1.4.1
Capacitor Discharge Functioning	**	1.0*	4.6.1.4.2
Output	**	1.0	4.6.1.4.3
Visual Examination	±	±	4.6.2
Packaging, Packing and Marking	±	±	4.7

*MIL-STD-105D Inspection Level II
** MIL-STD-414 Normal Inspect Ion, variability unknown, standard deviation method
*The occurrence of one or more duds shall be cause for rejection of the lot.
*One hundred percent inspection; defect is cause for rejection of indvidual unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

4. 6,1 Test procedure. The primer shall be subjected to the tests and examinations as outlined herein. Unless otherwise specified, inability of the primer to pass the tests and examinations shall constitute a failure.

4. 6. 1.1 Continuity and resistance. Using the ohmmeter specified in 4.4. la, measure the resistance of the primer. The resistance shall be not less than O. 14 ohm nor more than 0.20 ohm.

4. 6.1.2 Electrical non firing sensitivity. Using the equipment specified in 4.4.1c, subject the primer to a DC current of 1.00 plus or minus 0.10 ampere for a minimum of 10 seconds. The primer shall not function.

4. 6. 1.3 Insulation resistance. Using the megohmmeter specified in 4.4, 1b, subject the primer to an alternating potential of 1000 volts. applied between the primer case and the shorted lead wires for a minimum of one second. The resistance shall not be less than 50 megohms.

4. 6.1.4 Functioning tests.

4.6.1.4. 1 Direct current functioning. The direct current time test shall be conducted utilizing the equipment specified in 4.4. 1c. The primer shall be subjected to a DC firing current adjusted to 5.00 plus or minus 0.15 amperes. The primer shall function within an upper specification limit of 5.0 milliseconds. The occurrence of one or more duds shall be cause for rejection of the lot.

4. 6. 1. 4.2 Capacitor discharge functioning. The capacitor discharge test shall be conducted utilizing the equipment specified in 4.4.1d. The primer shall be subjected to the discharge of a 450 microfarad (maximum) capacitor charged to 24 plus 4 minus 0 volts. The primer shall function within an upper specification limit of 400 microseconds. The occurrence of one or more duds shall be cause for rejection of the lot.

4.6.1.4.3 Output. The primer shall be placed in a suitable test fixture indicated in Figure 1 or equivalent, and subjected to the discharge of a 450 microfarad (maximum) capacitor having a charge of 24 plus 4 minus o volts. This test may be conducted at the same time as the capacitor discharge functioning test 4.6.1.4.2. The primer shall be inserted in brass holders such that the forward face of the case rests tightly against the insulation tape, over the aluminum block. After firing, the primer output shall be evaluated by measuring the depth of indentation caused in the aluminum block. A dial indicator reading in thousandths of an inch shall be mounted over a horizontal surface plate in such a manner that the indicator stem is perpendicular to the surface plate. The aluminum disc shall be placed, indented side up, in a ring-type holder, so arranged that the periphery of the bottom face of the disc is approximately parallel to the surface plate. The indicator tip shall be lowered to the bottom of the disc Indentation, and the indicator dial set to zero. Four readings, measured in thousandths of an inch, shall be determined near the periphery of

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

the indentation at approximately equidistant points. The arithmetical average of the four measurements shall be considered as the average depth of indentation for that particular disc. The depth of indentation shall be within the lower specification limit of 0.010 inch and the upper specification limit of 0.050 inch.

4.6.2 Visual examination. Visual examination shall be made on each primer submitted for delivery to the procuring activity. The primer shall be examined for conformance to the requirements of good Workmanship in paragraph 3.5. Nonconformance is cause for rejection of the individual unit.

4.7 Packaging, packing, and marking. The primer shall be examined for conformance to the prescribed packaging, packing, and marking requirement ents of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Twenty-five (25) to fifty (50) primers shall be bundled together and secured with aluminum foil. A total of one hundred (100) primers shall be packaged in 2 setup paperboard box, w hich meets minimum board requirements for weight of contents as contained in Table III of PPP-B-566 or Table II of PPP-B-676.

5.2 Packing. Fifty. (50) boxes, each containing one hundred (100) primers (or a total of five thousand (5, 000) primers), packaged as described in 5.1, shall be packed in a nailed wooden box conforming to the requirements of PPP-B-601,

5.3 Marking, In addition to any special marking required by the contract or order, unit packages, intermediate packages, and shipping containers shall be marked in accordance with the requirements of MIL-STD- 129 and 49 CFR Part 71 to 78.

5.4 Primer data cards. Data cards, 3 inches by 3 inches, made from commercial white cardboard, printed as shown in Figure 5, shall be filled out for each lot of primers and five (5) data cards shall be placed in each packaging container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

PRIMER, ELECTRIC, MK 137 MOD 0 DATA CARD				
Spec _____	Material	Manufacturer	Lot or Batch No.	Date Mo Yr
Loaded by _____	Case			
Date: Mo____ Yr____	Plug Subassembly			
Contract _____	Initiation Charge			
No. _____	Booster Charge			
No. in Box _____	Main Charge			
Prod. Lot Size _____ Lot Type ( ) Regular ( ) Mixed ( ) Special	Remarks			

Figure 5. Primer Data Card Format

6. NOTES

6.1 Intended use and description.

6.1.1 Intended use. This primer is Intended to be used in conjunction with other ordinance items such as detonator Mk 59.

6.1.2 Description. The primer is a resistance wire-bridge-type electric primer designed to be insensitive to 1-ampere DC firing current. The primer is initiated by either a capacitor discharge or a DC firing current and contains approximately 170 milligrams of primary explosive. The design of the unit and materials of construction will permit the use of this primer in severe environmental conditions.

6.2 Ordering data. Procurement documents should specify the following.

a. Title, number, and date of this specification

b. Required level of packaging

c. Required level of packing

d. Any exceptions to this specification

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:13Z
Check the source to verify that this is the current version before use.

e. Test and inspection reports on all tests specified herein shall be prepared and submitted to the procuring activity.

f. Designation of particular lots to be subjected to periodic production tests

6.2.1 Additional samples. Additional samples required because of failure of any sample(s) to pass the prescribed inspections shall be prov ided and inspec - ted at the expense of the supplier.

6.3 Preparation for delivery criteria. Criteria for the use of the proper level of packaging, packing, and marking shall be as specified in Section 5.

6. 4 Advisory handling instructions for initiation, booster. and main charges.

6.4.1 Preparation of initiation and booster charges involves the handling of normal lead styphnate. which is a heat and friction sensitive explosiv e. The lead azide base charge is also friction sensitive. Therefore, extreme care in all operations using these materials should be taken, and quantit ies on hand should be held to the minimum amount required to maintain continuous production. Special car e shall be exercised to prevent the solvent contents from decreasing below those specified in approv ed draw ings by adding additional soil'cnf ~~'bet: needed. Any composition that becomes dry around the edges of the contain'?r should be carefully wet down before any attempt is made to scrape the sides of the container, If at any time the composition is spilled, it should be cleaned up immediately. All personnel handling these compositions must wear approved clothing and must work behind suitable barricades whenever possible.

6.4.2 All fixtures, equipment, benches, floors, etc., shall be pr operly grounded to prevent accidental ignition due to static discharges, electrical arcing, or sparking.

6.4.3 The clear lacquer and butyl acetate thinner that is mixed with the lead styphnate confers 2 degree of resistance to explosion or ignition by impac or friction, or ignition by a combination of impact and friction, However, it is emphasized that the resistance to explosion obtained by wetting in the prescribed manner is of a lower order than that obtained by water wetting. Butyl acetate is flammable and can produce ignitable vapors.

6.4.4 All utensils and tools shall be kept clean and free of any dried charge. Empty dishes shall be placed in approved containers,

6.5 General safety p recautions. The loading, assembly, and handling of explosives, ammunition, ammunition components, fuzes, detonators, primers, tracers, boosters, pyrotechnics, etc , and subassemblies thereof, involve hazardous operations and therefore require suitable explosive safety precautions. Use of this specification shall not be construed as to relieve the contractor or manufacturer of responsibility for the safety of his operations. The following

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

paragraphs list the minimum provisions that a contractor or manufacturer (loader) of these items should observe in order to fulfill his responsibility for safety. At Naval ordnance Systems Command and other Government plants, these provisions are mandatory. Such other warnings and precautions pertinent to the operational effectiv eness or safety during use or loading of the specified item, are included in the detail provisions of the specification.

6.5.1 All loading operations should be conducted in a neat and orderly manner.

6.5.2 Safe equipment and methods should be utilized for transporting and handling explosi ves and loaded parts. Where required, remote control barricaded handling equipment shall be used for explosive operations, such as mixing, pouring, weighing charging, sifting, drying, pressing, casting, and crimping.

6.5.3 Personnel handling detonators, primers, delay elements, leadins, boosters. and related parts that affect functioning should, insofar as is practicable avoid using bare fingers or improper equipment to prevent damage. Corrosion or deterioration from perspiration or other contaminating deposits.

6. 5.4 The exposure of explosiv e materials and related parts should be so controlled as to minimize the absorption of moisture from the atmosphere or other sources during loading and handling operations.

6.5.5 All explosives and completely or partial ly loaded items should be stored in suitable storage magazines located in accordance with the American Table of Distances (ATD) or other applicable safety standards. and, u'bile in process, kept in safety lockers and chests if in loading rooms, or in adequate ready or service magazines located in accordance with intra-plant distances when outside of loading rooms. For Navy explosiv es loading plants, the provisions of the Armed Services Explosives Safet y Board covering quantity-distance relations for explosives shall apply.

6. 5.6 Proper care should be exercised at all time. s to protect personnel from accidents, fires, or explosions, and to limit damage to equipment and loading areas. In this connection, the following precautionary measures should be observed.

6.5.6.1 Employ properly proportioned and properly located protective barricades, screens, or shields at all required points.

6.5.6.2 Keep only minimum limited quantities of explosives and completed or partially loaded parts present at each stage of operation.

6.5.6.3 Keep explosives and explosive parts in approved covered receptacles w ith covers in place when material is not being taken out of or put into the receptacles. Where necessary, receptacles should be conductive to ground electrostatic charges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

6.5.6.4 Protect operations from electrostatic charges by effectively grounding all machinery, equipment, and fixtures; and, where necessary, employ suitable grounded conductive coverings for floors, work benches and tables, and workers' conductive shoes. Workers' clothing of a type to minimize the accumulation of static charges should be employed. Fabrics such as silk and nylon, which promote static generation, should be avoided. Additional grounding devices such as grounded bracelets for workers should be employed where operations are conducted with items that are usually sensitive to initiation by static electricity. Such items include initiating explosives, tracer mixtures, and low-energy-type electric primers, detonators, and squibs. The latter types of items should have the free ends of lead wires bared and twisted together, and be packed in relatively small groups, wrapped in bare noninsulated aluminum foil or other uncoated metal foil. During assembly and processing operations, such sensitive electric items should be short circuited by clips or other devices until installed with safety shunt in the final device. Additional precautions for these items should include mechanical shielding of these items from induced electric currents generated by sources such as lightning, static radiations from communications apparatus, radar, or high frequency heating apparatus. Where necessary for safety, humidity (see 6.5.4) of work rooms should be increased as required to lessen electrostatic effects without excessive moisture absorption.

6.5.6.5 Protect all explosive operations from effects of electric current originating from equipment, such as soldering irons, heater switches, wiring, motors, lights, and test instruments, by suitable insulation, grounding, separation, or shielding. Such electric sources may initiate explosives by heat, sparks, and arcs, or due to completing an electric circuit through an electric primer, detonator, or squib. Circuits may be inadvertently completed, for example, from a defective electronic soldering iron through a grounded contact. All electric-type primers, detonators, or squibs provided with wire leads should have the free ends of the wires bared and twisted together to short circuit each unit, except when in process of assembly into a finished item. Where practicable, removable short circuiting clips or other devices should be employed during manufacturing operations involving electric primers, detonators, or squibs.

6.5.6.6 Enforce, where necessary, the wearing of suitable safety footwear, gloves, goggles, respirators, and impregnated garments to protect personnel against burns, poisoning, and associated industrial hazards.

6.5.6.7 Allow no fires or exposed electrical or other sparking equipment and little or no flammable material to be present in loading, handling and storage spaces. Enforce proper MATCH and NO SMOKING rules where necessary.

6.5.6.8 Enforce good housekeeping and maintain effective policing, inspection, and supervisory methods throughout the loading area and surroundings. Employ effective cleaning methods periodically to minimize the accumulation of explosives or explosive dust and other contamination upon, and as ure its removal from, floors, walls, ceilings, ledges, tables, benches, piping and equipment or the items loaded. Clean up any spilled material immediately.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION
MIL-P-[illegible]C) PRIMER, ELECTRIC MK 137 MOD 0

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING.

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426

C-8878

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Ordnance Systems Command
Washington, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

NAVAL ORDNANCE SYSTEMS COMMAND (ORD 9343)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

MILITARY SPECIFICATION

PRIMER, ELECTRIC, MK 137 MOD 0

This amendment forms a part of Military Specification MIL-P-82530(OS) of 18 April 1968 and has been approved by the Naval Ordnance Systems Command, Department of the Navy

Wherever it appears in specification delete "Bureau of Naval Weapons" and substitute "Naval Ordnance Systems Command"; also delete "BuWeps" and substitute "NAVORD".

Page 2, paragraph 2.1. Insert the following:

"PUBLICATIONS

DEPARTMENT OF DEFENSE

4145. 26	DOD Contractors' Safety Manual for Ammunition, Explosives, and Related Dangerous Material"

Pages 16 through 18. Delete paragraph 6.5 and all subparagraphs and substitute:

"6.5 General safety precautions. The supplier shall conform to the General Safety Precautions as specified in DOD 4145.26M."

Preparing Activity
Navy - OS
Project No. 1340-N276

FSC 1340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

NOTICE OF VALIDATION

INCH POUND

MIL-P-82530(OS)1
NOTICE 1
23 February 1989

MILITARY SPECIFICATION

PRIMER, ELECTRIC, MK 137 MOD O

MIL-P-82530(OS)1, dated 27 July 1970, has been reviewed and determined to be valid for use in acquisition.

Custodian:
Navy - OS

Preparing activity:
Navy - OS

AMSC N/A

FSC 1340

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.