MIL-I-6140B
20 October 1972
SUPERSEDING
MIL-I-6140A(ASG)
15 September 1954

MILITARY SPECIFICATION

INSIGNIA, NATIONAL AIRCRAFT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the design, size, and location of the national insignia to be applied on the exterior surfaces of military aircraft.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-I-18464	Insignia and Markings for Naval Weapons Systems
MIL-M-25047	Markings and Exterior Finish Colors for Airplanes, Airplane Parts and Missiles (Ballistic Missiles Excluded)

STANDARDS

Military

FED-STD-595	Colors

PUBLICATIONS

Technical Manual - Department of the Army

TB 746-93-2	Painting and Marking of Army Aircraft

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:39Z
Check the source to verify that this is the current version before use.

PUBLICATIONS (Continued)

Technical Manual - Department of the Air Force

T.O. 1-1-4 Exterior Finishes, Insignia and Markings Applicable to Aircraft and Missiles

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

* 3.1 Design and construction. The national insignia, as specified in Figure 1, shall consist of an insignia-white 5-pointed star located inside an insignia-blue circumscribed circle. An insignia-white rectangle, one radius of the blue circle in length, and 1/2 radius of the blue circle in width shall be located on each side of the star. The top edges of the rectangle shall be placed to form a straight line with the top edges of the horizontal two star points beneath the top star point. An insignia red horizontal stripe 1/6 the radius of the star shall be centered in the white rectangles at each end of the insignia. An insignia-blue border, having a width 1/8 the radius of the blue circle circumscribing the star shall outline the entire design except that when the insignia is to be applied on a sea blue, dark blue, or black background, the insignia-blue circumscribed circle and the insignia blue border may be omitted. The construction of the star is obtained by marking off five equidistant points on the circumscribed circle, and connecting each point to the two non-adjacent points.


NOTE: The inside edge of each interior rectangle shall be concave, and shall have the same arc as the inside-blue circumscribed circle. The inside edge of each outer rectangle shall not be depicted.

3.2 Wing insignia.


3.2.1 Location. Two insignia shall be placed on the wings of all aircraft. The national insignia shall be placed on the upper surface of the left wing and the lower surface of the right wing. On biplanes, one insignia shall be placed on the upper surface of the upper left wing and the other insignia on the lower surface of the lower right wing. The insignia shall be placed at a distance from the wingtip equal to 1/3 of the distance from the fuselage to the wingtip, measured from the center of the insignia.

3.2.1.1 Lateral deviation. The national insignia may be moved inboard the minimum distance necessary where wingtip floats of seaplanes interfere, when space is not available for the minimum size specified, or when otherwise impracticable to place as specified.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:39Z
Check the source to verify that this is the current version before use.

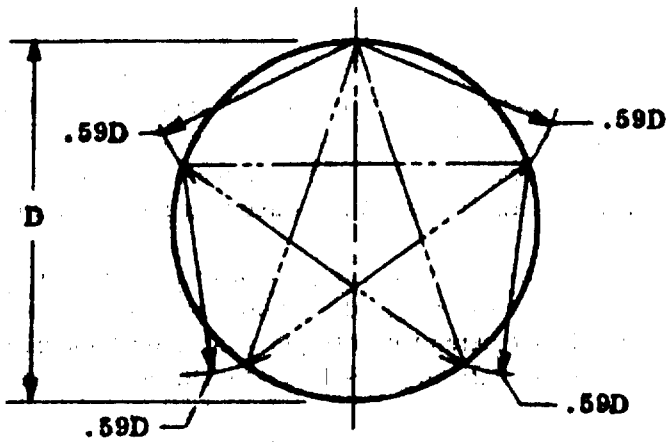

SUGGESTED CONSTRUCTION FOR TEMPLATES OR STENCILS

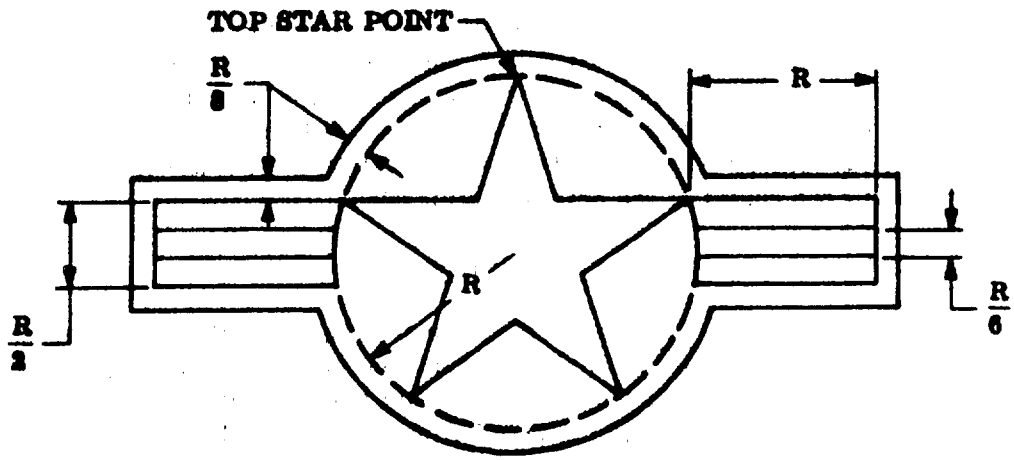

CONSTRUCTION DETAILS. THE RADIUS (R) OF THE BASIC BLUE CIRCLE DETERMINES ALL DIMENSIONS.

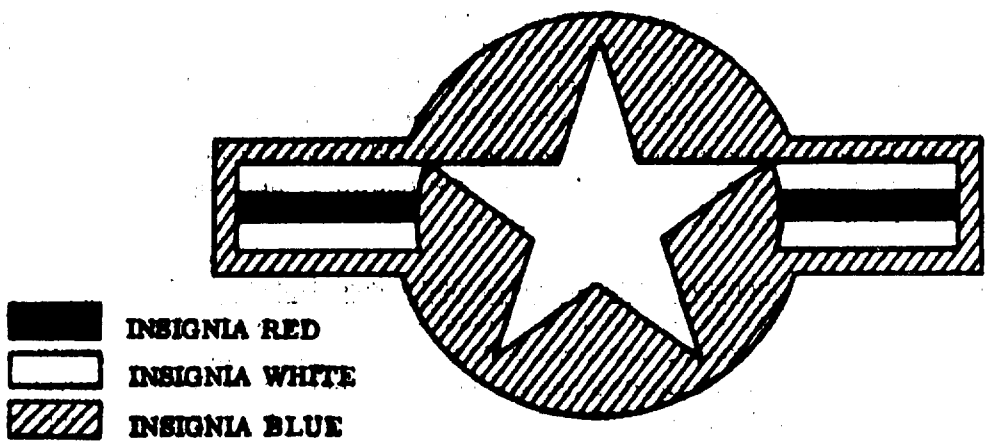

COLOR DIAGRAM

Figure 1. National Star Insignia.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:39Z
Check the source to verify that this is the current version before use.

3.2.1.2 Alinement. The national insignia shall be so applied on horizontal surfaces that in the normal flight attitude of the aircraft the top star point of the insignia points forward, and a line through that point and the star's center is parallel to the line of flight, except for cases as specified in 3.2.1.3.

3.2.1.3 Alinement on swept wings and wings of variable sweep. On aircraft having swept wings or wings of variable sweep, the national insignia shall be so placed that it will not extend into flaps, slats, or control surfaces. The national insignia on such wings shall be placed substantially as illustrated in Figure 2. The line through the top star point and its center shall be perpendicular to the line formed by the constant 50-percent chord line of the wing which passes through the center of the star.

* 3.2.2 Size. The insignia shall have a blue circle, excluding the border, with a maximum diameter of 40 inches and a minimum diameter of 10 inches. The standard sizes of the 10 to 40 inch diameters shall be in 5-inch increments. The blue circle diameter selected shall be the standard size which is closest to, but does not exceed, 50 percent of the distance between the leading edge of the wing and the aileron cutout at the point of application.

3.3 Fuselage or hull insignia.

3.3.1 Location. The national insignia shall be applied to each side of the fuselage or hull (except for helicopters and convertiplanes) approximately midway between the trailing edge of the wing and leading edge of the stabilizer, but in no case shall any part of the insignia be located closer than 35 inches to the trailing edge of the wing, except that the insignia may be moved forward or to the rear of the midpoint to avoid covering transparent material. When the fuselage or hull section between the trailing edge of the wing and the leading edge of the stabilizer is not large enough to accommodate the minimum size specified, or placing the insignia is impracticable for other reasons, such as excessive temperature conditions which would scorch the insignia, the insignia shall be placed on such other parts of the fuselage or hull as will permit its being readily seen from the side. Alternate locations, as permitted above, shall be such as to obtain suitable visibility, and shall be approved by the procuring activity. Fuselage or hull insignia may extend over doors and emergency exits, but shall not extend over windows or openings operable in flight which would change the insignia pattern.

3.3.2 Location on helicopters and convertiplanes. Four national insignia shall be applied to these aircraft in such manner as to be visibly identified from either side, from above, and from below. Alternate locations, because of design configurations, as permitted above, shall be such as to provide suitable identification and shall be approved by the procuring activity. Fuselage insignia may extend over doors and emergency exits, but shall not extend over windows or openings operable in flight. If space limitations and configuration permit, an additional insignia shall be applied to the nose of helicopters to provide more positive air-to-air identification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:39Z
Check the source to verify that this is the current version before use.

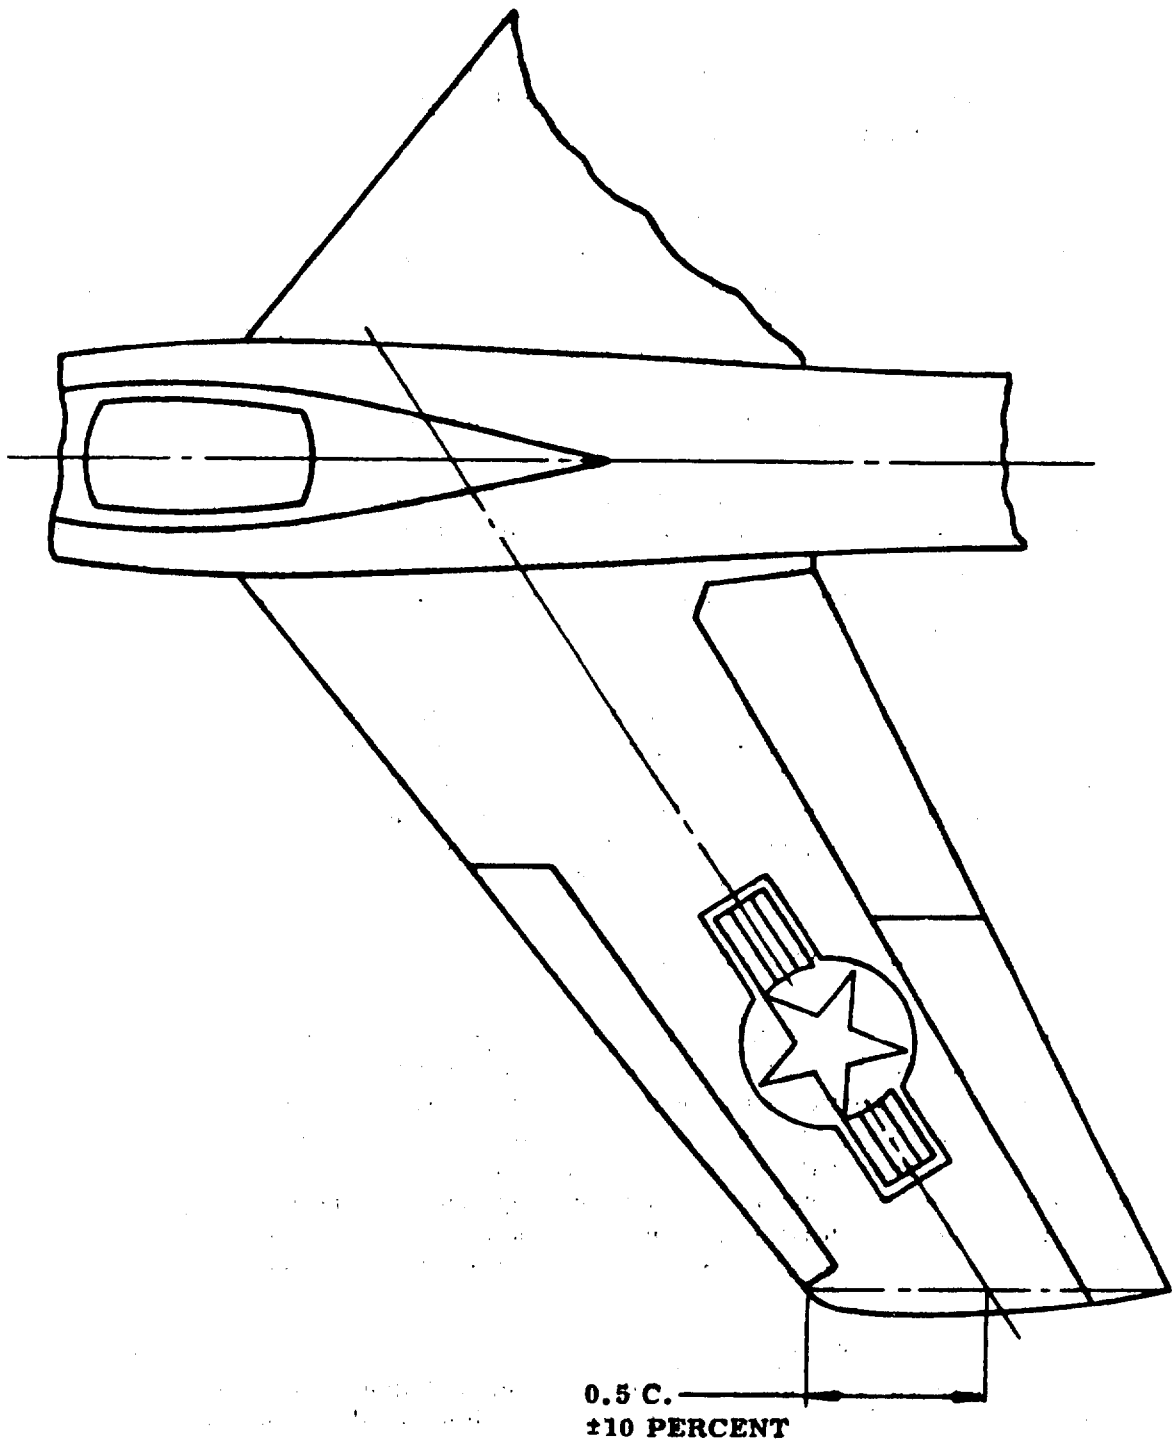


Figure 2. National Insignia on Swept Wings

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:39Z
Check the source to verify that this is the current version before use.

3.3.3 Alinement. The national insignia shall be so applied on vertical surfaces that in the normal horizontal flight attitude of the aircraft, the top star point of the insignia points upward, and a line through that point and the star's center is perpendicular to the line of flight.

* 3.3.4 Size. The insignia shall have a blue circle, excluding the border, with a maximum diameter of 40 inches and a minimum diameter of 15 inches. Standard sizes shall have blue circle diameters in multiples of 5 inches. The diameter selected shall be the standard size which comes nearest to, but does not exceed, 50 percent to the height of the projection of the fuselage or hull side at the point of application. If the above is impracticable for helicopters and convertiplanes, the most practicable standard diameter shall be selected.

* 3.4 Application. Application of the national insignia to exterior surfaces of Navy aircraft shall be in accordance with MIL-I-18464 and MIL-M-25047. Air Force applications shall be in accordance with MIL-M-25047 and Technical Manual T.O. 1-1-4, and Army applications shall be in accordance with Technical Manual TB 746-93-2.

* 3.5 Color. The standard colors of the national insignia are Insignia Red - Color No. 11136, Insignia White - Color No. 17875 and Insignia Blue - Color No. 15044. The colors shall conform and match the applicable color number specified in FED-STD-595. Corresponding semigloss or lusterless finishes of the above standard gloss colors of FED-STD-595 may be used to match adjacent surfaces only when specified by the procuring activity.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Workmanship inspection. The national insignia shall be subject to inspection for quality of workmanship and application. Any insignia which does not conform to the requirements of this specification shall be rejected. Insignias improperly applied shall be removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:39Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Not applicable

6. NOTES

* 6.1 Intended use. The national insignia is intended for use on military aircraft for purposes of identification from the maximum distance practicable.

* 6.2 Marginal indicia. The margins of this specification are marked to indicate where changes, deletions, or additions to the previous issue have been made. This is done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written, irrespective of the marginal notations and relationship to the last previous issue.

Military Custodians:
Army - AV
Navy - AS
Air Force - 11

Review Activities:
Army - IH, AV
Navy - AS
Air Force - 82, 84

User Activities:
Navy - MC, CG

Preparing Activity:
Navy - AS
(Project No. 8455 - 0141)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:39Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-I-6140B INSIGNIA, NATIONAL AIRCRAFT

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:39Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Philadelphia, PA 19112

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD 316



Engineering Specifications and Standards Department (Code X)
Naval Air Engineering Center
Philadelphia, PA 19112

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:39Z
Check the source to verify that this is the current version before use.