
MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, 120 AMPERES, 115/200 V AC, 400 HZ, 3PDT, CENTER OFF MAIN CONTACTS, 6PDT AUXILIARY CONTACTS, LATCHING, HERMETICALLY SEALED

This specification sheet is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the relays described herein shall consist of this specification and the latest issue of MIL-R-6106.

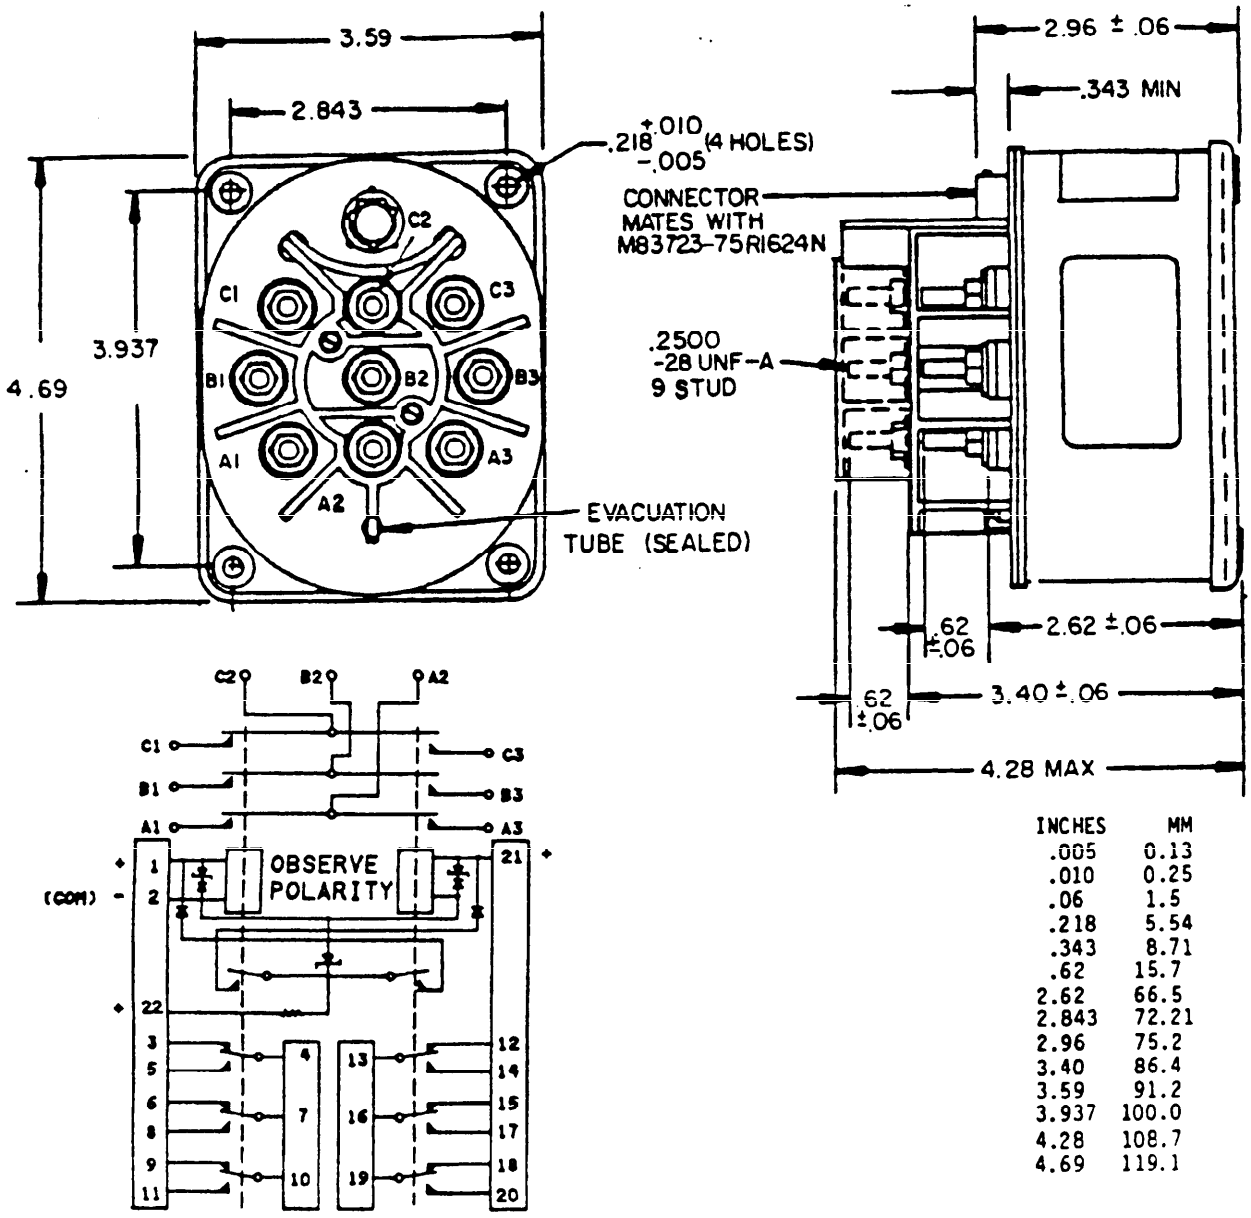

INCHES	MM
.005	0.13
.010	0.25
.06	1.5
.218	5.54
.343	8.71
.62	15.7
2.62	66.5
2.843	72.21
2.96	75.2
3.40	86.4
3.59	91.2
3.937	100.0
4.28	108.7
4.69	119.1

CIRCUIT DIAGRAM

FIGURE 1. Relay, outline drawing.

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:33Z
Check the source to verify that this is the current version before use.

AMSC N/A

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.030 (0.76 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.
4. Terminal numbers need not appear on the relay header provided there is affixed to the relay a suitable legible circuit diagram that identifies each terminal location specified.
5. The contactor shall be capable of turning off or transfer of an electrical load from one power source of 115/200 V ac 400 Hz, 3 phase power to an alternate source of the same type power. These powers will be connected to the normally open and closed contacts concurrently. Phase relation between the two power sources will be random.
6. Apply voltage to +1 and -2 only, closes A1, B1, and C1 from any position. Apply voltage to +21 and -2 only, closes A3, B3, and C3 from any position. Apply voltage to +22 and -2 only, returns to center off position from either position.
7. Mounting surface shall provide electrical ground.

FIGURE 1. Relay, outline drawing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Coil data:

Duty cycle: Continuous.

Operating voltage, maximum: 30 V dc.

Pull in voltage, maximum: 18 V dc.

Current rating: .267 ampere maximum at 25°C and 28 V dc (each coil).

Trip current, maximum: .320 ampere at 25°C and 28 V dc.

Operating time (at room temperature and 28 V dc) transfer time: 35 mi seconds maximum.

Coil transient voltage: ±50 volts.

Contact data:

Main contacts:

Configuration: 3PDT center off, latching.

Voltage: 115/200 V ac 400 Hz nominal.

Current rating:

Resistive: 120 ampere.

Inductive: 120 ampere.

Motor: 80 ampere.

Rupture: 1,000 ampere.

Overload: 800 ampere.

Auxiliary contacts:

Configuration: 6PDT.

Voltage: 28 V dc or 115 V ac 400 Hz nominal.

Current rating:

Resistive: 5 amperes.

Inductive: 5 amperes.

Lamp: 1 ampere.

Life:

Electrical: 50,000 cycles minimum.

Mechanical: 100,000 cycles minimum.

Weight: 2 pounds, 10 ounces maximum.

Environmental data:

Ambient temperature range: -55°C to +71°C.

Vibration, sine: .06 inch DA from 10 to 60 Hz, 10 G from 60 to 1,500

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:33Z
Check the source to verify that this is the current version before use.

Acceleration: 10 G.

Shock: 15 G maximum for 11 ±1 ms.

Altitude: 60,000 feet maximum.

PART NUMBER: M6106/46-001.

Custodian:
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5945-F562-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:33Z
Check the source to verify that this is the current version before use.