[INCH–POUND]
A–A–59832/6A
26 November 2014
SUPERSEDING
A–A–59832/6
6 March 2011


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

EXTRACTOR, ELECTRICAL CARD, METAL, NON–LOCKING, SINGLE–SIDED ACTUATION, NARROW PROFILE, STRAIGHT ACTUATING HANDLE FOR .032, .063, .094, .125, AND .156 INCH THICK CIRCUIT CARD ASSEMBLIES

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring extractors described herein shall consist of this document and the latest issue in effect of A–A–59832.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES herein).

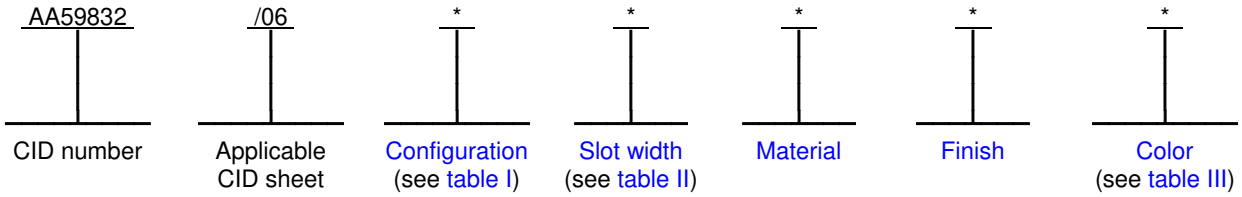

Example: AA59832/06S21AB is the PIN for a right side straight handle aluminum extractor designed for mounting on a circuit card assembly with a printed board thickness of .063 inch (1.60 mm) in width. The corrosion protection finish applied to the extractor is black hard anodize and the handle has a sensitive electronic device (SED) symbol.

SALIENT CHARACTERISTICS.

Performance. Extractors shall be capable of initiating the removal of a circuit card assembly from its installed position. The mechanical advantage of all extractor configurations on this CID specification sheet shall be a minimum of 4:1.

Interface and physical dimensions. The extractors supplied to this CID specification sheet shall be as specified herein and meet the general requirements specified in CID A–A–59832.

Configuration. The configuration of an extractor shall be as specified in table I and on figures 1 through 6.

TABLE I. Configurations.

Configuration	Applicable figures	Extractor description
K	1 and 2	Left hand with SED symbol on the straight handle
L	1	Left hand with straight handle
M	3	Left hand with bent leg and straight handle
N	3 and 4	Left hand with bent leg and SED symbol on the straight handle
P	4 and 5	Right hand with bent leg and SED symbol on the straight handle
Q	5	Right hand with bent leg and straight handle
R	6	Right hand with straight handle
S	6 and 2	Right hand with SED symbol on the straight handle

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Slot width. The available slot widths needed to accommodate various printed board thicknesses for the extractors covered by this CID specification sheet are specified in table II. The slot width designator shall be included in the PIN.

TABLE II. Slot width configurations and dimensions. 1/

Slot width designator	Slot width dimension "A" 2/ Inch (mm)	Accommodates printed board thickness Inch (mm)	Roll pin width Inch (mm)	Handle width dimension "B" Inch (mm)
1	.040 (1.02)	.032 (0.8)	.187 (4.75)	.25 (6.4)
2	.075 (2.03)	.063 (1.6)	.187 (4.75)	
3	.105 (2.79)	.094 (2.4)	.250 (6.35)	
4	.142 (3.56)	.125 (3.2)	.250 (6.35)	.29 (7.4)
5	.165 (4.19)	.156 (4.0)	.312 (7.94)	

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for general information only.
2/ Tolerance is +.005, –.005 inch (+0.127, –0.127 mm).

Material. The material used in the extractor body shall be as specified in A–A–59832. The applicable material type designators for this CID specification sheet are "1" (aluminum alloy 6061, temper T6), "2" (aluminum alloy 5052, temper H32), or "7" (Stainless steel, type 301, 302 or 304). The material designator shall be included in the PIN.

Material thickness. The aluminum thickness shall be .063 ±.003 inch (1.60 ±.077 mm). The stainless steel thickness shall be .060 ±.003 inch (1.52 ±0.077 mm).

Roll pin. A stainless steel roll pin is furnished with each extractor. The roll pin is .09375 inch (2.38 mm) diameter by the widths specified in table II.


Finish. The finish designator shall be as specified in A–A–59832. The finishes available for this CID specification sheet are as follows: "A" (anodize) or "L" (low resistance chemical film) for extractors fabricated of aluminum alloys and "P" (passivation treatment) extractors fabricated of stainless steel.

Color. The color designator shall be as specified in A–A–59832. The colors available for this CID specification sheet shall be "C" (clear) or "G" (gold) for low resistance chemical film and "C" (clear) for passivation treatment. The color of anodized extractors shall be specified in table III. The color designator shall be included in the PIN.

TABLE III. Colors of anodized extractors.

Designator	Color	Designator	Color
B	Black	R	Red
C	Clear	U	Blue
D	Green	V	Violet (purple)
E	Gray	W	Brown
F	Orange	Y	Yellow

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

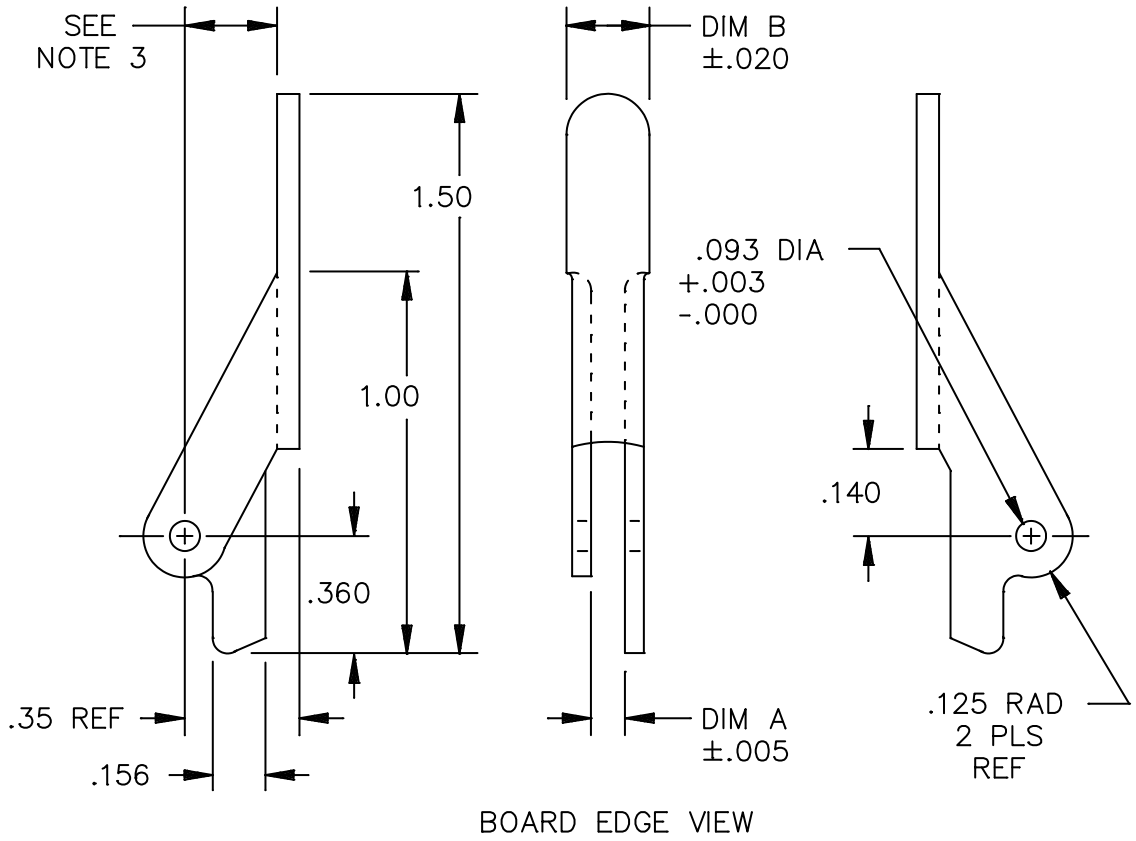


Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.125	3.18	.156	3.96	.360	9.14
.005	0.13	.093	2.36	.140	3.56	.18	4.57	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 5GB68 and CAGE 61081.

FIGURE 1. Configuration L dimensions (left hand).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

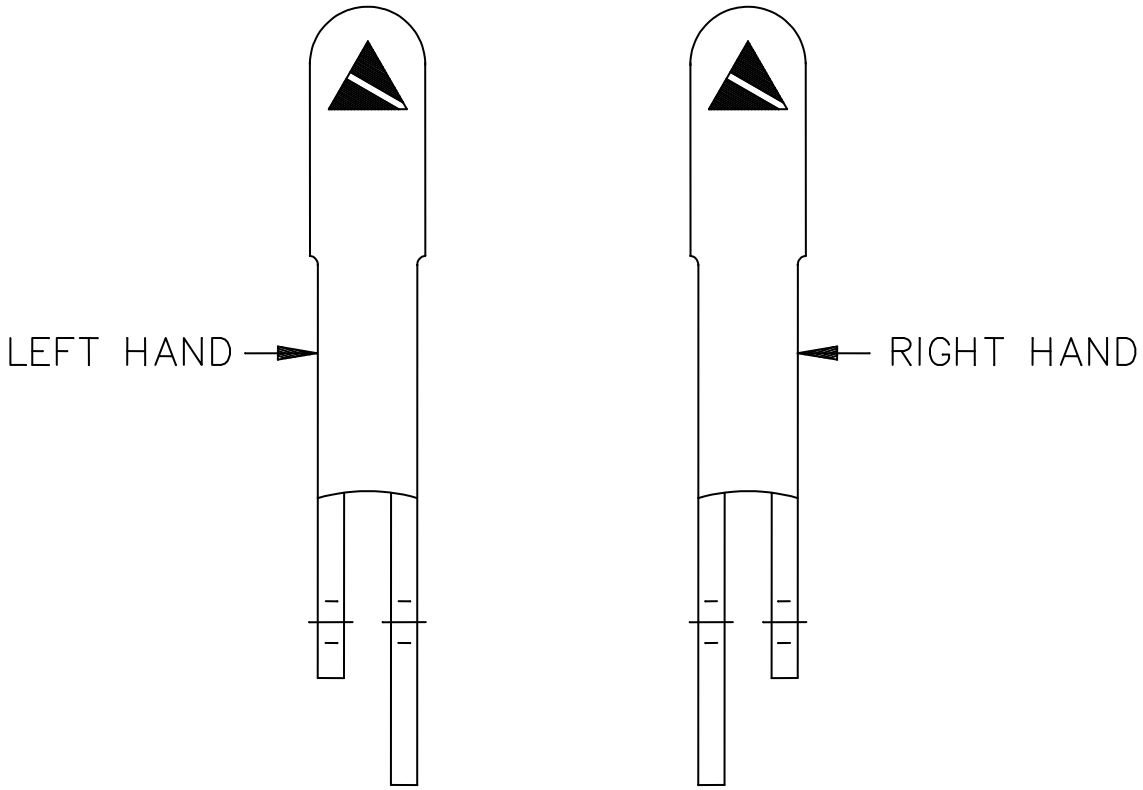

NOTES:
1. The SED symbol displayed on the extractor handles shall be in accordance with A–A–59832.
2. Unless otherwise specified, a monochromatic reproduction of the symbol displayed in A–A–59832 using any color that contrasts with the color of the extractor handle may be used.

FIGURE 2. Configurations K and S with SED symbol on extractor handle (board edge view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

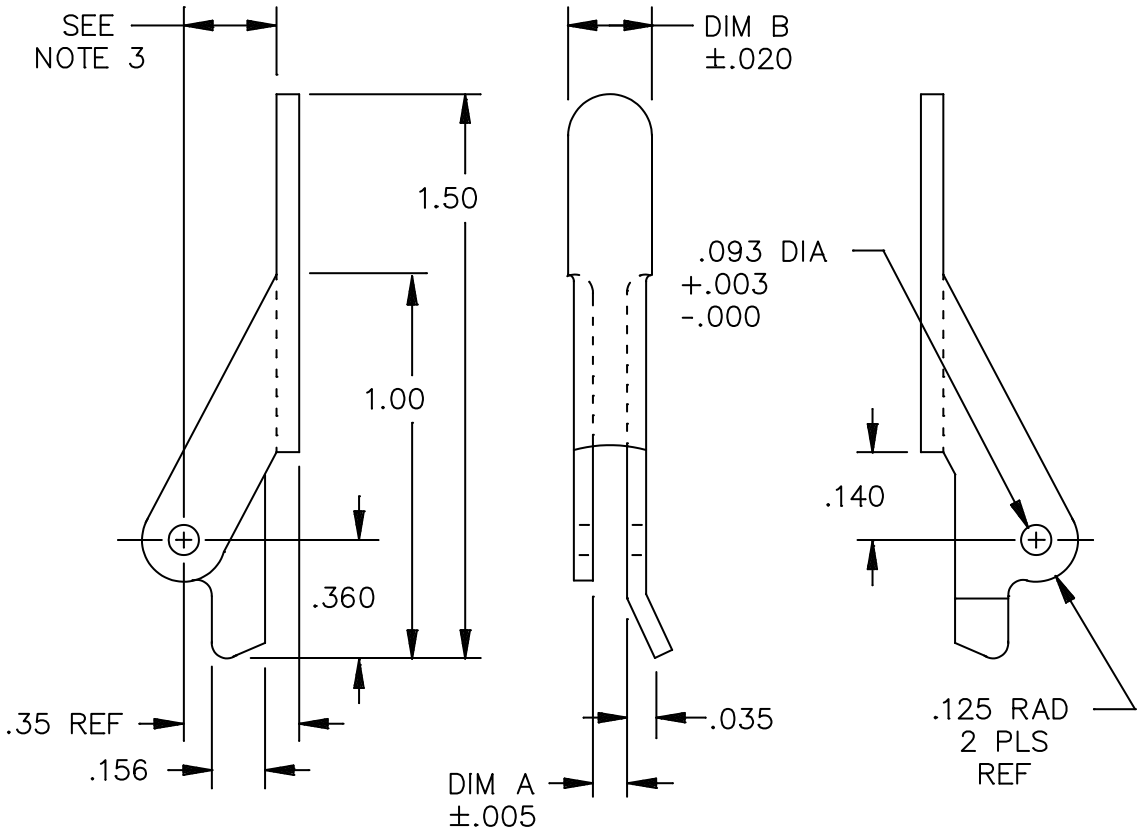


Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.140	3.56	.360	9.14
.005	0.13	.035	0.89	.125	3.18	.156	3.96	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 5GB68 and CAGE 61081.

FIGURE 3. Configuration M dimensions (left hand with bent leg).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

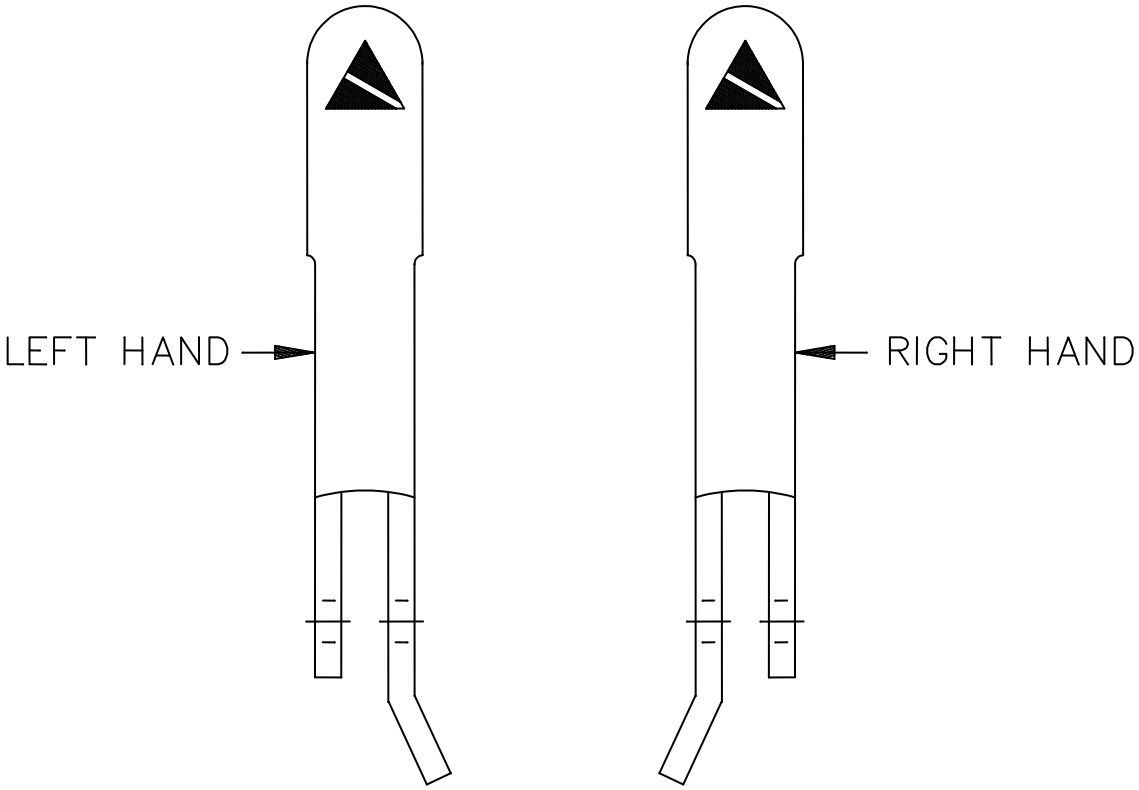

NOTES:
1. The SED symbol displayed on the extractor handles shall be in accordance with A–A–59832.
2. Unless otherwise specified, a monochromatic reproduction of the symbol displayed in A–A–59832 using any color that contrasts with the color of the extractor handle may be used.

FIGURE 4. Configurations N and P with SED symbol on extractor handle (board edge view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

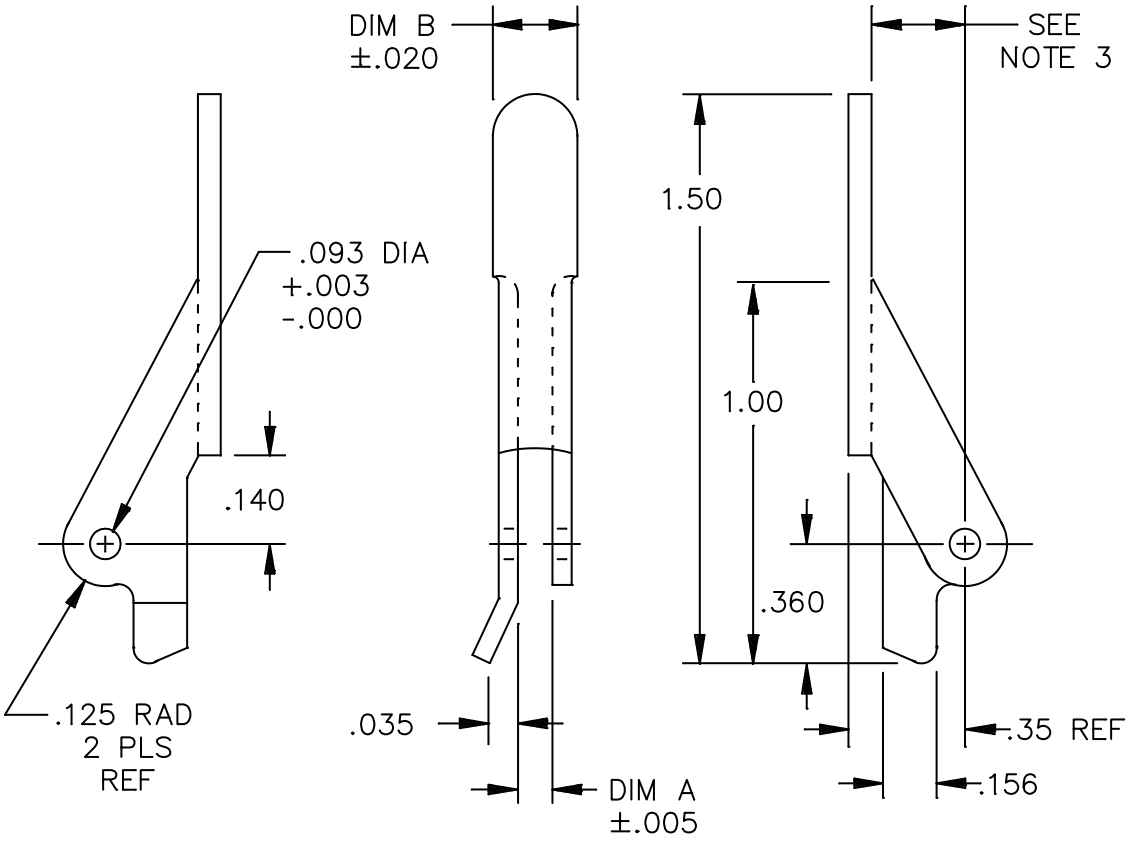


Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.140	3.56	.360	9.14
.005	0.13	.035	0.89	.125	3.18	.156	3.96	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:

1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 5GB68 and CAGE 61081.

FIGURE 5. Configuration Q dimensions (right hand with bent leg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

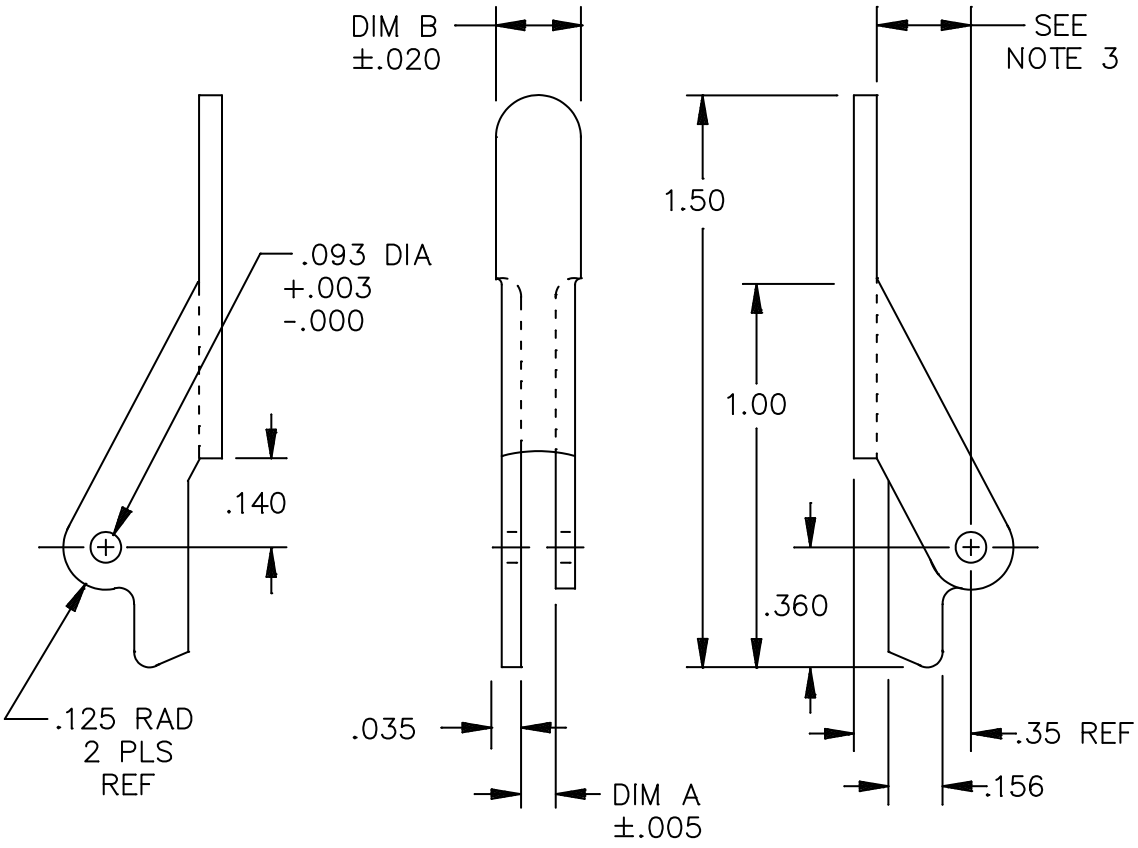

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.140	3.56	.360	9.14
.005	0.13	.035	0.89	.125	3.18	.156	3.96	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 5GB68 and CAGE 61081.

FIGURE 6. Configuration R dimensions (right hand).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

APPLICATION DATA.

Extractor orientation with circuit card assembly printed board. Figures 7 and 8 show the extractor mounted to a circuit card assembly and installed into a locking card guide from different views. Figure 7 depicts one strait on and two angled views of a right hand extractor fastened to the printed board of a circuit card assembly. Figure 8 depicts a right side view of a circuit card assembly with a right hand extractor fastened to the printed board.

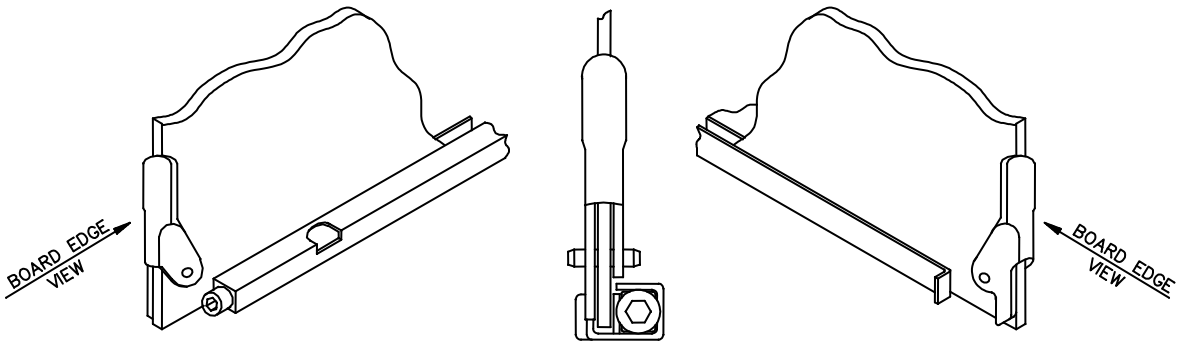


FIGURE 7. Extractor fastened to circuit card assembly (right hand extractor shown).


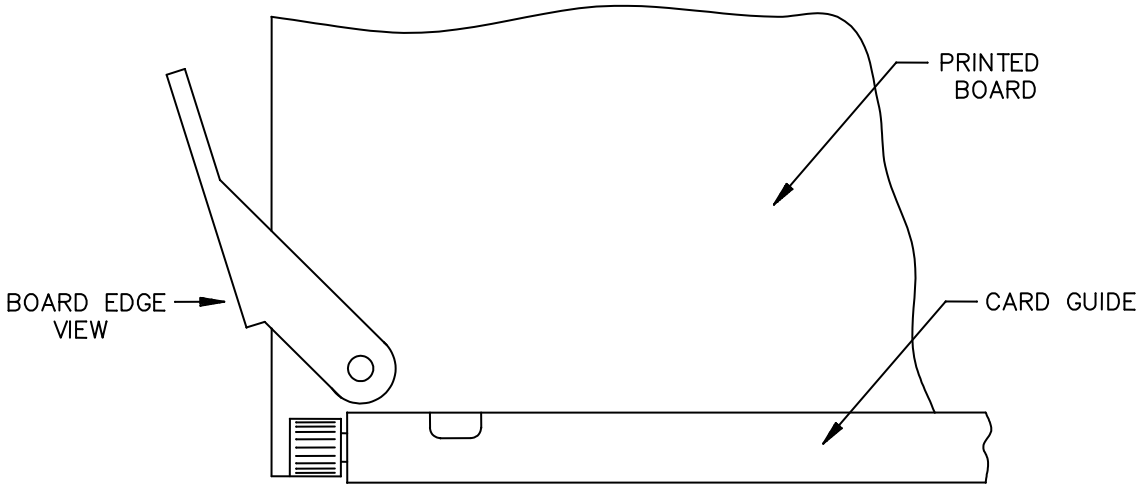


FIGURE 8. Circuit card assembly to card guide view (right hand extractor shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Circuit card positioning in relation to actuating surface. Two positions of a circuit card assembly edge to a locking card guide when seated in the connector are shown on figure 9. The circuit card assembly is ejected from its installed position by lever action of the extractor against the tab on a locking card guide (shown) or actuating surface of a card cage. The extractor will allow .030 inch (0.8 mm) over travel for tolerance take-up. Two extractors mounted on each circuit card assembly is recommended.

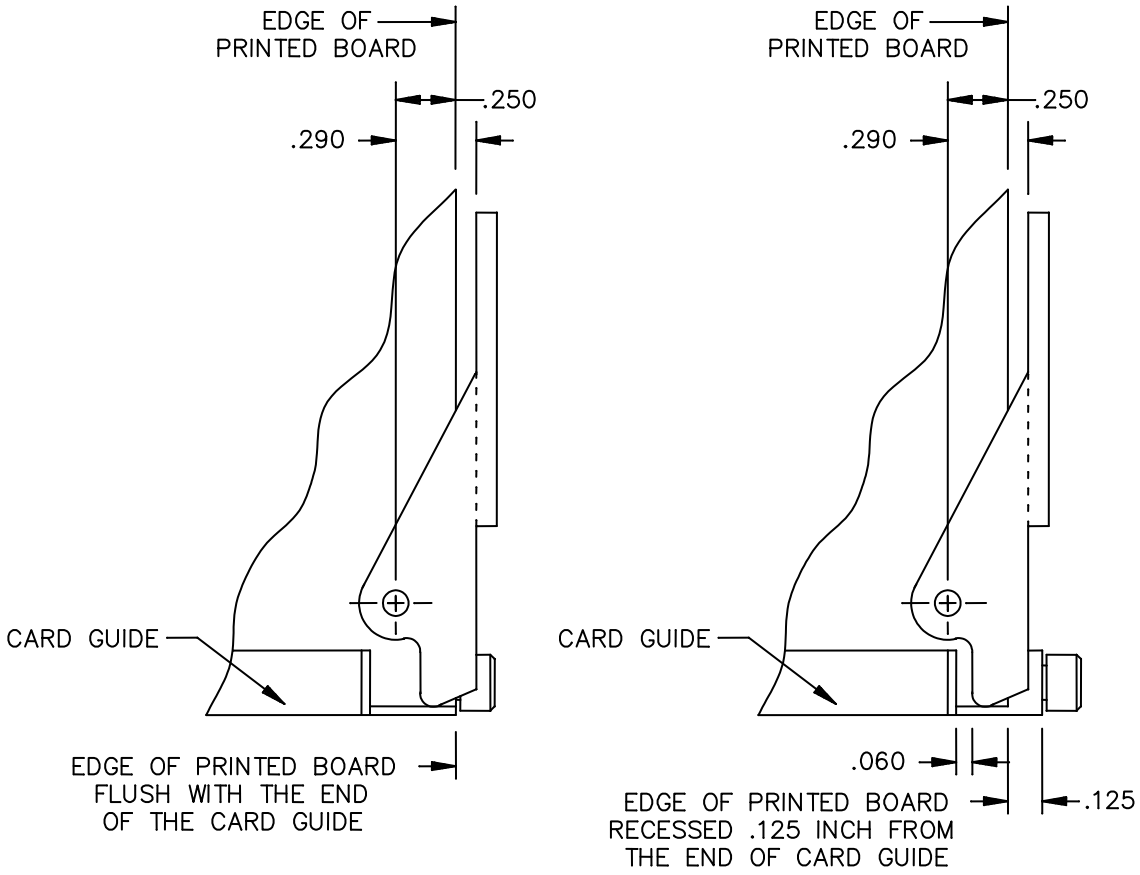


Inches	mm	Inches	mm	Inches	mm	Inches	mm
.060	1.52	.125	3.18	.250	6.35	.290	7.37

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 9. Circuit card assembly to card guide dimensions (right hand extractor shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Circuit card assembly printed board. The circuit card assembly should be designed so that electronic components on the printed board in the area around the extractor mounting hole have sufficient clearance for extractor rotation as shown on figure 10.

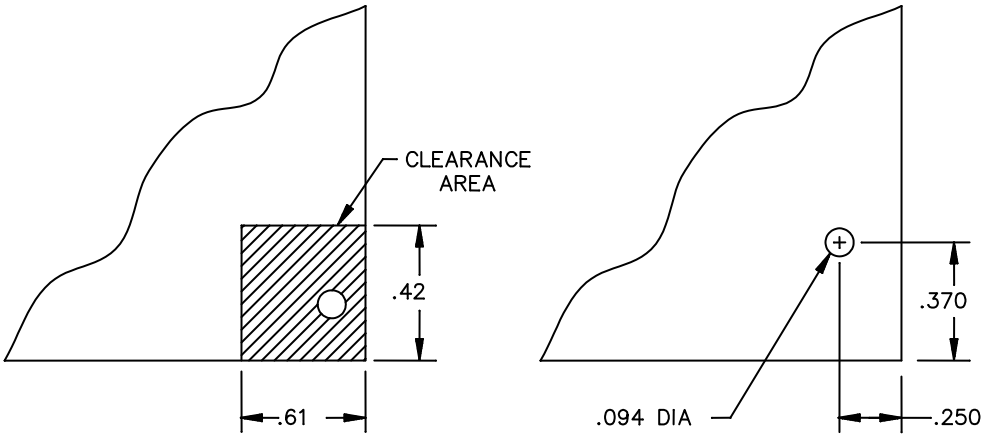

ELECTRONIC COMPONENT CLEARANCE ZONE REQUIRED TO ACCOMODATE MOUNTINT AND ROTATION OF EXTRACTOR(LEG SIDE SHOWN)

PRINTED BOARD MOUNTING DIMENSIONS

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.094	2.39	.250	6.35	.370	9.40	.42	10.67	.61	15.49

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 10. Printed board clearance zone and mounting hole dimensions.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–59832 – Extractor, Electrical Card, Metal, General Requirements For.

(Copies of these documents are available online at http://quicksearch.dla.mil.)

Ordering data. Ordering data is as specified in A–A–59832.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
5BG68	American Circuit Card Retainers, Inc. 2310 E. Orangethorpe Avenue Anaheim, CA 92806–1231	Telephone: (714) 738–6194 Facsimile: (714) 446–0119 E-mail: sales@accrmfg.com URL: www.accrmfg.com
61081	Schroff – A Division of Pentair Equipment and Electronics Protection 7328 Trade Street San Diego, CA 92121–3410	Telephone: (800) 854–7086 Facsimile: (858) 740–2430 E-mail: schroff.us@pentair.com URL: http://www.pentairprotect.com

Part number (P/N) supersession data. This CID specification sheet PINs supersedes the following manufacturer's P/Ns as shown in tables IV, V, and VI. This CID specification sheet PINs also supersedes those DESC Drawing 84191 PINs as shown in table VII. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/			
	CAGE 5BG68	CAGE 61081	CAGE	CAGE
K11AR	1119S–1LRAE	S71T6–1–L–1–E		
K21AR	1119S–2LRAE	S71T6–2–L–1–E		
K31AR	1119S–3LRAE	S71T6–3–L–1–E		
K41AR	1119S–4LRAE	S71T6–4–L–1–E		
K51AR	1119S–5LRAE	S71T6–5–L–1–E		
K11LG	1119S–1LCGE	S71T6–1–L–E		
K21LG	1119S–2LCGE	S71T6–2–L–E		
K31LG	1119S–3LCGE	S71T6–3–L–E		
K41LG	1119S–4LCGE	S71T6–4–L–E		
K51LG	1119S–5LCGE	S71T6–5–L–E		
L11AR	1119S–1LRA	S71T6–1–L–1		
L21AR	1119S–2LRA	S71T6–2–L–1		
L31AR	1119S–3LRA	S71T6–3–L–1		
L41AR	1119S–4LRA	S71T6–4–L–1		
L51AR	1119S–5LRA	S71T6–5–L–1		
L11LG	1119S–1LCG	S71T6–1–L		
L21LG	1119S–2LCG	S71T6–2–L		
L31LG	1119S–3LCG	S71T6–3–L		
L41LG	1119S–4LCG	S71T6–4–L		
L51LG	1119S–5LCG	S71T6–5–L		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors – Continued.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/			
	CAGE 5BG68	CAGE 61081	CAGE	CAGE
M11AR	1119S–1LRAD	S71T6–1–L–1–BL		
M21AR	1119S–2LRAD	S71T6–2–L–1–BL		
M31AR	1119S–3LRAD	S71T6–3–L–1–BL		
M41AR	1119S–4LRAD	S71T6–4–L–1–BL		
M51AR	1119S–5LRAD	S71T6–5–L–1–BL		
M11LG	1119S–1LCGD	S71T6–1–L–BL		
M21LG	1119S–2LCGD	S71T6–2–L–BL		
M31LG	1119S–3LCGD	S71T6–3–L–BL		
M41LG	1119S–4LCGD	S71T6–4–L–BL		
M51LG	1119S–5LCGD	S71T6–5–L–BL		
N11AR	1119S–1LRADE	S71T6–1–L–1–BL–E		
N21AR	1119S–2LRADE	S71T6–2–L–1–BL–E		
N31AR	1119S–3LRADE	S71T6–3–L–1–BL–E		
N41AR	1119S–4LRADE	S71T6–4–L–1–BL–E		
N51AR	1119S–5LRADE	S71T6–5–L–1–BL–E		
N11LG	1119S–1LCGDE	S71T6–1–L–BL–E		
N21LG	1119S–2LCGDE	S71T6–2–L–BL–E		
N31LG	1119S–3LCGDE	S71T6–3–L–BL–E		
N41LG	1119S–4LCGDE	S71T6–4–L–BL–E		
N51LG	1119S–5LCGDE	S71T6–5–L–BL–E		
P11AR	1119S–1RRADE	S71T6–1–R–1–BL–E		
P21AR	1119S–2RRADE	S71T6–2–R–1–BL–E		
P31AR	1119S–3RRADE	S71T6–3–R–1–BL–E		
P41AR	1119S–4RRADE	S71T6–4–R–1–BL–E		
P51AR	1119S–5RRADE	S71T6–5–R–1–BL–E		
P11LG	1119S–1RCGDE	S71T6–1–R–BL–E		
P21LG	1119S–2RCGDE	S71T6–2–R–BL–E		
P31LG	1119S–3RCGDE	S71T6–3–R–BL–E		
P41LG	1119S–4RCGDE	S71T6–4–R–BL–E		
P51LG	1119S–5RCGDE	S71T6–5–R–BL–E		
Q11AR	1119S–1RRAD	S71T6–1–R–1–BL		
Q21AR	1119S–2RRAD	S71T6–2–R–1–BL		
Q31AR	1119S–3RRAD	S71T6–3–R–1–BL		
Q41AR	1119S–4RRAD	S71T6–4–R–1–BL		
Q51AR	1119S–5RRAD	S71T6–5–R–1–BL		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors – Continued.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/			
	CAGE 5BG68	CAGE 61081	CAGE	CAGE
Q11LG	1119S–1RCGD	S71T6–1–R–BL		
Q21LG	1119S–2RCGD	S71T6–2–R–BL		
Q31LG	1119S–3RCGD	S71T6–3–R–BL		
Q41LG	1119S–4RCGD	S71T6–4–R–BL		
Q51LG	1119S–5RCGD	S71T6–5–R–BL		
R11AR	1119S–1RRA	S71T6–1–R–1		
R21AR	1119S–2RRA	S71T6–2–R–1		
R31AR	1119S–3RRA	S71T6–3–R–1		
R41AR	1119S–4RRA	S71T6–4–R–1		
R51AR	1119S–5RRA	S71T6–5–R–1		
R11LG	1119S–1RCG	S71T6–1–R		
R21LG	1119S–2RCG	S71T6–2–R		
R31LG	1119S–3RCG	S71T6–3–R		
R41LG	1119S–4RCG	S71T6–4–R		
R51LG	1119S–5RCG	S71T6–5–R		
S11AR	1119S–1RRAE	S71T6–1–R–1–E		
S21AR	1119S–2RRAE	S71T6–2–R–1–E		
S31AR	1119S–3RRAE	S71T6–3–R–1–E		
S41AR	1119S–4RRAE	S71T6–4–R–1–E		
S51AR	1119S–5RRAE	S71T6–5–R–1–E		
S11LG	1119S–1RCGE	S71T6–1–R–E		
S21LG	1119S–2RCGE	S71T6–2–R–E		
S31LG	1119S–3RCGE	S71T6–3–R–E		
S41LG	1119S–4RCGE	S71T6–4–R–E		
S51LG	1119S–5RCGE	S71T6–5–R–E		

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59832.

2/ The PINs listed are for gold low resistance chemical film (CID finish and color codes LG) or red anodize (CID finish and color codes AR). Low resistance chemical film is also available in clear (CID finish and color code LC). See table III for the finish codes for the other 9 anodize colors available.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/			
	CAGE 5BG68	CAGE 61081	CAGE	CAGE
K12AB	1109S–1LBAE	S71–1–L–5–E		
K22AB	1109S–2LBAE	S71–2–L–5–E		
K32AB	1109S–3LBAE	S71–3–L–5–E		
K42AB	1109S–4LBAE	S71–4–L–5–E		
K52AB	1109S–5LBAE	S71–5–L–5–E		
K12LC	1109S–1LCCE	S71–1–L–CC–E		
K22LC	1109S–2LCCE	S71–2–L–CC–E		
K32LC	1109S–3LCCE	S71–3–L–CC–E		
K42LC	1109S–4LCCE	S71–4–L–CC–E		
K52LC	1109S–5LCCE	S71–5–L–CC–E		
L12AB	1109S–1LBA	S71–1–L–5		
L22AB	1109S–2LBA	S71–2–L–5		
L32AB	1109S–3LBA	S71–3–L–5		
L42AB	1109S–4LBA	S71–4–L–5		
L52AB	1109S–5LBA	S71–5–L–5		
L12LC	1109S–1LCC	S71–1–L–CC		
L22LC	1109S–2LCC	S71–2–L–CC		
L32LC	1109S–3LCC	S71–3–L–CC		
L42LC	1109S–4LCC	S71–4–L–CC		
L52LC	1109S–5LCC	S71–5–L–CC		
M12AB	1109S–1LBAD	S71–1–L–5–BL		
M22AB	1109S–2LBAD	S71–2–L–5–BL		
M32AB	1109S–3LBAD	S71–3–L–5–BL		
M42AB	1109S–4LBAD	S71–4–L–5–BL		
M52AB	1109S–5LBAD	S71–5–L–5–BL		
M12LC	1109S–1LCCD	S71–1–L–CC–BL		
M22LC	1109S–2LCCD	S71–2–L–CC–BL		
M32LC	1109S–3LCCD	S71–3–L–CC–BL		
M42LC	1109S–4LCCD	S71–4–L–CC–BL		
M52LC	1109S–5LCCD	S71–5–L–CC–BL		
N12AB	1109S–1LBADE	S71–1–L–5–BL–E		
N22AB	1109S–2LBADE	S71–2–L–5–BL–E		
N32AB	1109S–3LBADE	S71–3–L–5–BL–E		
N42AB	1109S–4LBADE	S71–4–L–5–BL–E		
N52AB	1109S–5LBADE	S71–5–L–5–BL–E		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors – Continued.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/			
	CAGE 5BG68	CAGE 61081	CAGE	CAGE
N12LC	1109S–1LCCDE	S71–1–L–CC–BL–E		
N22LC	1109S–2LCCDE	S71–2–L–CC–BL–E		
N32LC	1109S–3LCCDE	S71–3–L–CC–BL–E		
N42LC	1109S–4LCCDE	S71–4–L–CC–BL–E		
N52LC	1109S–5LCCDE	S71–5–L–CC–BL–E		
P12AB	1109S–1RBADE	S71–1–R–5–BL–E		
P22AB	1109S–2RBADE	S71–2–R–5–BL–E		
P32AB	1109S–3RBADE	S71–3–R–5–BL–E		
P42AB	1109S–4RBADE	S71–4–R–5–BL–E		
P52AB	1109S–5RBADE	S71–5–R–5–BL–E		
P12LC	1109S–1RCCDE	S71–1–R–CC–BL–E		
P22LC	1109S–2RCCDE	S71–2–R–CC–BL–E		
P32LC	1109S–3RCCDE	S71–3–R–CC–BL–E		
P42LC	1109S–4RCCDE	S71–4–R–CC–BL–E		
P52LC	1109S–5RCCDE	S71–5–R–CC–BL–E		
Q12AB	1109S–1RBAD	S71–1–R–5–BL		
Q22AB	1109S–2RBAD	S71–2–R–5–BL		
Q32AB	1109S–3RBAD	S71–3–R–5–BL		
Q42AB	1109S–4RBAD	S71–4–R–5–BL		
Q52AB	1109S–5RBAD	S71–5–R–5–BL		
Q12LC	1109S–1RCCD	S71–1–R–CC–BL		
Q22LC	1109S–2RCCD	S71–2–R–CC–BL		
Q32LC	1109S–3RCCD	S71–3–R–CC–BL		
Q42LC	1109S–4RCCD	S71–4–R–CC–BL		
Q52LC	1109S–5RCCD	S71–5–R–CC–BL		
R12AB	1109S–1RBA	S71–1–R–5		
R22AB	1109S–2RBA	S71–2–R–5		
R32AB	1109S–3RBA	S71–3–R–5		
R42AB	1109S–4RBA	S71–4–R–5		
R52AB	1109S–5RBA	S71–5–R–5		
R12LC	1109S–1RCC	S71–1–R–CC		
R22LC	1109S–2RCC	S71–2–R–CC		
R32LC	1109S–3RCC	S71–3–R–CC		
R42LC	1109S–4RCC	S71–4–R–CC		
R52LC	1109S–5RCC	S71–5–R–CC		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors – Continued.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/			
	CAGE 5BG68	CAGE 61081	CAGE	CAGE
S12AB	1109S–1RBAE	S71–1–R–5–E		
S22AB	1109S–2RBAE	S71–2–R–5–E		
S32AB	1109S–3RBAE	S71–3–R–5–E		
S42AB	1109S–4RBAE	S71–4–R–5–E		
S52AB	1109S–5RBAE	S71–5–R–5–E		
S12LC	1109S–1RCCE	S71–1–R–CC–E		
S22LC	1109S–2RCCE	S71–2–R–CC–E		
S32LC	1109S–3RCCE	S71–3–R–CC–E		
S42LC	1109S–4RCCE	S71–4–R–CC–E		
S52LC	1109S–5RCCE	S71–5–R–CC–E		

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59832.

2/ The PINs listed are for clear low resistance chemical film (CID finish and color codes LC) or black anodize (CID finish and color codes AB). Low resistance chemical film is also available in gold (CID finish and color codes LG). See table III for the finish codes for the other 9 anodize colors available.

TABLE VI. Commercial part number supersession data for stainless steel extractors.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/			
	CAGE 5BG68	CAGE 61081	CAGE	CAGE
K27PC	1129S–2LE	S71CR–2–L		
K37PC	1129S–3LE	S71CR–3–L		
K47PC	1129S–4LE			
K57PC	1129S–5LE			
L27PC	1129S–2L	S71CR–2–L		
L37PC	1129S–3L	S71CR–3–L		
L47PC	1129S–4L			
L57PC	1129S–5L			
M27PC	1129S–2LD	S71CR–2–L–BL		
M37PC	1129S–3LD	S71CR–3–L–BL		
M47PC	1129S–4LD			
M57PC	1129S–5LD			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VI. Commercial part number supersession data for stainless steel extractors – Continued.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/			
	CAGE 5BG68	CAGE 61081	CAGE	CAGE
N27PC	1129S–2LDE	S71CR–2–L–BL–E		
N37PC	1129S–3LDE	S71CR–3–L–BL–E		
N47PC	1129S–4LDE			
N57PC	1129S–5LDE			
P27PC	1129S–2RDE	S71CR–2–R–BL–E		
P37PC	1129S–3RDE	S71CR–3–R–BL–E		
P47PC	1129S–4RDE			
P57PC	1129S–5RDE			
Q27PC	1129S–2RD	S71CR–2–R–BL		
Q37PC	1129S–3RD	S71CR–3–R–BL		
Q47PC	1129S–4RD			
Q57PC	1129S–5RD			
R27PC	1129S–2R	S71CR–2–R		
R37PC	1129S–3R	S71CR–3–R		
R47PC	1129S–4R			
R57PC	1129S–5R			
S27PC	1129S–2RE	S71CR–2–R–E		
S37PC	1129S–3RE	S71CR–3–R–E		
S47PC	1129S–4RE			
S57PC	1129S–5RE			

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59832.

2/ The PINs listed are for passivation treatment (CID finish and color codes PC).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191–25ET	AA59832/06K11LG	84191–26ET	AA59832/06S11LG
84191–25EA	AA59832/06K11LG	84191–26EA	AA59832/06S11LG
84191–25PS	AA59832/06L17PC	84191–26PS	AA59832/06R17PC
84191–25CT	AA59832/06L11LG	84191–26CT	AA59832/06R11LG
84191–25CA	AA59832/06L12LG	84191–26CA	AA59832/06R12LG
84191–25*T 1/	AA59832/06L11A# 2/	84191–26*T 1/	AA59832/06R11A# 2/
84191–25*A 1/	AA59832/06L12A# 2/	84191–26*A 1/	AA59832/06R12A# 2/
84191–25PSBL	AA59832/06M17PC	84191–26PSBL	AA59832/06Q17PC
84191–25CTBL	AA59832/06M11LG	84191–26CTBL	AA59832/06Q11LG
84191–25CABL	AA59832/06M12LG	84191–26CABL	AA59832/06Q12LG
84191–25*TBL 1/	AA59832/06M11A# 2/	84191–26*TBL 1/	AA59832/06Q11A# 2/
84191–25*ABL 1/	AA59832/06M12A# 2/	84191–26*ABL 1/	AA59832/06Q12A# 2/
84191–25ETBL	AA59832/06N11LG	84191–26ETBL	AA59832/06P11LG
84191–25EABL	AA59832/06N11LG	84191–26EABL	AA59832/06P11LG
84191–27ET	AA59832/06K21LG	84191–28ET	AA59832/06S21LG
84191–27EA	AA59832/06K21LG	84191–28EA	AA59832/06S21LG
84191–27PS	AA59832/06L27PC	84191–28PS	AA59832/06R27PC
84191–27CT	AA59832/06L21LG	84191–28CT	AA59832/06R21LG
84191–27CA	AA59832/06L22LG	84191–28CA	AA59832/06R22LG
84191–27*T 1/	AA59832/06L21A# 2/	84191–28*T 1/	AA59832/06R21A# 2/
84191–27*A 1/	AA59832/06L22A# 2/	84191–28*A 1/	AA59832/06R22A# 2/
84191–27PSBL	AA59832/06M27PC	84191–28PSBL	AA59832/06Q27PC
84191–27CTBL	AA59832/06M21LG	84191–28CTBL	AA59832/06Q21LG
84191–27CABL	AA59832/06M22LG	84191–28CABL	AA59832/06Q22LG
84191–27*TBL 1/	AA59832/06M21A# 2/	84191–28*TBL 1/	AA59832/06Q21A# 2/
84191–27*ABL 1/	AA59832/06M22A# 2/	84191–28*ABL 1/	AA59832/06Q22A# 2/
84191–27ETBL	AA59832/06N21LG	84191–28ETBL	AA59832/06P21LG
84191–27EABL	AA59832/06N21LG	84191–28EABL	AA59832/06P21LG

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information – Continued.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191–29ET	AA59832/06K31LG	84191–30ET	AA59832/06S31LG
84191–29EA	AA59832/06K31LG	84191–30EA	AA59832/06S31LG
84191–29PS	AA59832/06L37PC	84191–30PS	AA59832/06R37PC
84191–29CT	AA59832/06L31LG	84191–30CT	AA59832/06R31LG
84191–29CA	AA59832/06L32LG	84191–30CA	AA59832/06R32LG
84191–29*T 1/	AA59832/06L31A# 2/	84191–30*T 1/	AA59832/06R31A# 2/
84191–29*A 1/	AA59832/06L32A# 2/	84191–30*A 1/	AA59832/06R32A# 2/
84191–29PSBL	AA59832/06M37PC	84191–30PSBL	AA59832/06Q37PC
84191–29CTBL	AA59832/06M31LG	84191–30CTBL	AA59832/06Q31LG
84191–29CABL	AA59832/06M32LG	84191–30CABL	AA59832/06Q32LG
84191–29*TBL 1/	AA59832/06M31A# 2/	84191–30*TBL 1/	AA59832/06Q31A# 2/
84191–29*ABL 1/	AA59832/06M32A# 2/	84191–30*ABL 1/	AA59832/06Q32A# 2/
84191–29ETBL	AA59832/06N31LG	84191–30ETBL	AA59832/06P31LG
84191–29EABL	AA59832/06N31LG	84191–30EABL	AA59832/06P31LG
84191–31ET	AA59832/06K41LG	84191–32ET	AA59832/06S41LG
84191–31EA	AA59832/06K41LG	84191–32EA	AA59832/06S41LG
84191–31PS	AA59832/06L47PC	84191–32PS	AA59832/06R47PC
84191–31CT	AA59832/06L41LG	84191–32CT	AA59832/06R41LG
84191–31CA	AA59832/06L42LG	84191–32CA	AA59832/06R42LG
84191–31*T 1/	AA59832/06L41A# 2/	84191–32*T 1/	AA59832/06R41A# 2/
84191–31*A 1/	AA59832/06L42A# 2/	84191–32*A 1/	AA59832/06R42A# 2/
84191–31PSBL	AA59832/06M47PC	84191–32PSBL	AA59832/06Q47PC
84191–31CTBL	AA59832/06M41LG	84191–32CTBL	AA59832/06Q41LG
84191–31CABL	AA59832/06M42LG	84191–32CABL	AA59832/06Q42LG
84191–31*TBL 1/	AA59832/06M41A# 2/	84191–32*TBL 1/	AA59832/06Q41A# 2/
84191–31*ABL 1/	AA59832/06M42A# 2/	84191–32*ABL 1/	AA59832/06Q42A# 2/
84191–31ETBL	AA59832/06N41LG	84191–32ETBL	AA59832/06P41LG
84191–31EABL	AA59832/06N41LG	84191–32EABL	AA59832/06P41LG

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information – Continued.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191–39ET	AA59832/06K51LG	84191–40ET	AA59832/06S51LG
84191–39EA	AA59832/06K51LG	84191–40EA	AA59832/06S51LG
84191–39PS	AA59832/06L57PC	84191–40PS	AA59832/06R57PC
84191–39CT	AA59832/06L51LG	84191–40CT	AA59832/06R51LG
84191–39CA	AA59832/06L52LG	84191–40CA	AA59832/06R52LG
84191–39*T 1/	AA59832/06L51A# 2/	84191–40*T 1/	AA59832/06R51A# 2/
84191–39*A 1/	AA59832/06L52A# 2/	84191–40*A 1/	AA59832/06R52A# 2/
84191–39PSBL	AA59832/06M57PC	84191–40PSBL	AA59832/06Q57PC
84191–39CTBL	AA59832/06M51LG	84191–40CTBL	AA59832/06Q51LG
84191–39CABL	AA59832/06M52LG	84191–40CABL	AA59832/06Q52LG
84191–39*TBL 1/	AA59832/06M51A# 2/	84191–40*TBL 1/	AA59832/06Q51A# 2/
84191–39*ABL 1/	AA59832/06M52A# 2/	84191–40*ABL 1/	AA59832/06Q52A# 2/
84191–39ETBL	AA59832/06N51LG	84191–40ETBL	AA59832/06P51LG
84191–39EABL	AA59832/06N51LG	84191–40EABL	AA59832/06P51LG

1/ The asterisk "*" denotes the anodize aluminum finish colors for DESC Drawing 84191.
2/ The pound sign "#" denotes the anodize aluminum finish colors of table II herein.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review Activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FAS

Preparing Activity:
DLA – CC

Project: 5998–2014–014

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.