[INCH–POUND]
A–A–59832/7
17 November 2014


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

EXTRACTOR, ELECTRICAL CARD, METAL, NON–LOCKING, SINGLE–SIDED ACTUATION, NARROW PROFILE, ANGLED ACTUATING HANDLE, WITH RELEASE TAB, FOR .032, .063, .094, .125, AND .156 INCH THICK CIRCUIT CARD ASSEMBLIES

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring extractors described herein shall consist of this document and the latest issue in effect of A–A–59832.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES herein).

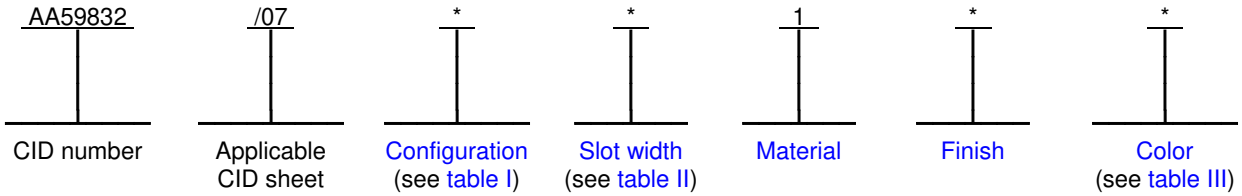

Example: AA59832/07K42LC is the PIN for a left handed, angle handle with release tab, aluminum (alloy 5052, temper H32) extractor designed for mounting on a circuit card assembly with a printed board thickness of .125 inch (3.20 mm) in width. The corrosion protection finish applied to the extractor is clear chemical film.

SALIENT CHARACTERISTICS.

Performance. Extractors shall be capable of initiating the removal of a circuit card assembly from its installed position. The mechanical advantage of all extractor configurations on this CID specification sheet is approximately 4.2:1.

Interface and physical dimensions. The extractors supplied to this CID specification sheet shall be as specified herein and meet the general requirements specified in CID A–A–59832.

Configuration. The configuration of an extractor shall be as specified in table I and on figures 1 through 6.

TABLE I. Configurations.

Configuration	Applicable figures	Extractor description
K	1 and 2	Left hand with SED symbol on the angled handle
L	1	Left hand with angled handle
M	3	Left hand with bent leg and angled handle
N	3 and 4	Left hand with bent leg and SED symbol on the angled handle
P	4 and 5	Right hand with bent leg and SED symbol on the angled handle
Q	5	Right hand with bent leg and angled handle
R	6	Right hand with angled handle
S	6 and 2	Right hand with SED symbol on the angled handle

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Slot width. The available slot widths needed to accommodate various printed board thicknesses for the extractors covered by this CID specification sheet are specified in table II. The slot width designator shall be included in the PIN.

TABLE II. Slot width configurations and dimensions. 1/

Slot width designator	Slot width dimension "A" 2/ Inch (mm)	Accommodates printed board thickness Inch (mm)	Roll pin width Inch (mm)	Handle width dimension "B" 2/ Inch (mm)
1	.040 (1.02)	.032 (0.8)	.187 (4.75)	.25 (6.4)
2	.075 (2.03)	.063 (1.6)	.187 (4.75)	
3	.105 (2.79)	.094 (2.4)	.250 (6.35)	
4	.142 (3.56)	.125 (3.2)	.250 (6.35)	.29 (7.4)
5	.165 (4.19)	.156 (4.0)	.312 (7.94)	

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for general information only.
2/ Tolerance shall be as specified on the applicable figure (see figures 1, 3, 5, and 6).

Material. The material used in the extractor body shall be as specified in A–A–59832. The applicable material type designators for this CID specification sheet are "1" (aluminum alloy 6061, temper T6), "2" (aluminum alloy 5052, temper H32), or "7" (Stainless steel, type 301, 302 or 304). The material designator shall be included in the PIN.

Material thickness. The aluminum thickness shall be .063 ±.003 inch (1.60 ±0.076 mm). The stainless steel thickness shall be .060 ±.002 inch (1.58 ±0.05 mm).

Roll pin. A stainless steel roll pin is furnished with each extractor. The roll pin is .09375 inch (2.38 mm) diameter by the lengths specified in table II.


Finish. The finish designator shall be as specified in A–A–59832. The finishes available for this CID specification sheet are as follows: "A" (anodize) or "L" (low resistance chemical film) for extractors fabricated of aluminum alloys and "P" (passivation treatment) extractors fabricated of stainless steel.

Color. The color designator shall be as specified in A–A–59832. The colors available for this CID specification sheet shall be "C" (clear) or "G" (gold) for low resistance chemical film and "C" (clear) for passivation treatment. The color of anodized extractors shall be specified in table III. The color designator shall be included in the PIN.

TABLE III. Colors of anodized extractors.

Designator	Color	Designator	Color
B	Black	R	Red
C	Clear	U	Blue
D	Green	V	Violet (purple)
E	Gray	W	Brown
F	Orange	Y	Yellow

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

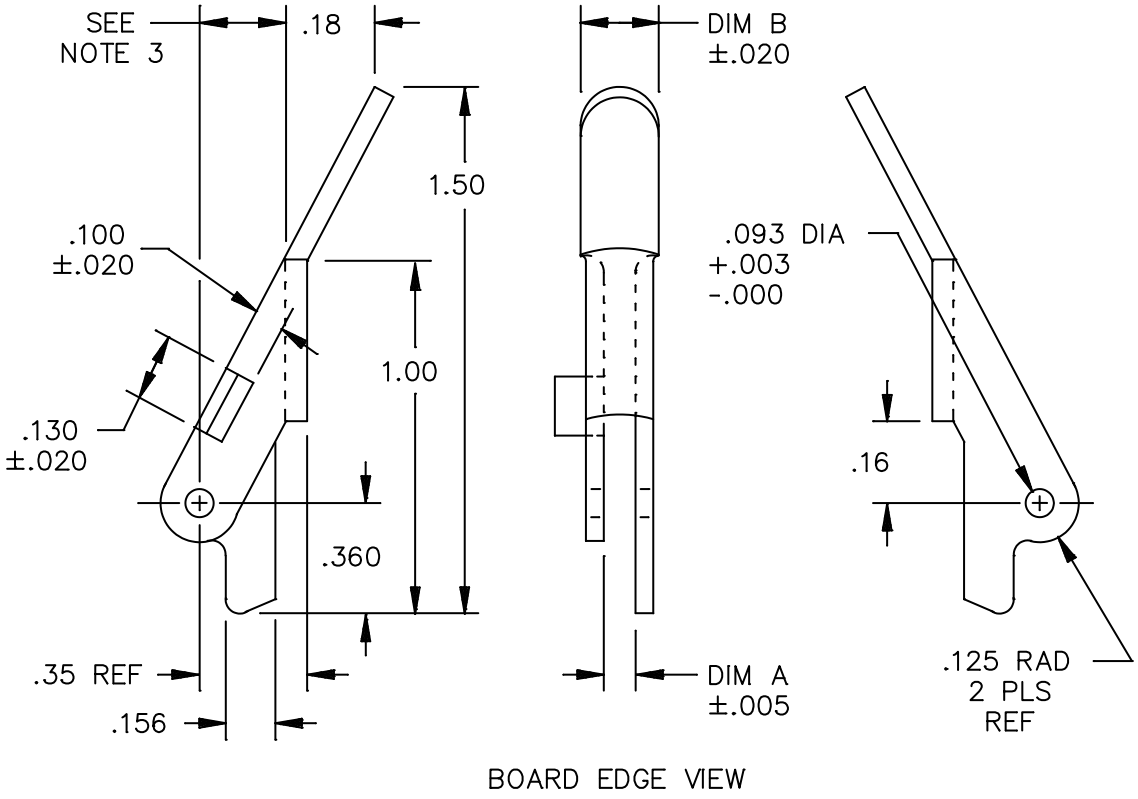


Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.125	3.18	.16	4.06	.360	9.14
.005	0.13	.093	2.36	.156	3.96	.18	4.57	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:

1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 61081 and CAGE 5GB68.

FIGURE 1. Configuration L dimensions (left hand).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

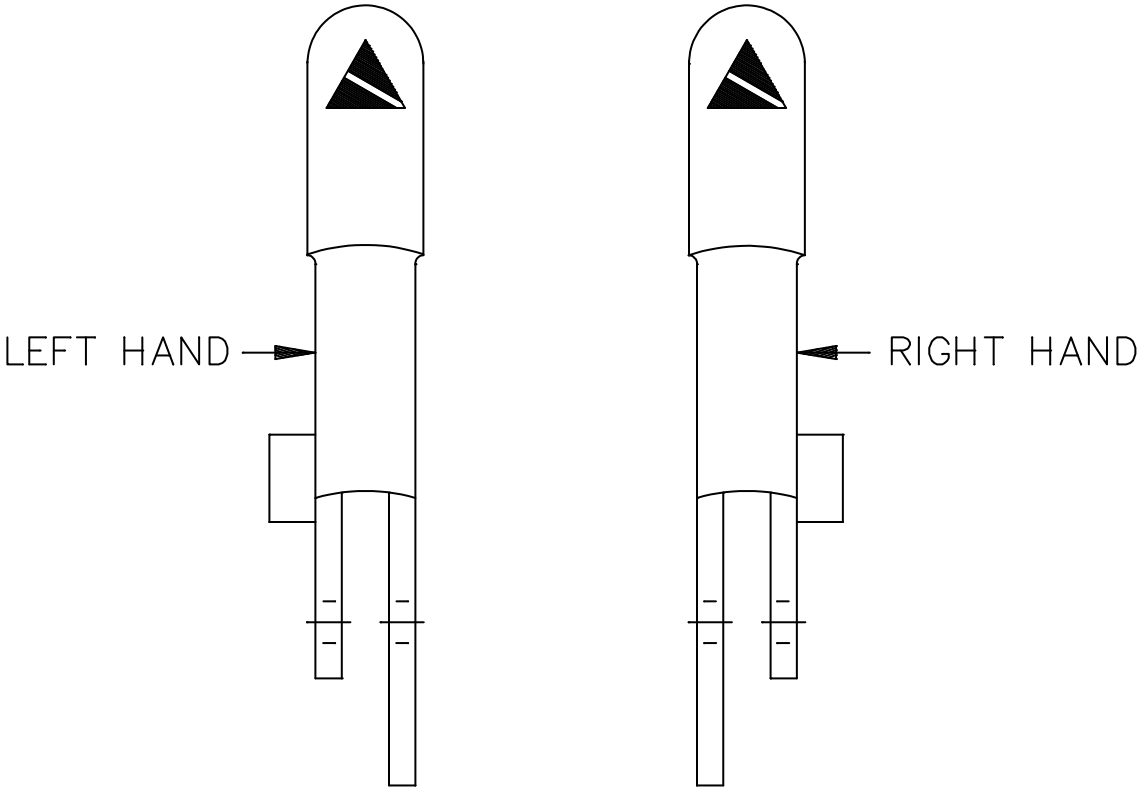

NOTES:
1. The SED symbol displayed on the extractor handles shall be in accordance with A–A–59832.
2. Unless otherwise specified, a monochromatic reproduction of the symbol displayed in A–A–59832 using any color that contrasts with the color of the extractor handle may be used.

FIGURE 2. Configurations K and S with SED symbol on extractor handle (board edge view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

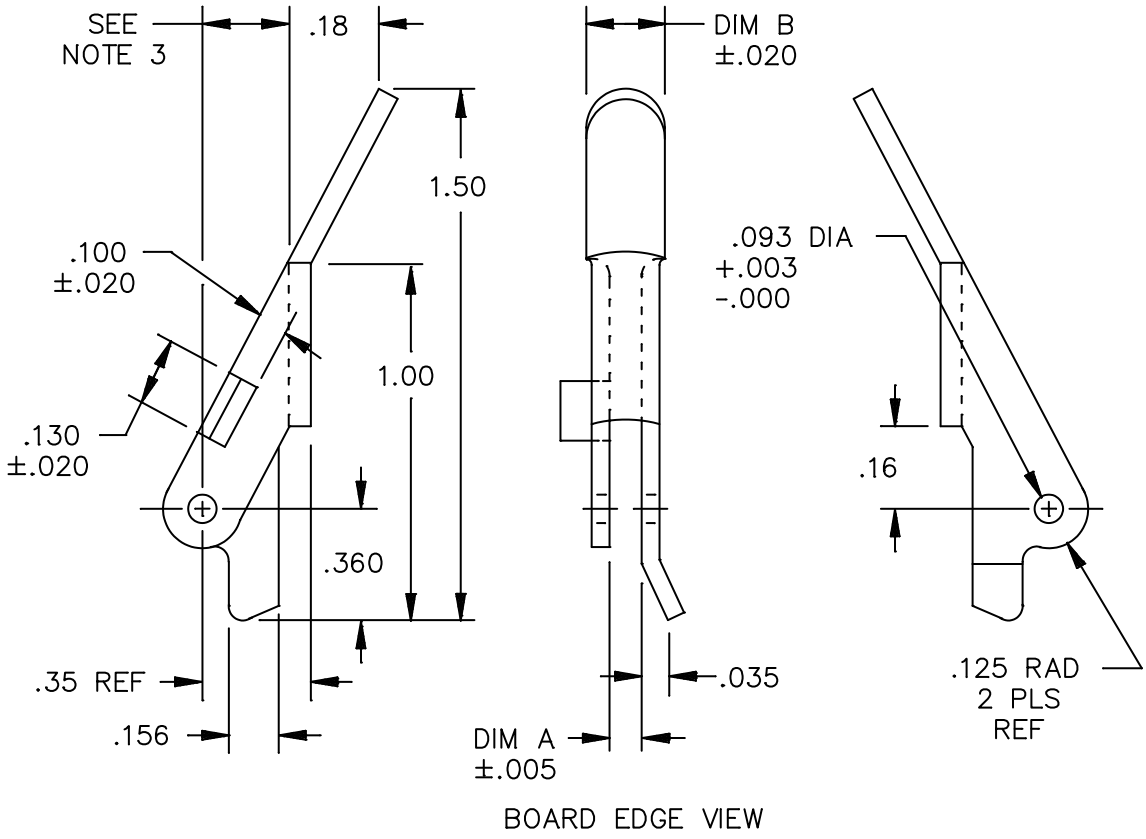


Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.16	4.06	.360	9.14
.005	0.13	.035	0.89	.125	3.18	.18	4.57	1.00	25.4
				.156	3.96	.35	8.89	1.50	38.1

NOTES:

1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 61081 and CAGE 5GB68.

FIGURE 3. Configuration M dimensions (left hand with bent leg).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

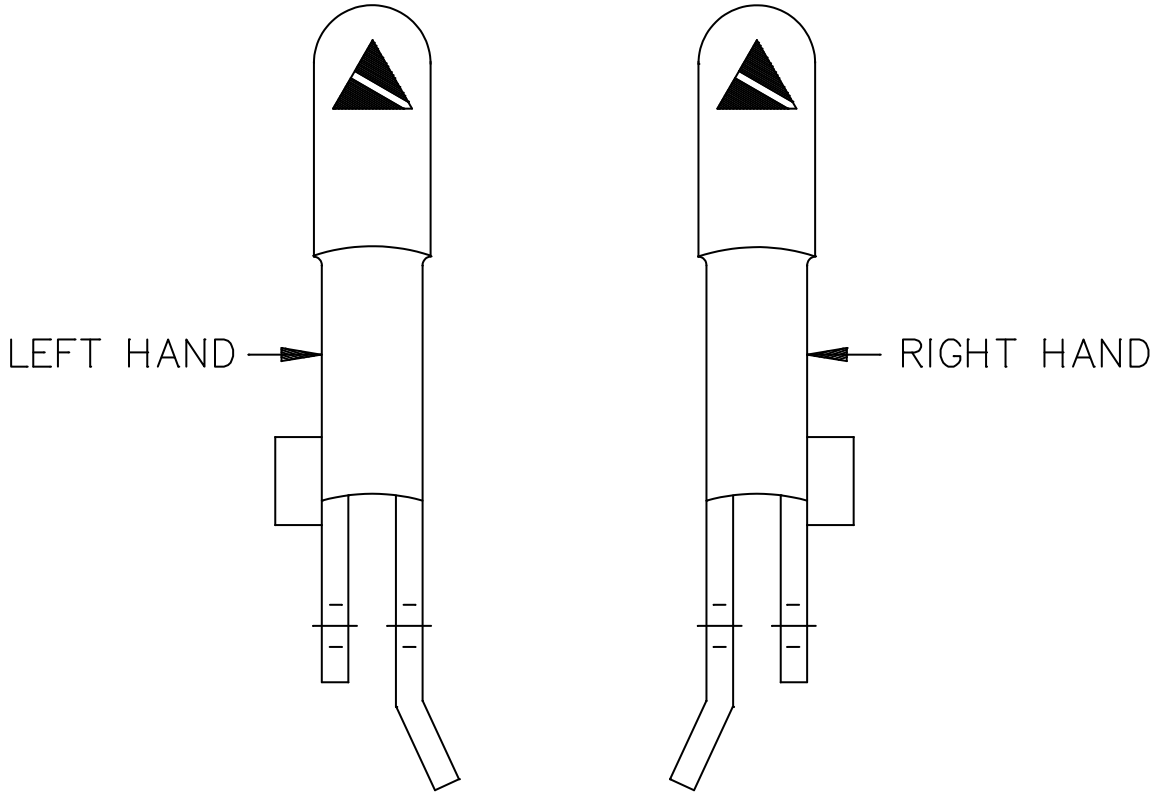

NOTES:
1. The SED symbol displayed on the extractor handles shall be in accordance with A–A–59832.
2. Unless otherwise specified, a monochromatic reproduction of the symbol displayed in A–A–59832 using any color that contrasts with the color of the extractor handle may be used.

FIGURE 4. Configurations N and P with SED symbol on extractor handle (board edge view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

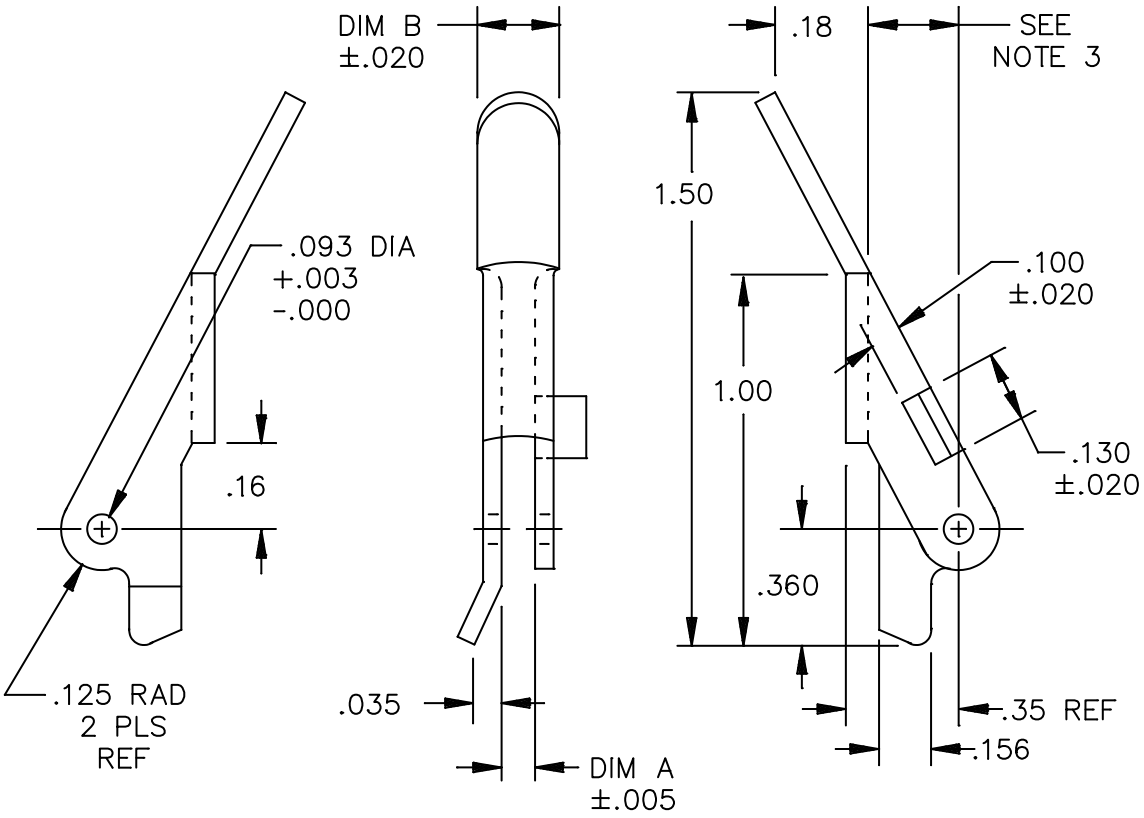


Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.16	4.06	.360	9.14
.005	0.13	.035	0.89	.125	3.18	.18	4.57	1.00	25.4
				.156	3.96	.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 61081 and CAGE 5GB68.

FIGURE 5. Configuration Q dimensions (right hand with bent leg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

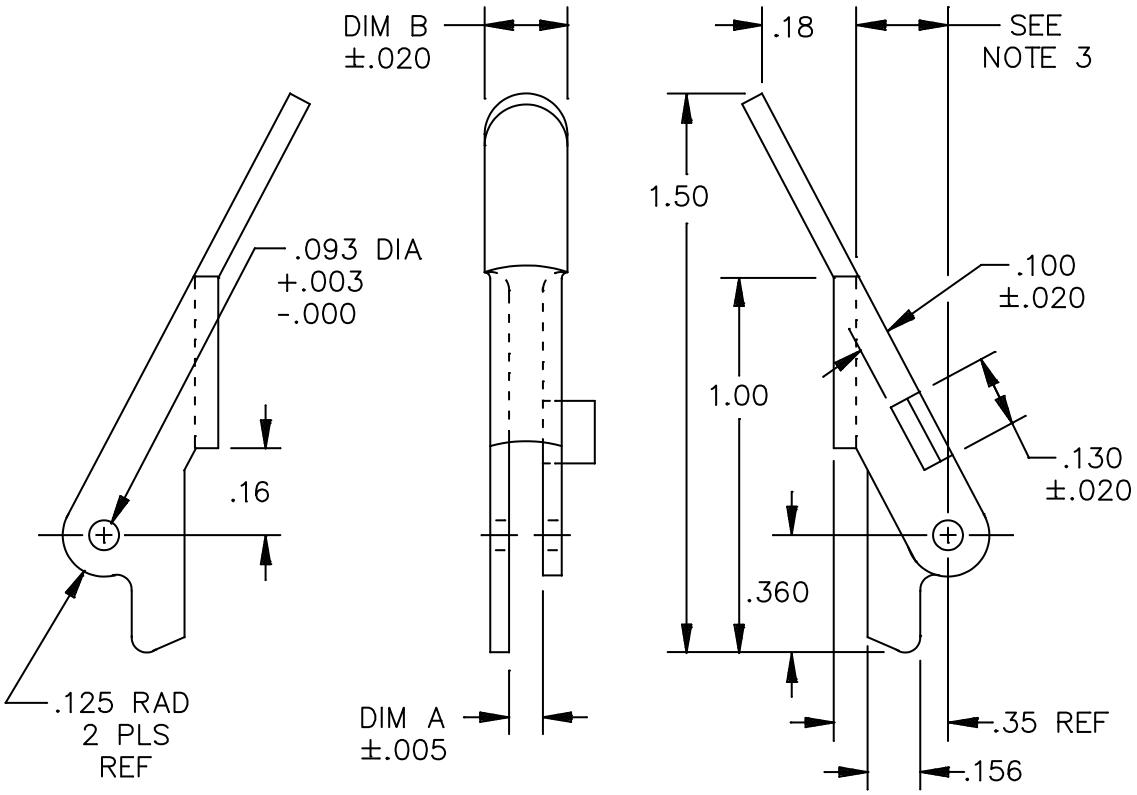

BOARD EDGE VIEW

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.16	4.06	.360	9.14
.005	0.13	.090	2.29	.125	3.18	.18	4.57	1.00	25.4
				.156	3.96	.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 61081 and CAGE 5GB68.

FIGURE 6. Configuration R dimensions (right hand).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

APPLICATION DATA.

Extractor orientation with circuit card assembly printed board. Figures 7 and 8 show the extractor mounted to a circuit card assembly and installed into a lever actuated card guide from different views. Figure 7 depicts one straight on and two angled views of a right hand extractor fastened to the printed board of a circuit card assembly. Figure 8 depicts a right side view of a circuit card assembly with a right hand extractor fastened to the printed board.

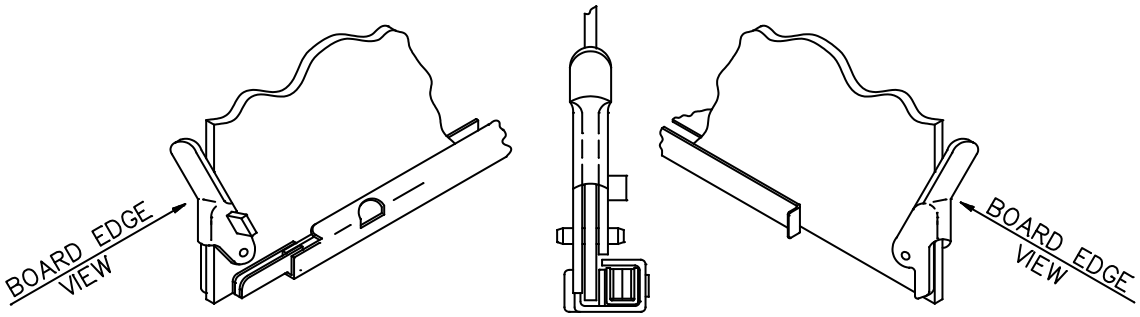


FIGURE 7. Extractor fastened to circuit card assembly.


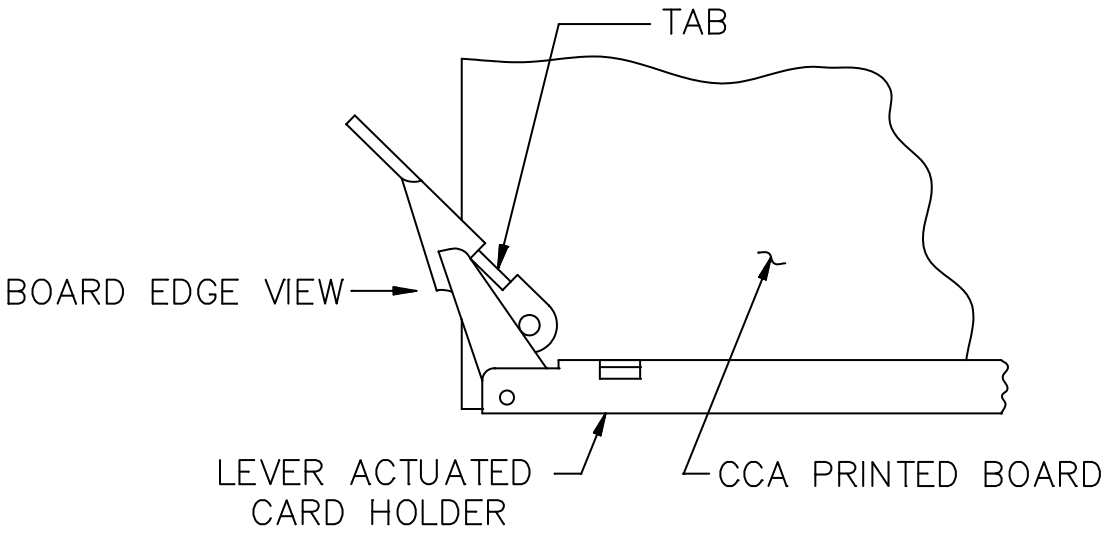


FIGURE 8. Circuit card assembly to card guide view (right hand extractor shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Circuit card positioning in relation to actuating surface. Two positions of a circuit card assembly edge to a locking card guide when seated in the connector are shown on figure 9. The circuit card assembly is ejected from its installed position by lever action of the extractor against the tab on a locking card guide (shown) or actuating surface of a card cage. The extractor will allow .030 inch (0.8 mm) over travel for tolerance take-up. Two extractors mounted on each circuit card assembly is recommended.

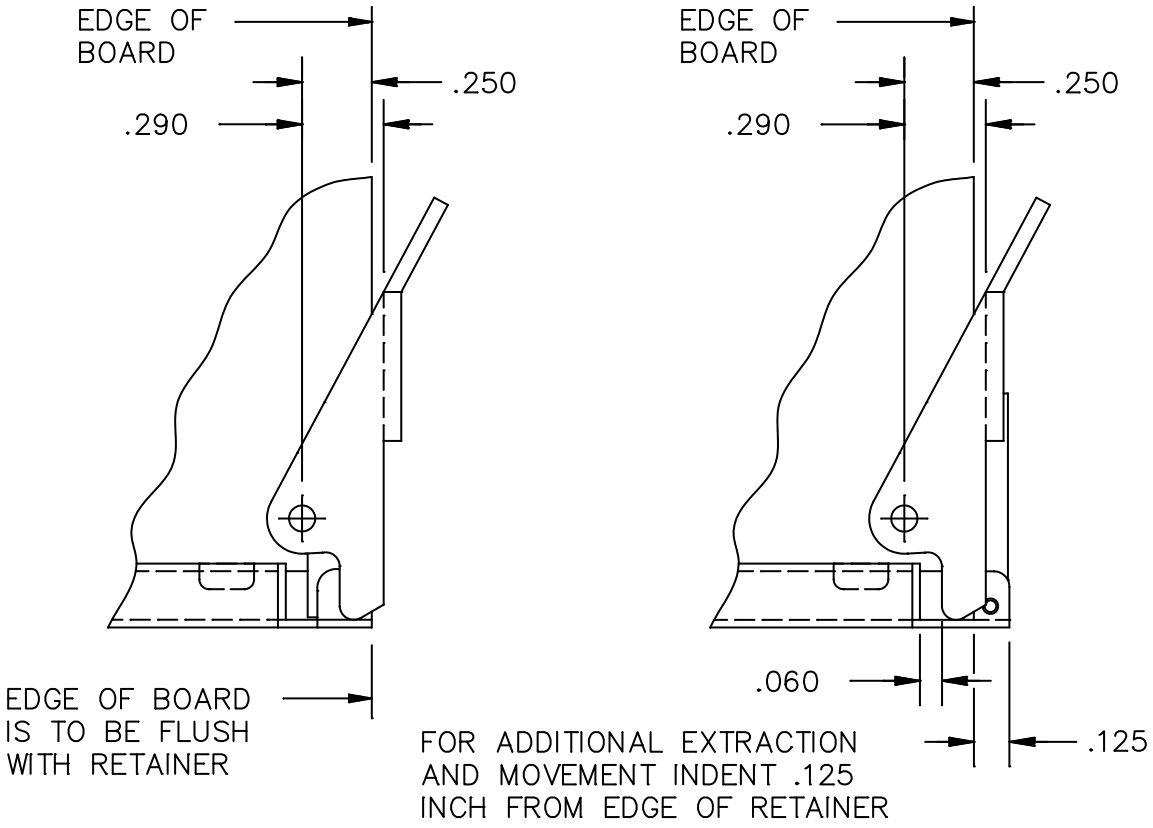


Inches	mm	Inches	mm	Inches	mm	Inches	mm
.060	1.52	.125	3.18	.250	6.35	.290	7.37

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 9. Circuit card assembly to locking card guide dimensions (right hand extractor shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Circuit card assembly printed board. The circuit card assembly should be designed so that electronic components on the printed board in the area around the extractor mounting hole have sufficient clearance for extractor rotation as shown on figure 10.

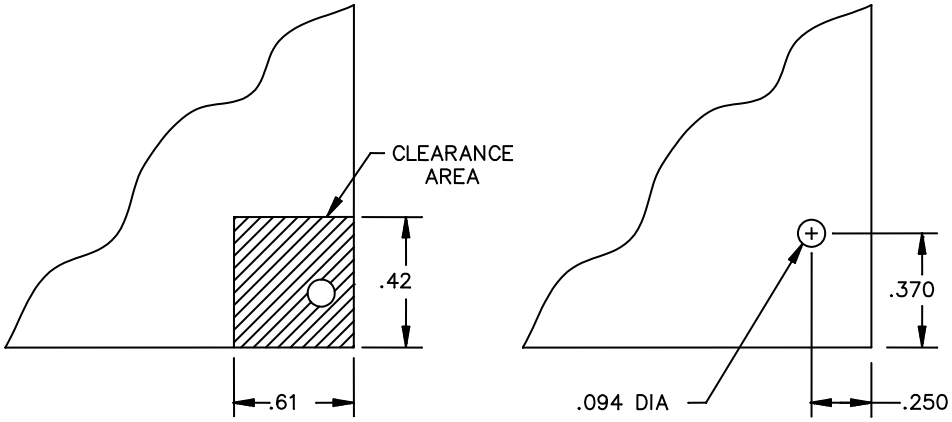

ELECTRONIC COMPONENT CLEARANCE ZONE REQUIRED TO ACCOMODATE MOUNTING AND ROTATION OF EXTRACTOR(LEG SIDE SHOWN)

PRINTED BOARD MOUNTING DIMENSIONS

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.094	2.39	.250	6.35	.370	9.40	.42	10.67	.61	15.49

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 10. Printed board clearance zone and mounting hole dimensions.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–59832 – Extractor, Electrical Card, Metal, General Requirements For.

(Copies of these documents are available online at http://quicksearch.dla.mil.)

Ordering data. Ordering data is as specified in A–A–59832.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
5BG68	American Circuit Card Retainers, Inc. 2310 E. Orangethorpe Avenue Anaheim, CA 92806–1231	Telephone: (714) 738–6194 Facsimile: (714) 446–0119 E-mail: sales@accrmfg.com URL: www.accrmfg.com
61081	Schroff – A Division of Pentair Equipment and Electronics Protection 7328 Trade Street San Diego, CA 92121–3410	Telephone: (800) 854–7086 Facsimile: (858) 740–2430 E-mail: schroff.us@pentair.com URL: http://www.pentairprotect.com

Part number (P/N) supersession data. This CID specification sheet PINs supersedes the following manufacturer's P/Ns as shown in tables IV, V, and VI, This CID specification sheet PINs also supersedes those DESC Drawing 84191 PINs as shown in table VII. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors.

PIN designator AA59832/07	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
K11AR	1119A–1LRATE	71T6–1–L–A–1–E	
K21AR	1119A–2LRATE	71T6–2–L–A–1–E	
K31AR	1119A–3LRATE	71T6–3–L–A–1–E	
K41AR	1119A–4LRATE	71T6–4–L–A–1–E	
K51AR	1119A–5LRATE	71T6–5–L–A–1–E	
K11LG	1119A–1LCGTE	71T6–1–L–A–E	
K21LG	1119A–2LCGTE	71T6–2–L–A–E	
K31LG	1119A–3LCGTE	71T6–3–L–A–E	
K41LG	1119A–4LCGTE	71T6–4–L–A–E	
K51LG	1119A–5LCGTE	71T6–5–L–A–E	
L11AR	1119A–1LRAT	71T6–1–L–A–1	
L21AR	1119A–2LRAT	71T6–2–L–A–1	
L31AR	1119A–3LRAT	71T6–3–L–A–1	
L41AR	1119A–4LRAT	71T6–4–L–A–1	
L51AR	1119A–5LRAT	71T6–5–L–A–1	
L11LG	1119A–1LCGT	71T6–1–L–A	
L21LG	1119A–2LCGT	71T6–2–L–A	
L31LG	1119A–3LCGT	71T6–3–L–A	
L41LG	1119A–4LCGT	71T6–4–L–A	
L51LG	1119A–5LCGT	71T6–5–L–A	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors – Continued.

PIN designator AA59832/07	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
M11AR	1119A–1LRATD	71T6–1–L–A–1–BL	
M21AR	1119A–2LRATD	71T6–2–L–A–1–BL	
M31AR	1119A–3LRATD	71T6–3–L–A–1–BL	
M41AR	1119A–4LRATD	71T6–4–L–A–1–BL	
M51AR	1119A–5LRATD	71T6–5–L–A–1–BL	
M11LG	1119A–1LCGTD	71T6–1–L–A–BL	
M21LG	1119A–2LCGTD	71T6–2–L–A–BL	
M31LG	1119A–3LCGTD	71T6–3–L–A–BL	
M41LG	1119A–4LCGTD	71T6–4–L–A–BL	
M51LG	1119A–5LCGTD	71T6–5–L–A–BL	
N11AR	1119A–1LRATDE	71T6–1–L–A–1–BL–E	
N21AR	1119A–2LRATDE	71T6–2–L–A–1–BL–E	
N31AR	1119A–3LRATDE	71T6–3–L–A–1–BL–E	
N41AR	1119A–4LRATDE	71T6–4–L–A–1–BL–E	
N51AR	1119A–5LRATDE	71T6–5–L–A–1–BL–E	
N11LG	1119A–1LCGTDE	71T6–1–L–A–BL–E	
N21LG	1119A–2LCGTDE	71T6–2–L–A–BL–E	
N31LG	1119A–3LCGTDE	71T6–3–L–A–BL–E	
N41LG	1119A–4LCGTDE	71T6–4–L–A–BL–E	
N51LG	1119A–5LCGTDE	71T6–5–L–A–BL–E	
P11AR	1119A–1RRATDE	71T6–1–R–A–1–BL–E	
P21AR	1119A–2RRATDE	71T6–2–R–A–1–BL–E	
P31AR	1119A–3RRATDE	71T6–3–R–A–1–BL–E	
P41AR	1119A–4RRATDE	71T6–4–R–A–1–BL–E	
P51AR	1119A–5RRATDE	71T6–5–R–A–1–BL–E	
P11LG	1119A–1RCGTDE	71T6–1–R–A–BL–E	
P21LG	1119A–2RCGTDE	71T6–2–R–A–BL–E	
P31LG	1119A–3RCGTDE	71T6–3–R–A–BL–E	
P41LG	1119A–4RCGTDE	71T6–4–R–A–BL–E	
P51LG	1119A–5RCGTDE	71T6–5–R–A–BL–E	
Q11AR	1119A–1RRATD	71T6–1–R–A–1–BL	
Q21AR	1119A–2RRATD	71T6–2–R–A–1–BL	
Q31AR	1119A–3RRATD	71T6–3–R–A–1–BL	
Q41AR	1119A–4RRATD	71T6–4–R–A–1–BL	
Q51AR	1119A–5RRATD	71T6–5–R–A–1–BL	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors – Continued.

PIN designator AA59832/07	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
Q11LG	1119A–1RCGTD	71T6–1–R–A–BL	
Q21LG	1119A–2RCGTD	71T6–2–R–A–BL	
Q31LG	1119A–3RCGTD	71T6–3–R–A–BL	
Q41LG	1119A–4RCGTD	71T6–4–R–A–BL	
Q51LG	1119A–5RCGTD	71T6–5–R–A–BL	
R11AR	1119A–1RRAT	71T6–1–R–A–1	
R21AR	1119A–2RRAT	71T6–2–R–A–1	
R31AR	1119A–3RRAT	71T6–3–R–A–1	
R41AR	1119A–4RRAT	71T6–4–R–A–1	
R51AR	1119A–5RRAT	71T6–5–R–A–1	
R11LG	1119A–1RCGT	71T6–1–R–A	
R21LG	1119A–2RCGT	71T6–2–R–A	
R31LG	1119A–3RCGT	71T6–3–R–A	
R41LG	1119A–4RCGT	71T6–4–R–A	
R51LG	1119A–5RCGT	71T6–5–R–A	
S11AR	1119A–1RRATE	71T6–1–R–A–1–E	
S21AR	1119A–2RRATE	71T6–2–R–A–1–E	
S31AR	1119A–3RRATE	71T6–3–R–A–1–E	
S41AR	1119A–4RRATE	71T6–4–R–A–1–E	
S51AR	1119A–5RRATE	71T6–5–R–A–1–E	
S11LG	1119A–1RCGTE	71T6–1–R–A–E	
S21LG	1119A–2RCGTE	71T6–2–R–A–E	
S31LG	1119A–3RCGTE	71T6–3–R–A–E	
S41LG	1119A–4RCGTE	71T6–4–R–A–E	
S51LG	1119A–5RCGTE	71T6–5–R–A–E	

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59832.

2/ The PINs listed are for gold low resistance chemical film (CID finish code LG) or red anodize (CID finish code AR). Low resistance chemical film is also available in clear (CID finish code LC). See table III for the finish codes for the other 9 anodize colors available.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors.

PIN designator AA59832/07	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
K12AB	1109A–1LBATE	71–1–L–A–5–E	
K22AB	1109A–2LBATE	71–2–L–A–5–E	
K32AB	1109A–3LBATE	71–3–L–A–5–E	
K42AB	1109A–4LBATE	71–4–L–A–5–E	
K52AB	1109A–5LBATE	71–5–L–A–5–E	
K12LC	1109A–1LCCTE	71–1–L–A–CC–E	
K22LC	1109A–2LCCTE	71–2–L–A–CC–E	
K32LC	1109A–3LCCTE	71–3–L–A–CC–E	
K42LC	1109A–4LCCTE	71–4–L–A–CC–E	
K52LC	1109A–5LCCTE	71–5–L–A–CC–E	
L12AB	1109A–1LBAT	71–1–L–A–5	
L22AB	1109A–2LBAT	71–2–L–A–5	
L32AB	1109A–3LBAT	71–3–L–A–5	
L42AB	1109A–4LBAT	71–4–L–A–5	
L52AB	1109A–5LBAT	71–5–L–A–5	
L12LC	1109A–1LCCT	71–1–L–A–CC	
L22LC	1109A–2LCCT	71–2–L–A–CC	
L32LC	1109A–3LCCT	71–3–L–A–CC	
L42LC	1109A–4LCCT	71–4–L–A–CC	
L52LC	1109A–5LCCT	71–5–L–A–CC	
M12AB	1109A–1LBATD	71–1–L–A–5–BL	
M22AB	1109A–2LBATD	71–2–L–A–5–BL	
M32AB	1109A–3LBATD	71–3–L–A–5–BL	
M42AB	1109A–4LBATD	71–4–L–A–5–BL	
M52AB	1109A–5LBATD	71–5–L–A–5–BL	
M12LC	1109A–1LCCTD	71–1–L–A–CC–BL	
M22LC	1109A–2LCCTD	71–2–L–A–CC–BL	
M32LC	1109A–3LCCTD	71–3–L–A–CC–BL	
M42LC	1109A–4LCCTD	71–4–L–A–CC–BL	
M52LC	1109A–5LCCTD	71–5–L–A–CC–BL	
N12AB	1109A–1LBATDE	71–1–L–A–5–BL–E	
N22AB	1109A–2LBATDE	71–2–L–A–5–BL–E	
N32AB	1109A–3LBATDE	71–3–L–A–5–BL–E	
N42AB	1109A–4LBATDE	71–4–L–A–5–BL–E	
N52AB	1109A–5LBATDE	71–5–L–A–5–BL–E	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors – Continued.

PIN designator AA59832/07	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
N12LC	1109A–1LCCTDE	71–1–L–A–CC–BL–E	
N22LC	1109A–2LCCTDE	71–2–L–A–CC–BL–E	
N32LC	1109A–3LCCTDE	71–3–L–A–CC–BL–E	
N42LC	1109A–4LCCTDE	71–4–L–A–CC–BL–E	
N52LC	1109A–5LCCTDE	71–5–L–A–CC–BL–E	
P12AB	1109A–1RBATDE	71–1–R–A–5–BL–E	
P22AB	1109A–2RBATDE	71–2–R–A–5–BL–E	
P32AB	1109A–3RBATDE	71–3–R–A–5–BL–E	
P42AB	1109A–4RBATDE	71–4–R–A–5–BL–E	
P52AB	1109A–5RBATDE	71–5–R–A–5–BL–E	
P12LC	1109A–1RCCTDE	71–1–R–A–CC–BL–E	
P22LC	1109A–2RCCTDE	71–2–R–A–CC–BL–E	
P32LC	1109A–3RCCTDE	71–3–R–A–CC–BL–E	
P42LC	1109A–4RCCTDE	71–4–R–A–CC–BL–E	
P52LC	1109A–5RCCTDE	71–5–R–A–CC–BL–E	
Q12AB	1109A–1RBATD	71–1–R–A–5–BL	
Q22AB	1109A–2RBATD	71–2–R–A–5–BL	
Q32AB	1109A–3RBATD	71–3–R–A–5–BL	
Q42AB	1109A–4RBATD	71–4–R–A–5–BL	
Q52AB	1109A–5RBATD	71–5–R–A–5–BL	
Q12LC	1109A–1RCCTD	71–1–R–A–CC–BL	
Q22LC	1109A–2RCCTD	71–2–R–A–CC–BL	
Q32LC	1109A–3RCCTD	71–3–R–A–CC–BL	
Q42LC	1109A–4RCCTD	71–4–R–A–CC–BL	
Q52LC	1109A–5RCCTD	71–5–R–A–CC–BL	
R12AB	1109A–1RBAT	71–1–R–A–5	
R22AB	1109A–2RBAT	71–2–R–A–5	
R32AB	1109A–3RBAT	71–3–R–A–5	
R42AB	1109A–4RBAT	71–4–R–A–5	
R52AB	1109A–5RBAT	71–5–R–A–5	
R12LC	1109A–1RCCT	71–1–R–A–CC	
R22LC	1109A–2RCCT	71–2–R–A–CC	
R32LC	1109A–3RCCT	71–3–R–A–CC	
R42LC	1109A–4RCCT	71–4–R–A–CC	
R52LC	1109A–5RCCT	71–5–R–A–CC	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors – Continued.

PIN designator AA59832/07	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
S12AB	1109A–1RBATE	71–1–R–A–5–E	
S22AB	1109A–2RBATE	71–2–R–A–5–E	
S32AB	1109A–3RBATE	71–3–R–A–5–E	
S42AB	1109A–4RBATE	71–4–R–A–5–E	
S52AB	1109A–5RBATE	71–5–R–A–5–E	
S12LC	1109A–1RCCTE	71–1–R–A–CC–E	
S22LC	1109A–2RCCTE	71–2–R–A–CC–E	
S32LC	1109A–3RCCTE	71–3–R–A–CC–E	
S42LC	1109A–4RCCTE	71–4–R–A–CC–E	
S52LC	1109A–5RCCTE	71–5–R–A–CC–E	

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59832.

2/ The PINs listed are for clear low resistance chemical film (CID finish code LC) or black anodize (CID finish code AB). Low resistance chemical film is also available in gold (CID finish code LG). See table III for the finish codes for the other 9 anodize colors available.

TABLE VI. Commercial part number supersession data for stainless steel extractors.

PIN designator AA59832/07	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
K17PC	1129A–1LTE		
K27PC	1129A–2LTE	71CR–2–L–A–E	
K37PC	1129A–3LTE	71CR–3–L–A–E	
K47PC	1129A–4LTE		
K57PC	1129A–5LTE		
L17PC	1129A–1LT		
L27PC	1129A–2LT	71CR–2–L–A	
L37PC	1129A–3LT	71CR–3–L–A	
L47PC	1129A–4LT		
L57PC	1129A–5LT		
M17PC	1129A–1LTD		
M27PC	1129A–2LTD	71CR–2–L–A–BL	
M37PC	1129A–3LTD	71CR–3–L–A–BL	
M47PC	1129A–4LTD		
M57PC	1129A–5LTD		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VI. Commercial part number supersession data for stainless steel extractors – Continued.

PIN designator AA59832/07	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
N17PC	1129A–1LTDE		
N27PC	1129A–2LTDE	71CR–2–L–A–BL–E	
N37PC	1129A–3LTDE	71CR–3–L–A–BL–E	
N47PC	1129A–4LTDE		
N57PC	1129A–5LTDE		
P17PC	1129A–1RTDE		
P27PC	1129A–2RTDE	71CR–2–R–A–BL–E	
P37PC	1129A–3RTDE	71CR–3–R–A–BL–E	
P47PC	1129A–4RTDE		
P57PC	1129A–5RTDE		
Q17PC	1129A–1RTD		
Q27PC	1129A–2RTD	71CR–2–R–A–BL	
Q37PC	1129A–3RTD	71CR–3–R–A–BL	
Q47PC	1129A–4RTD		
Q57PC	1129A–5RTD		
R17PC	1129A–1RT		
R27PC	1129A–2RT	71CR–2–R–A	
R37PC	1129A–3RT	71CR–3–R–A	
R47PC	1129A–4RT		
R57PC	1129A–5RT		
S17PC	1129A–1RTE		
S27PC	1129A–2RTE	71CR–2–R–A–E	
S37PC	1129A–3RTE	71CR–3–R–A–E	
S47PC	1129A–4RTE		
S57PC	1129A–5RTE		

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59832.

2/ The PINs listed are for passivation treatment (finish codes PC).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191–09ET	AA59832/07K11LG	84191–10ET	AA59832/07S11LG
84191–09EA	AA59832/07K12LG	84191–10EA	AA59832/07S12LG
84191–09PS	AA59832/07L17PC	84191–10PS	AA59832/07R17PC
84191–09CT	AA59832/07L11LG	84191–10CT	AA59832/07R11LG
84191–09CA	AA59832/07L12LG	84191–10CA	AA59832/07R12LG
84191–09*T 1/	AA59832/07L11A# 2/	84191–10*T 1/	AA59832/07R11A# 2/
84191–09*A 1/	AA59832/07L12A# 2/	84191–10*A 1/	AA59832/07R12A# 2/
84191–09CTBL	AA59832/07M11LG	84191–10CTBL	AA59832/07Q11LG
84191–09CABL	AA59832/07M12LG	84191–10CABL	AA59832/07Q12LG
84191–09*TBL 1/	AA59832/07M11A# 2/	84191–10*TBL 1/	AA59832/07Q11A# 2/
84191–09*ABL 1/	AA59832/07M12A# 2/	84191–10*ABL 1/	AA59832/07Q12A# 2/
84191–09PSBL	AA59832/07M17PC	84191–10PSBL	AA59832/07Q17PC
84191–09ETBL	AA59832/07N11LG	84191–10ETBL	AA59832/07P11LG
84191–09EABL	AA59832/07N12LG	84191–10EABL	AA59832/07P12LG
84191–11ET	AA59832/07K21LG	84191–12ET	AA59832/07S21LG
84191–11EA	AA59832/07K22LG	84191–12EA	AA59832/07S22LG
84191–11PS	AA59832/07L27PC	84191–12PS	AA59832/07R27PC
84191–11CT	AA59832/07L21LG	84191–12CT	AA59832/07R21LG
84191–11CA	AA59832/07L22LG	84191–12CA	AA59832/07R22LG
84191–11*T 1/	AA59832/07L21A# 2/	84191–12*T 1/	AA59832/07R21A# 2/
84191–11*A 1/	AA59832/07L22A# 2/	84191–12*A 1/	AA59832/07R22A# 2/
84191–11CTBL	AA59832/07M21LG	84191–12CTBL	AA59832/07Q21LG
84191–11CABL	AA59832/07M22LG	84191–12CABL	AA59832/07Q22LG
84191–11*TBL 1/	AA59832/07M21A# 2/	84191–12*TBL 1/	AA59832/07Q21A# 2/
84191–11*ABL 1/	AA59832/07M22A# 2/	84191–12*ABL 1/	AA59832/07Q22A# 2/
84191–11PSBL	AA59832/07M27PC	84191–12PSBL	AA59832/07Q27PC
84191–11ETBL	AA59832/07N21LG	84191–12ETBL	AA59832/07P21LG
84191–11EABL	AA59832/07N22LG	84191–12EABL	AA59832/07P22LG

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information – Continued.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191–13ET	AA59832/07K31LG	84191–14ET	AA59832/07S31LG
84191–13EA	AA59832/07K32LG	84191–14EA	AA59832/07S32LG
84191–13PS	AA59832/07L37PC	84191–14PS	AA59832/07R37PC
84191–13CT	AA59832/07L31LG	84191–14CT	AA59832/07R31LG
84191–13CA	AA59832/07L32LG	84191–14CA	AA59832/07R32LG
84191–13*T 1/	AA59832/07L31A# 2/	84191–14*T 1/	AA59832/07R31A# 2/
84191–13*A 1/	AA59832/07L32A# 2/	84191–14*A 1/	AA59832/07R32A# 2/
84191–13CTBL	AA59832/07M31LG	84191–14CTBL	AA59832/07Q31LG
84191–13CABL	AA59832/07M32LG	84191–14CABL	AA59832/07Q32LG
84191–13*TBL 1/	AA59832/07M31A# 2/	84191–14*TBL 1/	AA59832/07Q31A# 2/
84191–13*ABL 1/	AA59832/07M32A# 2/	84191–14*ABL 1/	AA59832/07Q32A# 2/
84191–13PSBL	AA59832/07M37PC	84191–14PSBL	AA59832/07Q37PC
84191–13ETBL	AA59832/07N31LG	84191–14ETBL	AA59832/07P31LG
84191–13EABL	AA59832/07N32LG	84191–14EABL	AA59832/07P32LG
84191–15ET	AA59832/07K41LG	84191–16ET	AA59832/07S41LG
84191–15EA	AA59832/07K42LG	84191–16EA	AA59832/07S42LG
84191–15PS	AA59832/07L47PC	84191–16PS	AA59832/07R47PC
84191–15CT	AA59832/07L41LG	84191–16CT	AA59832/07R41LG
84191–15CA	AA59832/07L42LG	84191–16CA	AA59832/07R42LG
84191–15*T 1/	AA59832/07L41A# 2/	84191–16*T 1/	AA59832/07R41A# 2/
84191–15*A 1/	AA59832/07L42A# 2/	84191–16*A 1/	AA59832/07R42A# 2/
84191–15CTBL	AA59832/07M41LG	84191–16CTBL	AA59832/07Q41LG
84191–15CABL	AA59832/07M42LG	84191–16CABL	AA59832/07Q42LG
84191–15*TBL 1/	AA59832/07M41A# 2/	84191–16*TBL 1/	AA59832/07Q41A# 2/
84191–15*ABL 1/	AA59832/07M42A# 2/	84191–16*ABL 1/	AA59832/07Q42A# 2/
84191–15PSBL	AA59832/07M47PC	84191–16PSBL	AA59832/07Q47PC
84191–15ETBL	AA59832/07N41LG	84191–16ETBL	AA59832/07P41LG
84191–15EABL	AA59832/07N42LG	84191–16EABL	AA59832/07P42LG

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information – Continued.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191–35ET	AA59832/07 K51LG	84191–36ET	AA59832/07 S51LG
84191–35EA	AA59832/07 K52LG	84191–36EA	AA59832/07 S52LG
84191–35PS	AA59832/07 L57PC	84191–36PS	AA59832/07 R57PC
84191–35CT	AA59832/07 L51LG	84191–36CT	AA59832/07 R51LG
84191–35CA	AA59832/07 L52LG	84191–36CA	AA59832/07 R52LG
84191–35*T 1/	AA59832/07 L51A# 2/	84191–36*T 1/	AA59832/07 R51A# 2/
84191–35*A 1/	AA59832/07 L52A# 2/	84191–36*A 1/	AA59832/07 R52A# 2/
84191–35CTBL	AA59832/07 M51LG	84191–36CTBL	AA59832/07 Q51LG
84191–35CABL	AA59832/07 M52LG	84191–36CABL	AA59832/07 Q52LG
84191–35*TBL 1/	AA59832/07 M51A# 2/	84191–36*TBL 1/	AA59832/07 Q51A# 2/
84191–35*ABL 1/	AA59832/07 M52A# 2/	84191–36*ABL 1/	AA59832/07 Q52A# 2/
84191–35PSBL	AA59832/07 M57PC	84191–36PSBL	AA59832/07 Q57PC
84191–35ETBL	AA59832/07 N51LG	84191–36ETBL	AA59832/07 P51LG
84191–35EABL	AA59832/07 N52LG	84191–36EABL	AA59832/07 P52LG

1/ The asterisk "*" denotes the anodize aluminum finish colors for DESC Drawing 84191.
2/ The pound-sign "#" denotes the anodize aluminum finish colors of table III herein.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review Activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FAS

Preparing Activity:
DLA – CC

Project: 5998–2014–007

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.