INCH-POUND

MIL-DTL-11922F
6 September 2016
SUPERSEDING
MIL-S-11922E
15 May 1986

DETAIL SPECIFICATION SHEET

SCARF, BRANCH OF SERVICE, BIB TYPE

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope: This specification covers two types of scarf used by Department of Defense.

1.2 Classification: Scarf covered by this specification will be of the following type and cable number classes (see 6.2 and 6.3).

Type I - Snap Fastener
Type II - Hook and Loop Fastener

Class 1 - Black
Class 2 - Bottle Green
Class 3 - Brick Red
Class 4 - Buff
Class 5 - Cobalt Blue
Class 6 - Crimson
Class 7 - Dark Blue
Class 8 - Green
Class 9 - Light Blue
Class 10 - Maroon
Class 11 - Jungle Green
Class 12 - Orange
Class 13 - Oriental Blue
Class 14 - Purple
Class 15 – Scarlet

Comments, suggestions, or questions on this document should be addressed to Department of the Army, The Institute of Heraldry, Technical and Production Division, 9325 Gunston Road, Building 1466, Room S112, Fort Belvoir, VA 22060-5579 or usarmy.belvoir.hqda.mbx.tioh-webmaster. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.

Class 16 - Silver Gray
Class 17 - Teal Blue
Class 18 - Ultramarine Blue
Class 19 - Yellow
Class 20 - White
Class 21 - Camouflage Pattern
Class 22 - Steel Gray
Class 23 - Golden Yellow

2. APPLICABLE DOCUMENTS:

2.1 Government Document:

2.1.1 Specifications and standards. The following specifications and standards forms a part of this specification to extent specification herein. Unless otherwise specified, the issue of these documents will be these listed in the issue of the Department of Defense Index of specifications and standards and supplement thereto, cited in the solicitation.

FEDERAL STANDARDS

FED-STD-191 – Textile Test Methods
PPP-B-676 – Boxes, Setup

COMMERCIAL ITEM DESCRIPTION

A-A-55126 – Fastener Tapes, Hooks and Piles, Synthetic

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-10884 – Fasteners, Snap
MIL-DTL-32072 – Tread, Polyester
MIL-DTL-32075 – Label; for Clothing, Equipage and Tentage (General Use)
MIL-DTL- 44031 – Cloth, Camouflage Pattern, Cotton and Nylon

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-1916 – Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 – Marking for shipment and Storage
MIL-STD-2073-1E – Parts and Equipment, Procedures for Packing of
MIL-STD-147- Palletized Unit Loads

(Copies of these documents are available online at https://assist.dla.mil.)

2.1.2 Other Government document, drawings and publications. The following other documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issue will be those in effect on the date of the solicitation.

DRAWING

THE INSTITUTE OF HERALDRY

5-2-80 – Scarf, Branch of Service, Bib Type (See Figure 1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.

NATICK RESEARCH AND DEVELOPMENT LABORATORY

2-1-2592 - OCP (See Figure 2)

(Copies of specifications, Standards and Drawings required by the supplier in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

(Figure 1 is a miniature reproduction of drawing 5-2-80 and is attached for information purpose only.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of documents are those cited in the solicitation or contract.

ASTM INTERNATIONAL

ASTM-D5118/D5118M – Boxes, Shipping Fiberboard
ASTM-D-6193 – Stich, Seam and Stitching
ASTM-D3951 – Standard Practice for Commercial Packaging

(These standards can be obtained from ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959 or www.astm.org.)

2.3 Other Publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted will be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS will be the issue of the nongovernment documents which is current on the date of the solicitation.

THE COLOR ASSOCIATION OF THE UNITED STATES

The Standard Color Reference of America, Tenth Edition
United States Army Color Card, the Official Colors for Branches, Agencies

(Application for copies of the aforementioned documents should be addressed to the color Association of the United States, 343 Lexington Avenue, New York, NY 10016.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational service.)

2.4 Order of precedence In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specification sheet or MS standards) the text of this specification will take precedence. Nothing in this specification, however, will supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard sample. Unless otherwise specified (see 6.4), a standard sample of the applicable scarf and sewing thread shall be furnished for matching color, colorfastness and finish. Samples of the camouflage pattern may be obtained from the contacting officer upon request. Variations from this specification may appear in the standard sample; hover,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.

in such cases the specification shall govern.

3.2 First article. When otherwise specified (see 6.5), before production is commenced, a sample of the finish scarf covered by this specification be submitted or made available to the contracting officer or authorized representative for inspection and test as specified in 4.2. The approval of the first article authorizes the commencement of production, but does not relieve the contactor of responsibility for compliance with all applicable provisions of this specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacturing of the production items.

3.3 Materials. Materials shall conform to the referenced specifications and the requirements specified herein.

3.3.1 Base Cloth. The base shall be a two-way texturized polyester fabric with one of the following weaves: 3 up, 2 down, twill, 2 up, 2 down, twill or plain. The polyester yarn shall be 150 denier for warp and filling before texturizing. The weight of the fabric shall be 5 (plus or minus) .4 oz per square yard. The materials for the class 21 camouflage pattern only, shall be in accordance with class 1 of MIL-DTL-44031.

3.3.1.1 Color. The color of the cloth of the classes 1 through 22 shall conform to the list below and shall match the color of the standard sample (see 3.1), under natural (North sky) daylight having a color temperature of 7500 (plus or minus) 500 Kelvin. The color shall be a good approximation to the standard sample under incandescent lamplight at 2800 (plus or minus) 100 degrees Kelvin. The cable number cited are from the standard Color Reference of America, Tenth Edition and the United States Army Color Card, the Official Colors for Branches, Agency, (see 2.2).

Color and Cable NO.		Color and Cable NO.	
Black	65018	Orange	65004
Bottle Green	80066	Oriental Blue	80176
Brick Red	65020	Purple	65009
Buff	65015	Scarlet	65006
Cobalt Blue	65011	Silver Gray	65008
Crimson	65013	Teal Blue	80135
Dark Blue	65012	Ultramarine Blue	65010
Green	65007	Yellow	65002
Light Blue	65014	Bright White	67206
Maroon	65017	Steal Gray	67199
Golden Yellow	65001	Jungle Green	65025

3.3.1.1.1 Colorfastness. When tested as specified in 4.5.2 the dyed cloth shall show fastness to laundering, perspiration and light equal to or better than the standard sample. If no standard sample is available, the dyed cloth shall show good fastness to laundering, perspiration and light.

3.3.1.2 Camouflage. The camouflage pattern shall be in accordance with drawing number 2-1-2592 (US Army Natick Research and Development Laboratories drawing)

3.3.1.3 Finish. The finish of the basic cloth shall match the finish of the standard sample. When no standard sample is available the finish must be approved by contracting officer prior to production.

3.3.2 Thread. The thread for machine stitching shall be polyester thread, conforming to type I class 3, size A of MIL-DTL-32072.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.

3.3.2.1 Color. The color of the thread shall approximate the colors specified in 3.3.1.1, and shall match the standard sample furnished (see 3.1).

3.3.2.1.1 Colorfastness. The dyed thread shall show fastness to laundering, wet-dry cleaning, perspiration and light equal to or better than the standard sample. When no standard sample is available, the thread shall show good fastness to laundering, perspiration and light.

3.3.3 Snap fasteners. The snap fasteners shall conform to style 3 (pronged ring head type), 17 lines, finish 3 of MIL-DTL-10884.

3.3.4 Inner lining. The inner lining of the neck band shall be cotton buckram of light, open-weave, single ply fabric weighing 2.5 ounces (minimum) per square yard having a minimum thread count of 40 ends in the warp and 20 ends in the filling.

3.3.5 Velcro fastener. The fastener shall conform to type II, class 1, A-A-55126 and dimensions shown on the drawing 5-2-80. The fastener shall be compatible color shade to the scarf.

3.4 Construction. The scarfs shall be constructed in accordance with figure 1 and the requirement specified herein.

3.4.1 Seams and Stitching. All stitching shall be in accordance with ASTM-D6193, using thread specified in 3.3.2. There shall be 8 to 10 stitches to the inch. Thread breaks shall be back stitched not less than ½ inch. Thread tension shall be maintained so that there shall be no loose stitching and so the lock for the 301 stitching shall be embedded in the center of the materials sewn.

3.4.2 Cutting. Patterns for cutting shall be furnished by the contractor and shall provide pieces which when properly assembled will meet the dimension specified on drawing 5-2-80. The cutting and layout of materials shall be such that the wrap of the bib fabric shall be in the vertical direction and the warp of the neckband fabric shall be in the horizontal direction on the finished scarf when viewed as shown on drawing 5-2-80.

3.4.3 Manufacturing operations.

3.4.3.1 Bib The bib shall be made of a single ply of material specified in 3.3.1. The bib shall be hemmed on both sides and one end as shown on drawing 5-2-80, using 301 stitching.

3.4.3.2 Neckband (1) The unhemmed end of the bib shall be centered on the neckband piece and the piece folded lengthwise over the top of the bib. The neckband piece shall then be stitched along its full length 1/16 inch to 1/8 inch from the edge with a 3/8 inch turn under as shown on figure 1. The stitch type shall be 301 and the seam type shall be LSe-1. (2) The open ends of the neckband shall be adjusted to a finished length of 19 inches plus or minus 1/4 inch and closed with zig-zag stitching securely tacking the stitching ends. A 304 stitch type and SSc-1 seam type shall be used. As an alternate the open ends of the neckband may be finished with stitch type 504 and 505, with 28 (plus or minus) 4 stitches per inch and overstitched. 1/4 inch at the stitching ends or bartacked to cover the final 3 stitches. (3) Snap fastener specified in 3.3.3 or Velcro fastener specified in 3.3.5 shall be attached in the location specified in drawing 5-2-80. Velcro shall be attached on all sides with stitch type 301. (4) The left edge of the label shall be placed 1- 1/4 inches, plus or minus 1/4 inch to the right of the vertical centerline of the neckband and stitched on all four sides with a single row of stitching using stitch type 301.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.

3.4.3.3 Finishing. The scarfs shall be cleaned of all spots and stains and pressed smooth. Care shall be taken to remove gloss marks and creases.

3.5 Marking. Scarf shall be marked with a label 1-1/4 inches wide by 2-1/2 inches long conforming to type VI, class 15 of MIL-DTL-32075. Title of specification, specification number, class number and instructions to “Launder or Dry Clean” shall appear on label. Scarf manufactured for commercial sale shall be marked with the manufacturer’s hallmark in lieu of the contract number and stock number. “

3.6 Workmanship. Scarf shall be clean, well made and shall meet the acceptable quality levels established by this specification.

4. VERIFICATION

4.1 Classification of inspection. The inspection requirements specified herein are classified as follows**:**

a**.** First article Inspection (see 4.2)

b**.** Quality Conformance inspection (see 4.3)

4.2 First Article inspection. Inspection and testing of the first article shall be made on completely finished scarf for all provision of this specification applicable to the end item examination and tests.

4.3 Quality conformance inspection. Inspection shall be in accordance with the provision set forth in MIL-STD-1916, except otherwise indicated.

4.4 Examination. Each scarf shall be examined for compliance with the requirement specified in 3.2 through 3.6. Any redesign or modification of the contractor’s standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet the specified requirements shall encompass all visual examination and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.5 Quality conformance inspection.

4.5.1 In-process inspection. Inspection of the manufacturing process shall be made by any point to determine whether operations or assemblies are accomplished as specified on figure 1 or as specified herein. The Government reserve the right to exclude from consideration for acceptance any assembly for which in-process inspection has indicated non- conformance.

4.5.2 Inspection of components and materials. In addition to the quality assurance provisions of the referenced specifications and standards, testing shall be conducted in accordance with the test methods as specified in FED-STD-191, and shall be performed on material as listed in table ii. For sample unit requirements, the inspection level shall be s-1 and the AQL shall be 6.5 defects per hundred units. The requirements shall be applicable to the sample unit. When the data in the “#determ per s/u” and the “results reposted sample as” columns are not specified in the table II, they shall be as required by the referenced test method. The sample unit shall be one yard of fabric.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.

TABLE II Testing of Components

Component and lot Size expressed in term of	Characteristic	Rqm't para	Test method	#determ Per s/u	Result reported as
Basic cloth (linear yard)	Yarn (wrap and filling)	3.3.1	2/		
	Weave	3.3.1	Visual	1	Pass or fail
	Weight /sq yd	3.3.1	5041		
	Texture:				
	Warp	3.3.1	5050		
	Filling	3.3.1	5050		
	Breaking Strength:				
	Warp	3.3.1	5100		
	Filling	3.3.1	5100		
	Colorfastness				
	Wet-dry				
	Cleaning	3.3.2.1.1	5622		
	Laundering	3.3.2.1.1	5614		
	Perspiration	3.3.2.1.1	5680		
	Light 1/	3.3.2.1.1	5660		Pass or fail
	Finish	3.3.1.3	Visual	1	

1/ In the event of dispute resulting from the test with method 5660, or as a result of suspected anomalous behavior of certain dye types or formulations, the contracting officer may authorize the exposure to natural light in accordance with method 5662.

2/ a contractor's certification of compliance is acceptable for these requirement.

4.5.3 Certification of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.5.4 Inspection of the end item.

4.5.4.1 Visual examination. Defects found during the examination shall be classified in accordance with 4.5.4.1.1 and 4.5.4.1.2.

Examine	CLASSIFICATION Defect	Major	Minor
Fabric	Hole, cut or tear, smash, multiple float or slub	X	-
	Misweave	X	-
	Shade bar or streak affecting appearance	X	-
	Off shade, not within established tolerance	X	-
Construction	Pieces not cut in specified direction	-	X
	Hem on wrong side of bib	X	-
	Not assembled as specified	-	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.

	Snap fasteners clinched defective, e.g., cannot be closed	X	-
	Fasteners missing or misplace	X	-
	Snap fastener clinched too tight, i.e., cuts Surrounding material	X	-
	Noticeable puckering of neckband after all three Fastener are engaged	-	X
	Operation omitted or not as specified	X	-
	Velcro not type specified	X	-
	Snap fastener not type specified	X	-
Open seams	More than 1 inch	X	-
And raw edge	One inch or less	-	X
Stitches	Incorrect seam type	X	-
And seams	Incorrect stitch type	X	-
	More than the maximum number of stitches per inch	-	X
	Less than the minimum number of stitches per inch	X	-
	Thread breaks not back stitched	-	X
	Seam Crooked or irregular affecting appearance	-	X
	Seam more than 1/8 inch from the turned under edge of Neckband or pressed edge of the bib	-	X
	Needle chews or run-off affecting appearance or Serviceability but not seriously	X	-

Examine	Defect	CLASSIFICATION Major	Minor
	Failure to cover stitching end when applicable	-	X
	Loose tension resulting in loose seam	-	X
	Tight tension i.e., fabric puckers excessively	-	X
Cleanness	Spot or stain affecting appearance	-	X
	Thread ends not trimmed	-	X
Pressing	Burned or scorched	X	-
	Poorly pressed i.e., has creases or shade marking	-	X
Marking	Label improperly placed, so as to be visible when worn	X	-
	Marking not as specified i.e., illegible or incorrect	-	X

4.5.5.1.2 Dimensional defect. Any dimension that is not within the specified tolerance shall be classified a defect.

4.5.4.1.3 Inspection level and acceptable quality levels (AQL's). The inspection levels and the acceptable quality levels expressed in defects per hundred units shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.

	Inspection Level	AQL Major	AQL Total
For defects applicable to 4.5.4.1.1	II	2.5	10.0
For defects applicable to 4.5.4.1.2	S-4	(one class)	2.5

4.5.5 Examination of preparation for delivery requirement. An examination shall be made to determine that packaging, packing and marking comply with the requirements of section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Shipping containers fully prepared for delivery shall be examined for the defects of closure listed below. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the acceptable quality level shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location Sequence or method of application.
Materials	Any component missing, any component damage, affecting Serviceability.
Workmanship	Inadequate application of components such as incomplete Closure of container flaps, inadequate stapling.
Contents	Number per container is more or less than required.

4.5.6 Palletization examination. An examination shall be made to determine that the palletization is in compliance with the section 5 requirements. Defect shall be scored in accordance with the list below. The sample unit shall be palletized unit load fully package. The lot size shall be the number of palletized unit load in the inspection lot. The inspection level shall be S-1 and the acceptable quality level (AQL), expressed in term of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimension	Length, width, or height exceeds per specified maximum Requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. Scarfs covered by this specification are intended to be worn with class A uniforms to designate the wearer is assigned to a specific department or branch of service. Type I, scarfs are intended for use by the Army and type II, scarfs are intended for use by the Air Force.

6.2 Acquisition requirement. Procurement documents should specify the following:

(a) Type and class (see 1.2).
(b) Title, date and number of this specification.
(c) When a standard sample will not be furnished (see 3.1).
(d) When first article is not required (see 3.2).
(e) Marking information to appear on scarf level (see 3.5).
(f) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 The following is a list of users according to the class and color 1/

Class 1 (Black)	- Chaplain Corps, US Army
Class 2 (Bottle Green)	- Psychological Operations Units, US Army
Class 3 (Brick Red)	- Transportation Units, US Army
Class 4 (Buff)	- Quartermaster, supply and Service, Supply and Transportation and Support Units, US Army and Coast Guard
Class 5 (Cobalt Blue)	- Chemical Units, US Army
Class 6 (Crimson)	- Ordnance and Maintenance Units, US Army
Class 7 (Dark Blue)	- National Guard Bureau and Judge Advocate General, Adjutant General, Inspection General, Units, US Army And Coast Guard
Class 8 (Green)	- Staff Specialist and Military Police Units, US Army
Class 9 (Light Blue)	- Infantry Units, US Army
Class 10 (Maroon)	- Medical Units, US Army
Class 11 (Jungle Green)	- Special Forces Units, US Army
Class 12 (Orange)	- Signal Units, US Army
Class 13 (Oriental Blue)	- Military Intelligence Units, US Army
Class 14 (Purple)	- Civil Affairs Units, US Army

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.

Class 15 (Scarlet)	- Engineers and Artillery Units, US Army and Permanent Professors, USMA
Class 16 (Silver Gray)	- Finance Units, US Army
Class 17 (Teal Blue)	- Branch, US Army
Class 18 (Ultramarine Blue)	- US Air Force Immaterial and Aviation Units, US Army
Class 19 (Yellow)	- Armor and Cavalry Units, US Army
Class 20 (White)	- Security Police, US Air Force and Coast Guard
Class 21 (Camouflage, OCP)	- US Army Determined by Local Commander
Class 22 (Steel Gray)	- Cyber Units, US Army
Class 23 (Golden Yellow)	- Electronic Warfare Units, US Army

1/ Warrant Officers of the US Army will wear the scarf of branch to which assigned.

6.4 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.5 First Article. When a first article inspection is required, the item should be a first article sample, or it may be a standard production item from the contractor's current inventory as specified in 4.2. The first article should consist of complete scarf. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such product, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.6 Subject term (key word) listing.

Base Cloth
Camouflage
Color
Colorfastness
Hook and loop
Inner lining
Seams and Stitching
Snap fasteners
Thread
Cutting
Neckband
Finishing
Marking
Workmanship

6.7 Changes from previous issue. Asterisks or vertical lines are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.

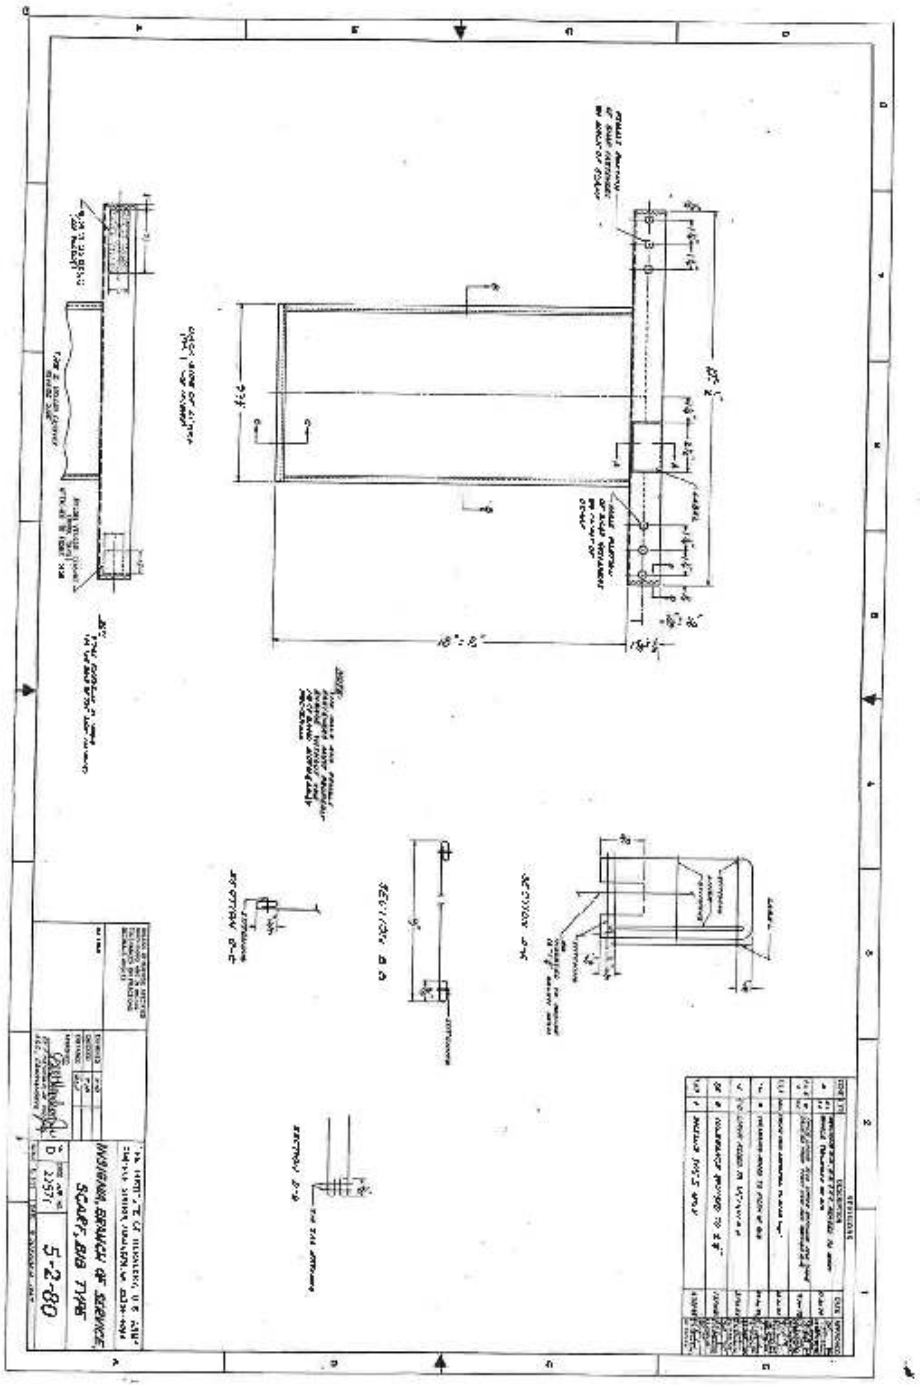


Figure 1: TIOH 5-2-80 Scarf, Branch of Service, Bib Type

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.

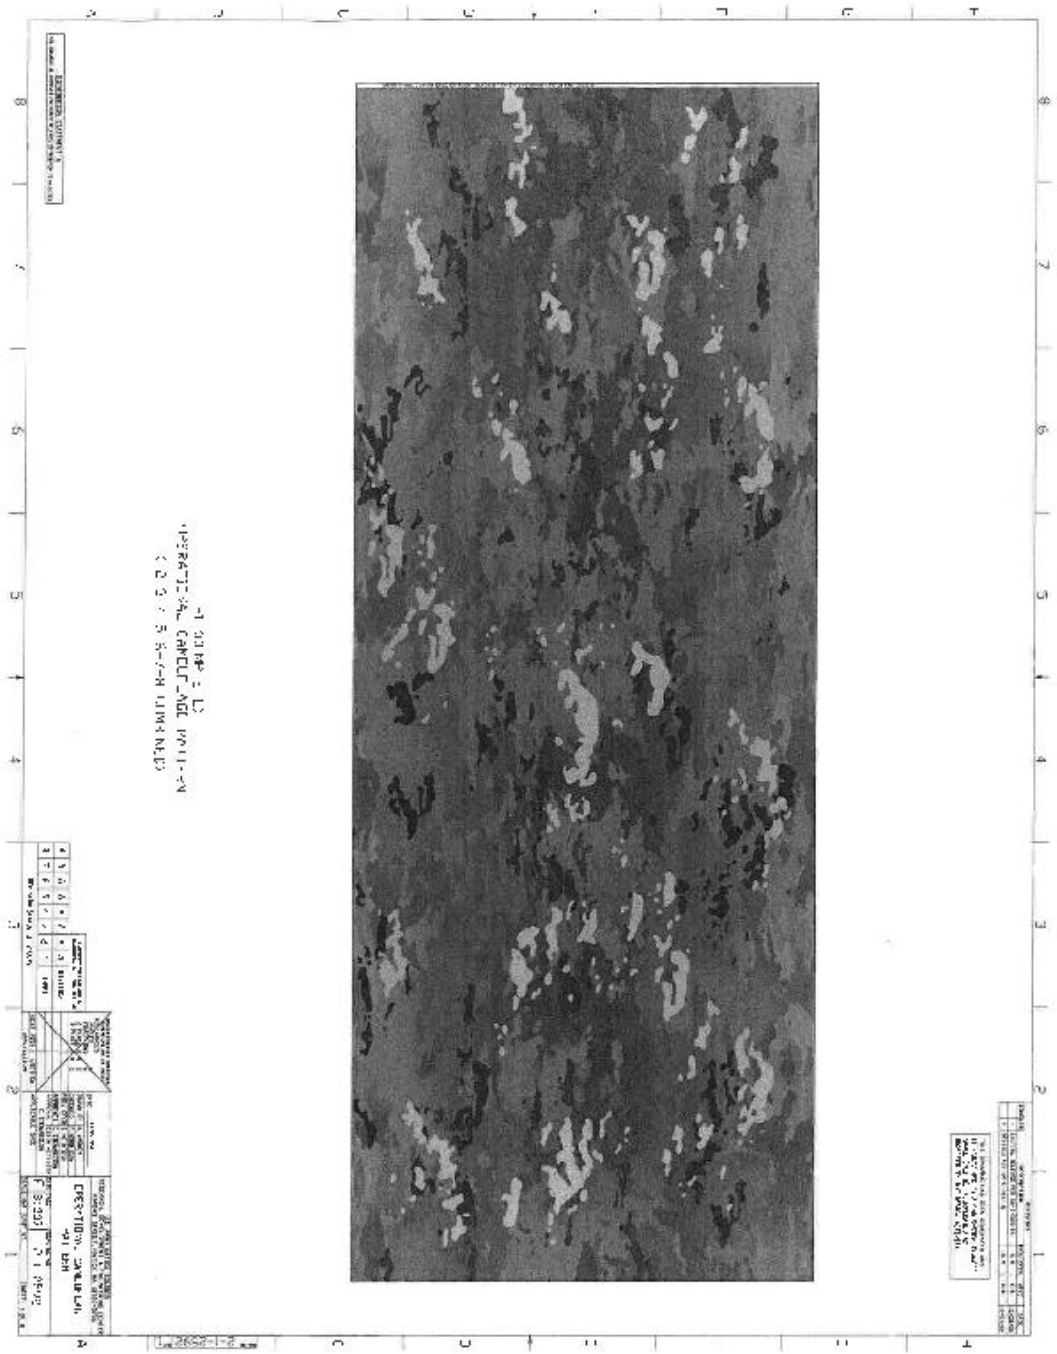


Figure 2: 2-1-2592 Natick Research and Development Lab OCP

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Preparing Activity:
Army - IH

Review Activity:
DLA - CT

(Project No. 8455-2016-686)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:07Z
Check the source to verify that this is the current version before use.