MIL-P-11943 (Ord)
17 April 1952
SUPERSEDING
Pkg. Inst. AFPS-30
14 February 1944

MILITARY SPECIFICATION

PACKAGING OF TELESCOPES M60 SERIES

1. SCOPE

1.1 This specification covers packaging, packing and marking for interplant shipment, domestic shipment and storage, and overseas shipment for the M60, M60A1C, and M60A1D telescopes.

Item	Ord. Dwg. No.*	Stock No.
Telescope, M60	91-167	F002-7579906
Telescope, M60A1C	91-167	F002-7597806
Telescope, M60A1D	91-167	F002-7597807

*For reference only

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS

2.1 The following specifications, standards and drawings, of the issue in effect on date of invitation for bids, form a part of this specification.

SPECIFICATIONS

FEDERAL

NN-B-601 - Boxes; Wood-Cleated-Plywood, For Domestic Shipment.
NN-B-621 - Boxes; Wood, Nailed and Lock-Corner.
UU-C-843 - Cushioning Materials, Cellulosic.
UU-T-111 - Tape; Paper, Gummed (Kraft).
LLL-B-631 - Boxes; Fiber, Corrugated (For Domestic Shipment).
LLL-B-636 - Boxes; Fiber, Solid (For Domestic Shipment).

MILITARY

JAN-P-101 - Packaging and Packing for Overseas Shipment - Adhesive, Water-Resistant, For Sealing Fiberboard Boxes.
JAN-P-105 - Packaging and Packing for Overseas Shipment - Boxes, Wood, Cleated, Plywood.
JAN-P-106 - Packaging and Packing for Overseas Shipment - Boxes; Wood, Nailed.
JAN-P-108 - Packaging and Packing for Overseas Shipment - Boxes; Fiberboard (V-Board and W-Board), Exterior and Interior.
JJAN-P-127 - Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure-Sensitive, Water-Resistant.
JAN-P-133 - Packaging and Packing for Overseas Shipment - Boxes, Set-Up, Paperboard.
JAN-P-139 - Packaging and Packing for Overseas Shipment - Plywood, Container Grade.
MIL-B-131 - Barrier-Material; Water-Vaporproof, Flexible.
MIL-C-3464 - Desiccants (Activated) in Bags; For Static Dehumidification and Packaging.

STANDARDS

MILITARY

MIL-STD-129 - Marking of Shipments.

Source: https://assist.dla.mil -- Downloaded: 20260-17T22:09Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials.- The following shall apply wherever packaging materials are not identified in the text by a specification:

Designation	Reference
Cellulosic cushioning material	UU-C-843, any type, any class, at least 1/4 inch in thickness.
Gummed tape	UU-T-111, grade A or B.
Pressure-sensitive tape	JAN-P-127, any type, any grade, at least 2 inches in width.

3.2 Cleaning

WARNING: The optics on this instrument, including filters B6179185, B6179186, and B6179187, have been cleaned and covered before being sent to the packaging section. If the wrapping on a lens has become inadvertently unwrapped or damaged the instrument shall be subject to further inspection and rewrapping by competent optical personnel.

3.3 Packaging

3.3.1 Cushioning optics.- The covered lenses, including the filters shall be surmounted with cellulosic cushioning material. The cushioning material shall be secured with pressure-sensitive tape.

3.3.2 Unit container.- The unit container shall conform to any compliance symbol except W5c, W6c, or W6s, any style except FTC of Specification JAN-P-108. A unit container having a minimum bursting strength of 200 pounds per square inch and conforming with style RSC or OLC (full overlap) of Specification LLL-B-631 or LLL-B-636 may be used when an interplant shipment is to be made.

3.3.3 Water-vaporproof barrier.- The unit container shall be lined with a bag fabricated from water-vaporproof barrier material conforming to class B of Specification MIL-B-131. If the manufacturer's joint of the unit container is stitched or stapled, a strip of fiberboard shall be used to cover the joint in the interior of the box to prevent rupture or abrasion of the water-vapor-proof bag. The bag shall fit the interior of the unit container snugly leaving sufficient material for final closure. Closure shall be effected by means of heat sealing after excess entrapped air is removed.

3.3.4 Immobilizing of telescope.- The telescope shall be immobilized within the water-vaporproof bag by means of pads, fiberboard cells, and fiberboard wraps as indicated in figure 1. The pads and cells shall fit snugly in the water-vapor-proof bag. The pads and fiberboard cells shall be constructed from double-faced corrugated fiberboard, minimum Mullen Test 275 pounds. The ends of the telescope shall be wrapped with sufficient flexible single-faced corrugated fiberboard to insure that the wrapped ends shall fit snugly between the surfaces of the pads and cells. As indicated in figure 1 not less than 3 thicknesses of the fiberboard shall be used at each end.

3.3.5 Filters.- The individually cushioned filters shall be wrapped together with flexible single-faced corrugated fiberboard and the wrap shall be secured with gummed tape. The wrapped filters shall be immobilized within the water-vaporproof bag.

3.3.6 Eyeshield.- The eyeshield shall be placed in a mailing tube or a set-up paperboard box conforming to Specification JAN-P-133 in such a manner that it will

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:09Z
Check the source to verify that this is the current version before use.

not become deformed. The ends of the tube or seams of the box shall be covered with gummed tape. The packaged eyeshield shall be immobilized within the water-vapor-proof bag.

3.3.7 Desiccant.- The required units of desiccant conforming to class 2 of Specification MIL-D-3464 shall be immobilized within the water-vaporproof bag.

3.3.8 Closure of unit container.- The unit container shall be closed by applying water-resistant adhesive conforming to Specification JAN-P-101, over all areas of contact between the flaps and by covering all seams, including the manufacturer's joint, with pressure-sensitive tape. Unit containers may be sealed with gummed tape in lieu of pressure-sensitive tape when an interplant shipment is to be made.

3.4 Packing

3.4.1 Isolation of telescopes in shipping container.- Unless specifically authorized otherwise, only telescopes with the same stock numbers shall be packed in a shipping container.

3.4.2 Interplant shipment and domestic shipment and storage

3.4.2.1 The unit containers shall be immobilized in a shipping container conforming to either of the following Specifications:

NN-B-601 - style A or B, type A, B, or C, (any type may be used when an interplant shipment is to be made).
NN-B-621 - style 2 or 4.

3.4.2.2 The gross weight of the shipping container shall not exceed 200 pounds. Nailed wood boxes shall be strapped with flat steel straps in conformance with Specification NN-B-621. When their gross weight exceeds 100 pounds, plywood boxes shall be strapped with flat steel straps in accordance with Specification JAN-P-105. Straps shall not be stapled.

3.4.3 Overseas shipment

3.4.3.1 The fiberboard boxes shall be immobilized in a shipping container conforming to either of the following Specifications, utilizing group I or II lumber and flat steel straps:

JAN-P-105 - style A or B, Plywood shall conform to type A or B, condition I, of Specification JAN-P-139.
JAN-P-106 - style 2 or 4, Minimum thickness of lumber for sides, top, and bottom shall be 11/16 inch when the shipment is to be made in an ocean-going vessel.

3.4.3.2 The gross weight of an overseas shipping container shall not exceed 70 pounds.

3.5 Marking

3.5.1 Except as noted in 6.2 and as specified in this section, unit containers and shipping containers shall be marked in accordance with MIL-STD-129.

3.5.2 An official ordnance corps inspection seal (escutcheon) shall be placed on each unit container in such a manner that the seal will be destroyed if the container is opened. An escutcheon shall be placed on each shipping container with the identification data. The inspecting ordnance district's symbol such as NYOD, BOD, etc., shall be added to each escutcheon.

3.5.3 When the telescopes are packed for domestic shipment and storage, packing lists, as indicated in paragraph 6.5.1 of Standard MIL-STD-129, showing the serial numbers of the telescopes shall be required. When the telescopes are packed for overseas shipment the serial numbers shall be included in the identification data.

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:09Z
Check the source to verify that this is the current version before use.

4. INSPECTION, SAMPLING, AND TEST PROCEDURES

4.1 Inspection.- Inspection shall be made throughout the entire process of packaging and packing.

4.2 Test procedures.- The Government reserves the right to use any established commercial method of test, and such additional information deemed necessary to determine compliance with the requirements and intent of this instruction.

5. PREPARATION FOR DELIVERY

Not applicable

6. NOTES

6.1 Ordering data.- Invitations for bids and contracts should specify the title, number, and date of this specification, and the type of shipment involved.

6.2 The marking of overseas shipping containers by Army installations shall be in accordance with Department of the Army Technical and Air Force Manual SR 746-30-5, Marking of Oversea Supply.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related hereto.

CUSTODIAN:

Army- Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:09Z
Check the source to verify that this is the current version before use.

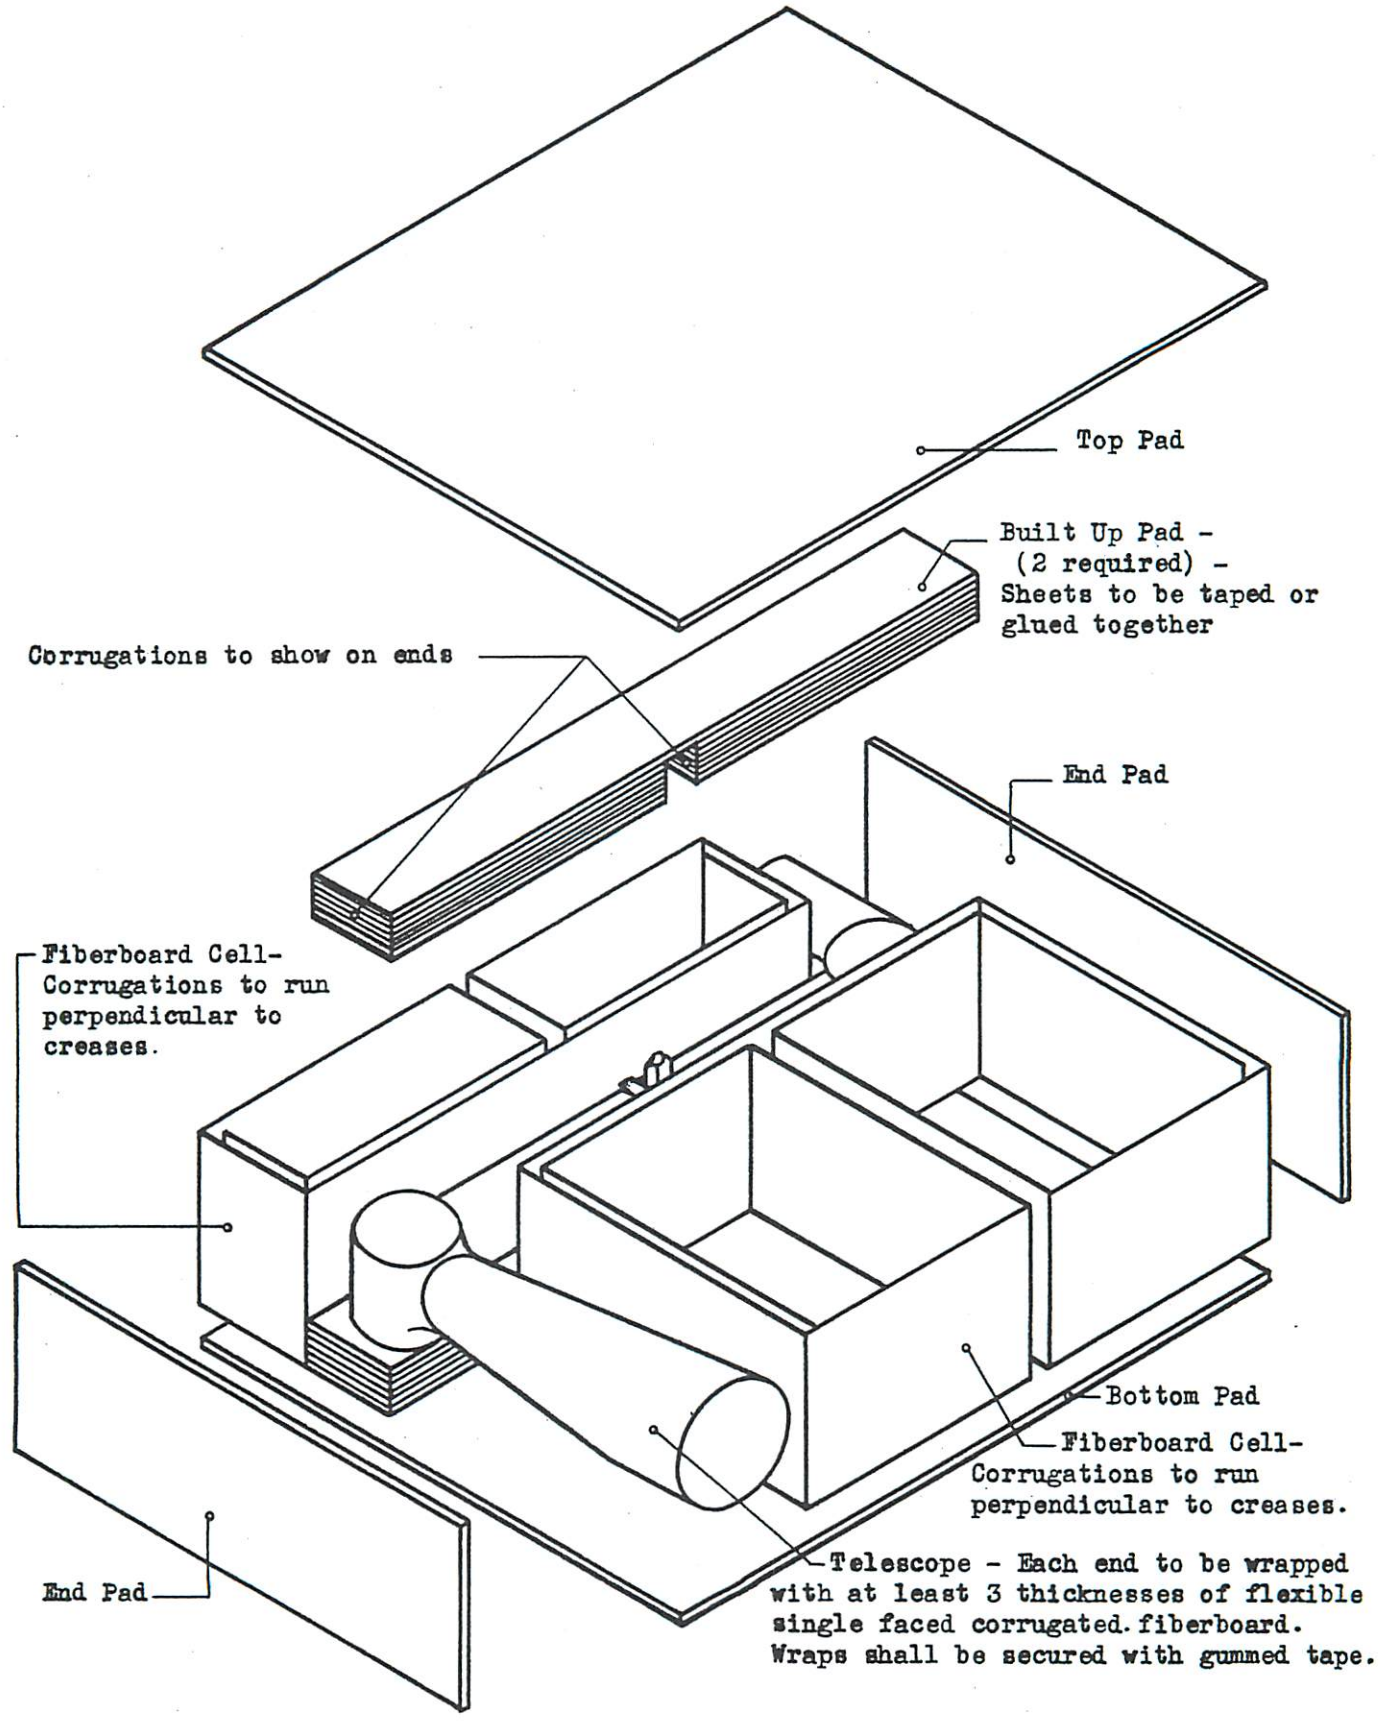


Figure 1
IMMOBILIZING OF TELESCOPE - PARTIAL EXPLODED VIEW

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:09Z
Check the source to verify that this is the current version before use.