MIL-S-11863C
26 June 1968
SUPERSEDING
MIL-S-11863B
10 May 1965

MILITARY SPECIFICATION

SAWMILL, CIRCULAR: TRAILER-MOUNTED, 50-INCH

BLADE, DIESEL-ENGINE-DRIVEN

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a mobile, diesel-engine-driven, trailer-mounted sawmill for use in producing rough timber in support of construction and maintenance of military bridges and other heavy construction projects.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

L-P-378	- Plastic Sheet and Strip (Polyolefin).
T-R-605	- Rope, Manila and Sisal.
QQ-S-634	- Steel, Bar, Carbon, Cold Finished, (Standard Quality).
QQ-S-781	- Steel, Strapping, Flat.
QQ-S-790	- Steel, Strapping, Round (Bare and Zinc-Coated).
RR-W-410	- Wire Rope and Strand.
TT-P-664	- Primer Coating, Synthetic, Rust-Inhibiting, Lacquer-Resisting.
UU-T-81	- Tags, Shipping and Stock.
ZZ-B-206	- Belting, Flat; Conveyor, Rubber.
ZZ-R-765	- Rubber, Silicone: Low- and High-Temperature and Tear Resistant.

FSC 3210

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

KKK-L-370 - Lining, Friction, (Clutch and Brake; Metallic, Metal-Ceramic and Semimetallic).
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Fiberboard.
PPP-C-650 - Crates, Wood, Open and Covered.
PPP-T-60 - Tape: Pressure-Sensitive Adhesive, Waterproof, for Packaging.

Military

MIL-C-104 - Crates, Wood; Lumber and Plywood Sheathed, Nailed and Bolted.
MIL-P-116 - Preservation, Methods of.
MIL-B-121 - Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-V-173 - Varnish, Moisture-and-Fungus-Resistant, (for the Treatment of Communications, Electronic and Associated Electrical Equipment).
MIL-P-514 - Plates, Identification, Instruction and Marking, Blank.
MIL-T-704 - Treatment and Painting of Materiel.
MIL-F-3541 - Fittings, Lubrication.
MIL-C-3774 - Crates, Wood; Open, 12,000- and 16,000-Pound Capacity.
MIL-G-3859 - Grease Guns, Hand, High-Pressure, Lever Operated; Cartridge and Bulk Loading (14 Ounce and 21 Ounce Capacity).
MIL-E-10062 - Engines: Preparation for Shipment and Storage of.
MIL-G-10924 - Grease, Automotive and Artillery.
MIL-E-11276 - Engines, Diesel: Industrial, Medium- and High-Speed, General Specification for.
MIL-H-1[illegible]4 - Hand Tools; Packaging of.
MIL-G-23827 - Grease, Aircraft and Instrument, Gear and Actuator Screw.
MIL-A-52363 - Air Cleaners, Intake: Dry-Type (for Internal-Combustion Engine).

STANDARDS

Federal

FED. STD. No. 595 - Colors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of U. S. Military Property.
MIL-STD-281	- Automobiles, Trucks, Truck-Tractors, Trailers and Trailer Dollies; Preservation and Packaging of.
MIL-STD-461	- Electromagnetic Interference Characteristics Requirements for Equipment.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.
MIL-STD-1400	- Engines, Gasoline or Diesel, Methods of Test.
MS35000	- Battery, Storage, Lead-Acid, Waterproof.
MS35388	- Tire, Pneumatic: Passenger Car, Light Truck, Truck and Bus.
MS35392	- Inner Tube: Pneumatic Tire.
MS35643	- Gasket: Synthetic Rubber, Cap, Fuel Tank.
MS35644	- Filler Neck Assembly, Fuel Tank - Military Vehicles.
MS35645	- Cap, Fuel Tank: Tactical Vehicle, Fording.
MS35773	- Radiators, Engine Cooling, Industrial.
MS35844	- Plug, Machine Thread, Magnetic: Drain.
MS51339	- Coupler, Drawbar, Ring-Offset.
MS53044	- Wheel, Pneumatic Tire - Disk Type, with Ring, for Tactical Wheeled Vehicles.
MS53063	- Indicator, Air Cleaner, Intake; Restriction Mechanical Type.
MS75058	- Connector, Receptacle, Electrical-Slave, 2 Contact, 24 Volt, Waterproof.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, Illinois, 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

AMERICAN TRUCKING ASSOCIATIONS, INC.

National Motor Freight Classification Rules.

(Application for copies should be addressed to the American Trucking Associations, Inc., 1616 P Street NW, Washington, D. C. 20036.)

RUBBER MANUFACTURER'S ASSOCIATION

Engineering Standards for Multiple V-Belt Drives.
Engineering Standard for Endless Flat Cord Belts.

(Application for copies should be addressed to the Rubber Manufacturer's Association, 444 Madison Avenue, New York, N. Y. 10022.)

SOCIETY OF AUTOMOTIVE ENGINEERS

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, Two Pennsylvania Plaza, New York, N. Y. 10001.)

DEPARTMENT OF TRANSPORTATION

ICC Motor Carrier Safety Regulations.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

3. REQUIREMENTS

3.1 Description. The mobile sawmill shall consist of a sawmill unit and a power unit. The sawmill unit shall withstand towing at speeds of 15 to 20 miles per hour (mph) over gravel roads without breakage or permanent deformation of any part or component.

3.1.1 Capacity. The sawmill shall saw logs up to 30 inches in diameter and 20 feet in length and shall produce not less than 1,000 feet board measure (fbm) of 1-inch plus or minus 1/32-inch cants per hour from No. 1 green oak logs 14 to 24 inches in diameter. This production rate shall be achieved when employing not more than five men.

3.1.2 Assembly and disassembly time. The sawmill shall be assembled from the transport position without welding in not more than 1 hour by five men. The sawmill shall be disassembled without any members being cut, and shall be ready for transport in 1/2 hour using five men.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

3.1.3 Dimensions and weight. The dimensions and weight of the sawmill unit shall be as shown in table I and of the power unit as shown in table II.

Table I. Sawmill Unit Minimum Dimensions and Weight

Overall length	34 feet
Overall width of carriage	2.5 feet
Weight	5,000 pounds
Ground clearance	16 inches

Table II. Power Unit Maximum Dimensions and Weight

Overall length	6 feet
Overall width	6-1/2 feet
Overall height	5-1/2 feet
Weight	4,000 pounds

3.1.3.1 Transportability. The overall dimensions of the sawmill unit in transport position shall meet the Berne International requirements (see figure 1). Maximum width of sawmill unit for highway transportability shall not exceed 96 inches.

3.2 Preproduction model. The supplier shall furnish a sawmill for examination and test within the time frame specified to prove, prior to starting production, that his production methods and choice of design detail will produce sawmills that comply with the requirements of this specification (see 6.3). Examination and tests shall be those specified herein.

3.3 Initial production. When specified the supplier shall furnish to the Government one or more sawmills for testing as specified in 4.4.

3.4 Material. Material shall be as specified herein. Material not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.5 Safety. All exposed parts that are subject to high operating temperatures or that are energized electrically shall be insulated, fully enclosed, or guarded. All moving parts, except the head saw drive belt and conveyor chain, that are of such nature or so located as to be a hazard to operating or maintenance personnel shall be enclosed or guarded. Protective devices shall not impair the operating functions. A clear, nonbreakable, nonfading, plastic shield or screen shall be provided to protect the sawyer from debris thrown by the head saw. The shield shall be hinged so as to allow 30-inch-diameter logs to be sawed. Working space shall be provided for operating personnel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

3.6 Ease of maintenance. All major assemblies and installed attachments shall be accessible for maintenance, repair, and replacement. Covers or plates which must be removed for component adjustment, repair, replacement, or maintenance shall be equipped with quick-disconnect fastenings. The accessories and subassemblies shall be suitable for installation with common tools associated with items of this nature. Ease-of-maintenance provisions shall incorporate, to the maximum practicable extent, features insuring operating clearances and facilitating applicable maintenance and servicing operations. All subassemblies shall be plainly matchmarked for ease of assembly and for adjustment.

3.7 Power unit. The power unit shall be an independent and self-contained unit consisting of a skid frame, diesel engine, reduction drive, and drive pulley.

3.7.1 Skid frame. The frame shall be all welded steel construction with runners of structural steel I-beams or channels reinforced by cross members. Each of the main skid members shall have the web cut back and the flanges welded at the ends forming a rounded surface. The frame shall be furnished with towing attachments that shall also serve as lifting attachments as specified in 3.13. When being pulled over rough terrain the frame supporting the engine and reduction drive shall not snub, break, nor shall there be any permanent deformation to the frame, engine, or drive.

3.7.2 Engine. Unless otherwise specified the diesel engine, including all systems, components, accessories, and auxiliaries shall conform to MIL-E-11276.

3.7.2.1 Power and speed rating. The power and speed rating of each engine shall be such that operation of the sawmill under any of the operational requirements and conditions specified herein will not require horsepower in excess of the continuous horsepower rating of the engine at 1,800 rpm as established by the Qualified Products List, QPL-11276. The maximum engine torque at rated governed speed shall not exceed 90 percent of the peak engine torque available at a lower speed as determined by test method series 2000 of MIL-STD-1400 (see 4.6.1).

3.7.2.2 Fuel tank. A fuel tank conforming to MIL-E-11276 shall be furnished. The tank shall be furnished with a gasket, filler neck, and filler neck cap conforming to MS35643, MS35644 and MS35645 respectively. The tank shall have a minimum capacity sufficient for at least 8 hours operation under any operating condition specified herein. Fuel capacity shall be based on 85 percent of fuel consumption rate obtained during conduct of tests in test method series 2000 of MIL-STD-1400 at applicable horsepower and governed speed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

3.7.2.3 Cranking system. A 24-volt cranking system and an 18-ampere battery charging system in accordance with MIL-E-11276 shall be furnished.

3.7.2.4 Instrumentation. An instrument panel with all instruments as specified in MIL-E-11276 shall be furnished. The fuel tank gauge may be located on the fuel tank.

3.7.2.5 Clutch and clutch controls. The engine shall be equipped with an overcenter clutch which shall be accessible for lubrication, adjustment, and replacement of parts. The clutch shall withstand without deformation or damage, repeated engagement under full load when tested as specified in 4.6.3.3 and 4.6.3.9. The lining shall conform to KKK-L-370, type II, and shall be installed in accordance with the lining manufacturer's instructions. Clutch control shall be accessible from the operator's platform. Clutch capacity shall be not less than 150 percent of maximum engine torque.

3.7.2.6 Engine housing. Each engine shall be equipped with a housing in accordance with MIL-E-11276. Weathertight seals shall be provided for operating doors and panels of the housing body. Material for the seals shall conform to ZZ-R-765, class Ia or Ib, grade optional, and shall be covered with nylon or other suitable material with a securing lip. Seals shall be riveted to the doors, panels, or housing after reinforcing with backup strips to prevent the rivet heads from pulling through the securing lip.

3.7.2.7 Control system. All control systems as specified in MIL-E-11276 shall be furnished. All controls shall be of the warning light type, except the overspeed control which shall be of the engine-shut-off type.

3.7.2.8 Cooling system. A complete cooling system in accordance with MIL-E-11276 shall be furnished. The radiator shall conform to MS37773.

3.7.2.9 Air cleaner. The air cleaner shall be of the dry type conforming to MIL-A-52363, class III. A rain cap shall be furnished. The air cleaner shall be provided with a restriction indicator conforming to MS53063-3.

3.7.2.10 Emergency starting and charging receptacle and cable. A slave receptacle conforming to MS75058 shall be provided to facilitate electrical connections between the batteries and external electrical power source for emergency starting of the engine and charging of the batteries. The receptacle shall be connected into the battery circuit and shall be installed as near as practicable to the batteries.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

3.7.2.11 Storage batteries. Batteries conforming to MS35000 shall be furnished. The batteries shall be of a size and number to provide sufficient capacity to meet the electrical requirements of the sawmill. The batteries shall be charged and dry. One filling of electrolyte of the required specific gravity shall be shipped with each battery.

3.7.2.12 Battery box. A weatherproof box made of steel not less than 0.071 inch thick shall be provided for the batteries. Vents shall be provided near the top of the box and drains shall be provided in the bottom. The box shall be equipped with built-in battery restraints constructed so that downward pressure will be applied to the outer battery case only. When the batteries are installed in the box and with all electrical connections completed, and with the battery box lid in the closed position, there shall be no uninsulated electrical conductor within 1 inch of any point within the battery box at which an electrical potential exists. The box shall be located so that the batteries will be accessible for routine maintenance, removal, and replacement. The battery electrolyte level shall be visible when the battery filler caps are removed. The batteries shall be accessible for servicing with battery servicing aids, such as a hydrometer and a syringe. Grommets shall be provided to protect the battery lead cables. All interior surfaces of the box shall be treated with acid-resistant paint.

3.8 Sawmill unit. The sawmill unit shall consist essentially of a trailer frame, carriage track, carriage, mandrel assembly, head saw, and sawdust removal system.

3.8.1 Frame. The sawmill unit frame shall be of tubular or channel steel construction. The frame shall be mounted on a single axle. When an outboard saw mandrel bearing is furnished the frame support may be detachable.

3.8.2 Leveling jacks. The sawmill unit shall be furnished with not less than six permanently attached leveling-screw-type jacks. Each jack shall have a lift height of not less than 12 inches. Lateral and transverse diagonal braces shall be furnished.

3.8.3 Wheels. Wheels shall conform to MS53044-5, size 20 X 7.50.

3.8.4 Tires. Tires shall conform to MS35388-16, size 9.00 X 20, 8 ply.

3.8.5 Inner tubes. Tubes shall conform to MS35392-13.

3.8.6 Drawbar. The drawbar shall be a steel tongue rigidly secured to the frame and furnished with a drawbar coupler conforming to MS51339-1 or -2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

The lunette coupler shall be centered, and with the sawmill unit in traveling position, the coupler shall be not less than 32 inches nor more than 34 inches from the ground. Two safety chains with grabhooks shall be furnished and shall be of sufficient length to extend 36 to 42 inches beyond the lunette eye. The chains shall conform to ICC regulations and to SAE J697.

3.8.7 Mandrel assembly. The head-saw mandrel shall be made of steel conforming to QQ-S-634, c1019, or c1045 normalized and cold-finished. The mandrel shall be not less than 2-1/4 nor more than 2-1/2 inches in diameter and not less than 48 nor more than 72 inches in length. The mandrel shall be supported by two double-row, self-alining, antifriction bearings. The bearings shall be setscrew adjustable on sliding-base mountings. The head saw shall be mounted on the mandrel between steel companion collars. One collar shall be fixed to the mandrel and the other shall be of the slip-on type, backed and tightened by a nut on the threaded end of the mandrel. Each collar shall be drilled for not less than two removable dowel pins of 9/16- to 5/8-inch diameter on 3-inch centers, to center and secure the blade. The collars shall be not less than 5 inches in diameter and shall be not less than 1-1/2 inches thick.

3.8.7.1 Splitter knife. The husk shall be provided with a splitter knife and a spring-loaded lumber turndown.

3.8.8 Head saw. The head saw shall be the inserted-tooth type, of not less than 50-inch diameter, 7 to 8 gage, tensioned to operate at 500 rpm. The saw shall be of alloy steel containing a minimum of 2-1/2 percent nickel or 0.75 percent molybdenum-manganese with a carbon content of at least 0.65 percent, and shall have a Rockwell hardness range of from C47 to C50.

3.8.9 Saw guide. A saw guide equipped with adjustable hardwood pins shall be furnished.

3.8.10 Carriage. The carriage shall be of steel and shall be supported and guided by not less than eight rollers. The rollers shall be equipped with permanently packed antifriction bearings. Cable drive rope shall be either sisal rope conforming to T-R-605, 1/2 inch diameter; or wire rope conforming to RR-W-410, type I, class 2, construction 1 or 2, 1/4 inch minimum, uncoated, regular lay. The carriage shall be not less than 14 feet long.

3.8.10.1 Head blocks. The carriage shall be equipped with not less than four head blocks. Each head block shall be equipped with dogs. The dogs shall be operated by independent levers. Each head block post shall be provided with a means to force the dogs into the log. In addition, each head block shall be equipped with a taper attachment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

3.8.10.2 Receder. The carriage shall be equipped with a hand-operated receder for retracting the head blocks.

3.8.10.3 Setting device. The setting device shall be mounted on the carriage frame to permit retracting the head blocks from 26 to 28 inches from the head saw. A scale visible to the sawyer shall be furnished to indicate the distance between the head blocks and the head saw. With one complete pull of the control lever, the setting device shall move the head blocks towards the head saw a distance of at least 2-1/4 inches. The setting device shall be equipped with an adjustable stop. With one complete pull of the lever, the stop shall permit the forward movement of the head blocks to preset distances of 1, 1-1/4, 1-1/2, 1-3/4, or 2 inches.

3.8.11 Feed works. Feed rate shall be not less than 4-1/2 inches and retraction shall be not less than 7 inches per saw revolution.

3.8.12 Sawdust removal system. The sawdust removal system shall be of the blower type capable of removing the sawdust to a distance of at least 25 feet from the mill. The system shall operate without a pit. The blower may be removable for transport.

3.8.13 Controls. The setting, receding, and carriage controls shall be accessible, and capable of being manipulated from the sawyer's station. An extension-type platform shall be furnished to allow working space for handling logs up to 30 inches in diameter and 20 feet in length. A safety lock or balancing weights shall be furnished to hold the carriage feed lever in neutral position. Where a safety lock is provided, the lock shall be interconnected with a brake or stop that will hold the carriage stationary when the feed lever is in the neutral position.

3.9 Vehicular electrical system. Unless otherwise specified the sawmill unit shall be equipped with a vehicular electrical system for legal highway operation. Lights and wiring shall be in accordance with ICC, Motor Carrier Safety Regulations and the SAE Handbook, "Electrical Equipment and Lighting" section. The lights shall be provided with shock and vibration protection through use of elastomer mounts to prolong filament life. Two rear combination stop, turn, and tail lights shall be furnished, and shall be of the 4-inch-diameter, flush-mount type having either a sealed unit mounted in an elastomer ring, or a bulb and lens mounted in an elastomer or nonmetallic housing. These lights shall be SAE-S-AI-T in accordance with SAE J759 for the correct electrical system voltage. Cable clamps, grommets, insulation, or loom, and commercial thin-wall conduit shall prevent whipping, chafing, or any other mechanical damage to the wires. Wires shall be routed within the protection of framing members. Splices shall be waterproofed with insulation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

All wires and harnesses shall be installed to facilitate defective wire replacement from bulk supply. All wires shall be coded as to the circuit. Reflectors shall be furnished and mounted as required by ICC regulations. The electrical system shall have a 24-volt potential.

3.10 Fungus and moisture resistance. The electrical circuitry, including all components and connections except as specified below, shall be protected from the effects of fungus growth and moisture by an overall treatment with a varnish conforming to MIL-V-173, except that 1 percent copper-8-quinolinolate (by weight) based on the nonvolatile content of the varnish shall be used in lieu of salicylanilide, the specified fungitoxicant:

(a) Components or circuit elements that are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.
(b) Components or circuit elements whose functions will be adversely affected by the varnish coating shall not be treated.

When used, the varnish shall be applied by spray, brush, or a combination of both to give a minimum dry-film thickness of 1 mil to component or element surfaces previously cleaned and prepared so that the surfaces are free from all foreign matter which would interfere with the adherence or function of the varnish.

3.11 Drive belts. V-belts shall be in accordance with Rubber Manufacturer's Association "Engineering Standards for Multiple V-belt Drives." Flat drive belts shall be natural rubber conforming to ZZ-B-206 or heavy duty endless cord belting in accordance with RMA "Engineering Standard for Endless Flat Cord Belts."

3.12 Toolbox. The power unit shall be provided with a toolbox made of metal not less than 0.071 inch in thickness. The toolbox shall have an overlapping hinged lid or door which prevents the entry of rain and dirt, not less than two tension latches, and a hasp for locking with a padlock having a 3/8-inch shackle. The toolbox shall be of a size to hold all of the maintenance tools (see 3.22). The toolbox shall be securely mounted in a protected location. The lid or door shall open at least 90 degrees from the closed position, and shall remain in the full opened position by weight of the lid or by a holding device. Provisions shall be made to completely drain the toolbox.

3.13 Lifting attachments. Permanently affixed attachments shall be provided for each unit that will enable the unit to be lifted in its normal traveling or operating position. Each attachment shall withstand, without damage to any part of the unit, 2-1/2 times the resultant vectorial force imposed when the individual unit is suspended by the lifting attachments.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

Attachments for multiple slings shall be located so that slings will converge at a point not more than 19 feet above the lowest extremity of the unit, and not less than 1-inch clearance will be maintained between the slings and the unit. The inside diameter of the attachment eye shall be not less than 3 inches. Lifting attachments may be used for tiedowns providing they meet the requirements specified in 3.14.

3.14 Tiedown attachments. Permanently affixed attachments shall be provided that permit fastening the units to the floor or deck of a transportation medium. Each attachment shall withstand, without damage to the unit, its proportion of the following static loads: 8-G forward, 8-G rearward, 2-1/4-G upward, 1-1/2-G sideward, where G equals cargo weight. All edges of the attachments shall be rounded or beveled. Tiedowns may be used for lifting providing they meet the requirements specified in 3.13.

3.15 Electromagnetic interference. The electromagnetic interference emission characteristics of the sawmill shall conform to MIL-STD-461, class III C.

3.16 Lubrication. All surfaces requiring lubrication shall be provided with a means for lubricating.

3.16.1 Lubricants. The sawmill shall operate as specified herein when lubricated with military lubricants (see 6.4).

3.16.2 Lubrication fittings. Lubrication fittings shall conform to MIL-F-3541, type I, II or III. Fittings shall be located in a protected position and shall be accessible to a grease gun conforming to MIL-G-3859. Accessibility to fittings shall be provided without the removal or adjustment of accessories or parts. Panels and plates equipped with hand-operable, quick-disconnect fasteners may be removed to provide accessibility to lubrication fittings.

3.16.3 Pressure-release device. A pressure-release device shall be provided where pressure lubricating equipment will damage grease seals or other parts.

3.16.4 Enclosures with integral reservoir of lubricant. Enclosures such as gear cases and transmission housings shall be equipped with dipsticks, check plugs not less than 1/2-inch pipe size, or sight gages to determine the level of the lubricant. Each enclosure shall be equipped with a means for filling the enclosure with lubricant and for draining. The drain shall be fitted with a magnetic drain plug, size conforming to MS35844. The drain shall be located so that removal of the plug will result in complete drainage of the lubricant from the enclosure. Drainage shall be to the ground when the sawmill is in its normal position. Integral tubes or troughs may be used to convey the lubricant from the drain to the ground.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

3.16.5 Initial delivery lubrication service. All grease lubrication, including lubrication of sealed bearings, shall be with greases as follows:

(a) MIL-G-23827 for instruments, all sealed bearings, and other bearings where operating temperatures do not exceed 250° F.
(b) MIL-G-10924 for bearings where operating temperatures do not exceed 175° F.

The sawmill shall be assembled, run-in, tested, and delivered with these greases. The bearings shall be cleaned before lubrication because military greases are not always compatible with other greases. Each sawmill shall be tagged in a conspicuous place to indicate which military grease has been used.

3.16.6 Oil lubrication. Unless otherwise preserved for packaging (see 5.2), all components shall be filled to the operating level with grades of military oils designated for use in the temperature range as specified. Each sawmill shall be tagged in a conspicuous place to indicate the temperature range and grade of lubricants used.

3.17 Identification marking. The sawmill shall be identified in accordance with MIL-STD-130. Identification plates shall conform to MIL-P-514, type I, style 3, composition C of type I, grade A, class 1 material. Transportation data plates in accordance with MIL-P-514, type III, composition C of type I, grade A, class 1 material shall be furnished and shall indicate the location and capacity of the lifting and tiedown attachments.

3.18 Control identification, information, safety, and warning plates. A plate shall be furnished for each switch, gage, and control, and at points requiring special attention for safe and efficient operation of the sawmill. The plates shall be labeled by lettering or other appropriate marking with information such as function, the direction the control is to be moved, neutral position, safety instructions, and other warnings or instructions as necessary. The plates shall conform to MIL-P-514, type III, composition C, of type I, grade A, class 1 material. Plates that describe safety measures or plates that warn against operations detrimental to the sawmill shall be distinguished by the words "CAUTION" or "WARNING" in red lettering. The red shall be in accordance with FED. STD. No. 595, color number 31136.

3.19 Treatment and painting. All parts of the sawmill unit and its components normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, type A.

3.20 Stenciling. The gross weight of each sawmill shall be stenciled on each side of the sawmill unit in such a manner as to be discernible. Unless otherwise specified herein, stenciling shall be in accordance with MIL-T-704.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

3.21 Technical publications to accompany sawmill. Such technical publications as are specified shall be furnished.

3.22 Repair parts and maintenance tools. Such repair parts and maintenance tools as are specified shall be furnished.

3.23 Items to be furnished with each sawmill. No shipment of sawmills shall be made unless repair parts and maintenance tools are included with the shipment or unless approval for shipment of the sawmill without such items has been received from the contracting officer.

3.24 Workmanship. All parts, components, and assemblies of the sawmill, including castings, forgings, molded parts, stampings, bearings, seals, machined surfaces, and welded parts, shall be clean and free from sand, dirt, fins, pits, sprues, scale, flux, and other harmful extraneous material. All edges shall be rounded or beveled.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The supplier is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Initial production inspection (see 4.4).
(c) Quality conformance inspection (see 4.5).
(d) Inspection comparison (see 4.7).
(e) Inspection of preparation for delivery (see 4.8).

4.3 Preproduction inspection.

4.3.1 Examination. The sawmill shall be examined as specified in 4.6.2. Presence of one or more defects shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

4.3.2 Tests. The sawmill shall be tested as specified in 4.6.1 and 4.6.3 through 4.6.3.8. Failure of any test shall be cause for rejection.

4.4 Initial production inspection. An initial production sawmill(s) will be selected at random by the Government from the first five sawmills being produced from production tooling and will be examined as specified in 4.6.2 and tested as specified in 4.6.3 through 4.6.3.8 to determine conformance to the requirements of this specification. The inspection will be performed by the Government at a site selected by the Government. Acceptance of an initial production sawmill shall not exclude the remaining sawmills from the quality conformance inspection and acceptance provisions specified in section 4.

4.4.1 Inspection failure. Failure of an initial production sawmill to meet any requirement specified herein during and as a result of the examination and tests specified in 4.4 shall be cause for rejection of the initial production sawmill(s) and shall be cause for refusal by the Government to continue acceptance of sawmills until evidence has been provided by the supplier that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the supplier at no cost to the Government on sawmills previously accepted and produced under the contract. Any deficiencies found as a result of the initial production inspection will be considered prima facie evidence that all sawmills accepted prior to the completion of initial production inspection are similarly deficient unless evidence to the contrary is furnished by the supplier and such evidence is acceptable to the contracting officer.

4.5 Quality conformance inspection.

4.5.1 Examination. Each sawmill shall be examined for the defects specified in 4.6.2. Presence of one or more defects shall be cause for rejection.

4.5.2 Test. Each sawmill, except the preproduction model and the initial production sawmill(s), shall be tested as specified in 4.6.3.9. Failure of the test shall be cause for rejection.

4.6 Inspection procedure.

4.6.1 Engine performance. Prior to examination and tests of the sawmill, the engine that will be installed in the preproduction model shall be tested in accordance with Test Method Series 2000 of MIL-STD-1400. Nonconformance to 3.7.2.1 or failure to meet the requirements of Test Method Series 2000 of MIL-STD-1400, shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

4.6.2 Examination. The sawmill shall be examined for the following defects:

101. Assembly not complete or not correct.
102. Materials not as specified.
103. Dimensions and weights not as specified.
104. Safety devices not as specified.
105. Ease of maintenance not as specified.
106. Power unit not as specified.
107. Engine and accessories not as specified.
108. Sawmill unit not as specified.
109. Drive belts not in accordance with RMA Standards.
110. Toolbox not as specified.
111. Electromagnetic interference suppression components and network not identical with approved model.
112. Lubrication not as specified.
113. Identification marking, instruction plates, or technical publications missing.
114. Treatment and painting not as specified.
115. Stenciling of gross weight not as specified.
116. Workmanship not as specified.

4.6.3 Tests.

4.6.3.1 Test conditions (operating). Prior to test, the sawmill shall be lubricated with military oils and greases as specified in 3.16.5 and 3.16.6. Oils shall be those designated for use in the ambient temperature at which the test is being performed.

4.6.3.2 Roadability. Tow the sawmill unit over gravel roads for a distance of not less than 5 miles at speeds of 15 to 20 mph. Make at least three abrupt stops. Upon completion of the test, examine the unit. Breakage or permanent deformation of any part or failure of tiedowns to restrain the components of the sawmill unit shall constitute failure of this test.

4.6.3.3 Log sawing. The log-sawing test shall be conducted after the roadability test has been completed. Operate the sawmill with five men by cutting logs into boards for at least 20 cumulative hours, using logs of various sizes but including at least one log between 28 and 30 inches in diameter and 20 feet in length. Examine the sawmill to see that all parts function as required. Measure the distance that the sawdust is carried away from the saw. Examine the lumber manufactured for tolerances. Nonconformance to 3.1.1 or 3.8.12 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

4.6.3.4 Capacity. Operate the sawmill for 1 hour sawing 1-inch cants. Inability to saw 1,000 fbm in 1 hour shall constitute failure of this test.

4.6.3.5 Assembly and disassembly. Using not more than 5 men, assemble the sawmill from transport position. Operate the sawmill. Disassemble the sawmill and prepare it for transport. Inability to assemble the sawmill in 1 hour or disassemble and prepare for transport in 1/2 hour shall constitute failure of this test (see 3.1.2).

4.6.3.6 Saw speed. Check the rotational speed of the head saw with a tachometer with engine operating at governed speed. Inability of the head saw to operate at 500 rpm shall constitute failure of this test.

4.6.3.7 Electromagnetic interference. The preproduction model shall be tested to determine conformance with 3.15. The supplier shall furnish the contracting officer a report of tests required by MIL-STD-461. Disapproval of the report shall constitute failure of this test.

4.6.3.8 Tiedown and lifting attachments. The static load as specified in 3.13 for lifting attachments and 3.14 for tiedown attachments shall be applied to each attachment when mounted on its structural member. Weld failure or permanent deformation of the attachment or the structural member shall constitute failure of this test.

4.6.3.9 Operating. Set up the sawmill. Start power plant, bring to operating speed, and engage saw so that it rotates at rated speed. Allow the machinery to run for at least 1 hour. While the machinery is operating, load a log approximately 18 inches in diameter by 16 feet long on the carriage. Run the carriage up and down the track for at least 1 hour. Any breakage, permanent deformation, or malfunction of the sawmill shall constitute failure of this test.

4.7 Inspection comparison. The Government may select sawmills at any time during the contract production period and subject these sawmills to the examination specified in 4.6.2 and to the tests specified in 4.6.3 through 4.6.3.8 to determine that the quality of the selected sawmill is equal to the quality standards established during initial production inspection. The inspection will be performed by the Government at a site selected by the Government. Sawmills will be selected at random from those which have been accepted by the Government and will not include the previously inspected preproduction model and initial production sawmills.

4.7.1 Inspection failure. Failure of any sawmill when inspected as specified in 4.7 may be considered cause for refusal by the Government to continue acceptance of sawmills until objective evidence furnished by the supplier reveals that corrective action has been taken to eliminate the condition which caused the rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

4.8 Inspection of preparation for delivery.

4.8.1 Preproduction pack inspection.

4.8.1.1 Examination. Examine the preproduction pack for the defects specified in 4.8.2.3. Presence of one or more defects shall be cause for rejection.

4.8.1.2 Tests. The preproduction pack of crated components for level A or B shall be subjected to the railroad-car test as specified for guidance impact test in accordance with MIL-STD-1186, appendix A. The car shall strike a string of five empty cars with draft gear extended and the brakes set, at a speed of not less than 10 miles or more than 11 miles per hour. At the conclusion of the preproduction pack test, the pack shall be examined. Any shifting of contents, loosening or breaking of holddowns, ties, stays, blocking or bracing, or any visual damage to the components shall constitute failure of the preproduction pack and shall be cause for rejection.

4.8.2 Quality conformance inspection of pack.

4.8.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.8.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105, inspection level S-2.

4.8.2.3 Examination. Samples selected in accordance with 4.8.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

117.	Materials, methods, and containers not as specified for level A or B. Each incorrect material, method, or container shall be considered one defect.
118.	Cloth tags for matchmarking and lubrication information not waterproofed for level A.
119.	Unpainted exterior metal surfaces not coated with preservative for level A or B.
120.	Exposed exterior machined surfaces not coated with preservative, wrapped or covered with barrier material and barrier material secured as specified for level A or B.
121.	Engine and engine accessories not preserved in accordance with the referenced document.
122.	Clutch not preserved as specified for level A.
123.	V-belts not removed or released from tension for levels A or B.
124.	Head saw (circular saw) not preserved and packaged as specified for levels A or B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

125. Mandrel assembly not preserved and packaged as specified for levels A or B.
126. Trailer components not preserved and packaged in accordance with the referenced documents for levels A or B.
127. Maintenance tools not preserved and packaged in accordance with the referenced document for levels A or B.
128. Technical publications not preserved as specified.
129. Repair parts not preserved in accordance with the referenced document.
130. Intermediate packaging not as specified for levels A or B.
131. Packing not as specified for levels A or B.
132. Strapping not zinc coated for level A.
133. Blocking, bracing, and anchoring not in accordance with the referenced document for levels A or B.
134. Marking missing, illegible, incomplete, or incorrect.

5. PREPARATION FOR DELIVERY

5.1 Preproduction pack. The supplier shall furnish a preproduction pack for examination and test within the time frame specified to prove, prior to starting production packaging and packing, that the applied preservation, packaging, packing, and marking comply with the preparation for delivery requirements of this specification (see 6.5). Examination and tests shall be those specified herein.

5.2 Preservation and packaging. Preservation and packaging shall be level A, B, or C as specified.

5.2.1 Level A.

5.2.1.1 Disassembly. Disassembly of the trailer-mounted sawmill unit and the skid-mounted power unit shall be the minimum necessary to safeguard parts vulnerable to damage and loss and to remove protruding parts that increase cubage. Disassembly shall be in accordance with the supplier's recommendations and in accordance with the transportability requirements. Bolts, nuts, pins, and washers removed shall be reinstalled in one of the mating parts and secured to prevent their loss.

5.2.1.2 Matchmarking. When necessary to facilitate reassembly, detached components shall have matchmarking information on cloth tags conforming to UU-T-81, type A, or on metal tags. Cloth tags shall be waterproofed in accordance with MIL-STD-129. The tags shall be securely attached to the components so as to prevent damage to the preservation or to the components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

5.2.1.3 Preservatives. Preservatives specified herein shall conform to the applicable specification listed in and shall be applied in accordance with MIL-P-116.

5.2.1.4 Unprotected surfaces. Unpainted exterior metal surfaces of components and assemblies such as clevises, clamps, rods, bolts and nuts, exposed gears, headblocks, bearing collars, carriage, carriage controls, chain conveyor, clamps, dogs, feedworks, frame, levers, receder mechanism, rings, rollers, sprocket stops, safety lock, and leveling jacks or any other similar unpainted exterior metal surface not specified herein requiring the application of a preservative in accordance with MIL-P-116 shall be coated with type P-1 preservative.

5.2.1.5 Engine. The engine and engine accessories shall be preserved in accordance with MIL-E-10062, level A. The clutch cover plate shall be removed and all accessible metal surfaces sprayed with primer as specified in MIL-E-10062.

5.2.1.6 Drive belts and pulleys.

5.2.1.6.1 Flat belt. Drive belts shall be compactly rolled and the roll secured with cotton tape or twine.

5.2.1.6.2 V-belts. V-belts shall be removed or released from tension. Removed belts shall be individually preserved in accordance with MIL-P-116, method IC-1.

5.2.1.6.3 Pulleys. The unpainted faces of belt pulleys shall be coated with primer conforming to TT-P-664.

5.2.1.7 Plastic shield or screen. The plastic shield or screen, if removed shall be preserved in accordance with MIL-P-116, method III, using a close-fitting box conforming to PPP-B-636, W5c.

5.2.1.8 Head saw (circular saw). The head saw shall be coated with type P-1 preservative and wrapped with barrier material conforming to MIL-B-121, type I, grade A, class 2, secured with tape conforming to PPP-T-60, type I. The wrapped saw shall be protected on each side with 1/4-inch-thick plywood, hardboard, or particle board which shall extend to not less than 1/4 inch beyond the perimeter of the saw. The saw shall be secured within the protector in a manner to prevent movement.

5.2.1.9 Mandrel assembly. Antifriction bearings which are not removed from the sawmill and the machined surfaces of mandrels and shafts shall be coated with type P-6 preservative and wrapped or covered with barrier material conforming to MIL-B-121, type I, grade A, class 2, secured with tape conforming to PPP-T-60, type I. Bearings removed from the sawmill shall be preserved in accordance with MIL-P-116, method IC-1, coating the bearings with type P-6 preservative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

5.2.1.10 Sisal rope. Sisal rope shall be removed and coiled or hanked. If coiled, the coil shall be secured with ties of cotton tape or twine.

5.2.1.11 Wire rope. Wire rope shall be removed and coated with type P-1 preservative. The rope shall be coiled and the coils secured with soft, annealed wire ties.

5.2.1.12 Trailer components. Trailer components shall be preserved and packaged in accordance with MIL-STD-281, level A (boxed or mobile) as applicable (see 5.3.1.2).

5.2.1.13 Maintenance tools. Maintenance tools shall be preserved and packaged in accordance with MIL-H-15424, level A, and placed in the toolbox.

5.2.1.14 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, method IC-1, and placed in the toolbox.

5.2.1.15 Repair parts. The preservative application criteria and applicable method(s) of preservation of MIL-P-116 shall be used to preserve repair parts. The preserved repair parts shall be placed in the toolbox if sufficient space is available or the parts shall be intermediate packaged as specified in 5.2.1.16.

5.2.1.16 Intermediate packaging. Packaged and unpackaged components shall be secured to the base of the crate specified in 5.3, secured to the unit for which intended (power unit or sawmill unit), or intermediate packaged in close-fitting boxes conforming to PPP-B-621, class 1, style optional or PPP-B-601, domestic type, style optional. Boxes shall not require strapping. Securing of components to the crate base or to the unit shall be with strapping conforming to QQ-S-781 or QQ-S-790.

5.2.2 Level B. Each complete sawmill shall be preserved and packaged as specified in 5.2.1 for level A with the following exceptions.

5.2.2.1 Matchmarking. Cloth matchmarking tags are not required to be waterproofed.

5.2.2.2 Plastic shield or screen. The plastic shield or screen, if removed, shall be preserved in accordance with MIL-P-116, method III, using a box conforming to PPP-B-636, type CF, class domestic, variety and grade as applicable.

5.2.2.3 V-belts. Removed V-belts shall not require preservation but shall be secured to the sawmill close to the pulley for which intended.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

5.2.3 Level C.

5.2.3.1 Disassembly. Disassembly shall be as specified in 5.2.1.1 for level A.

5.2.3.2 Engine. The engine, including the liquid cooling system, shall be preserved in accordance with MIL-E-10062, level C.

5.2.3.3 Repair parts, maintenance tools, and technical publications. Repair parts and technical publications shall be preserved and packaged as specified for level A. Maintenance tools shall not require preservation and packaging but shall be placed in the toolbox.

5.2.3.4 Other components. Preservation and packaging of other components of the sawmill not specifically mentioned herein shall be limited to that protection deemed necessary by the supplier to provide protection against deterioration and damage from the supplier to the initial destination.

5.3 Packing. Packing shall be level A, B, or C as specified.

5.3.1 Level A.

5.3.1.1 Power unit. The components comprising the power unit shall be packed in a crate conforming to MIL-C-104, type I, class 1 or 2, style a. The contents shall be blocked, braced, and anchored in accordance with the appendix to the crate specification.

5.3.1.2 Sawmill unit. Unless otherwise specified herein each sawmill unit in transport position shall be prepared for unboxed (mobile) shipment. Intermediate packaged and unpackaged components or sections shall be securely fastened to the basic unit so as not to interfere with lifting the unit or with its mobility. The securing shall be done by zinc-coated steel strapping conforming to QQ-S-781 or QQ-S-790, type and size as applicable, or with bolts as required. When specified each complete sawmill unit shall be packed in a crate conforming to MIL-C-3774, type II. The contents shall be blocked, braced, anchored, and protected with a shroud in accordance with the appendix to the crate specification, except the shroud shall be fabricated of black polyethylene film conforming to L-P-378, type I, class 1, grade A, finish 1, .0060 inches thick.

5.3.2 Level B.

5.3.2.1 Power unit. The components comprising the power unit shall be packed in an open crate conforming to PPP-C-650, type V, style B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

5.3.2.2 Sawmill unit. Each sawmill unit shall be prepared for unboxed (mobile) shipment. Intermediate packaged and unpackaged components or sections shall be securely fastened to the basic unit so as not to interfere with lifting the unit or with its mobility. The securing shall be done by zinc-coated steel strapping conforming to QQ-S-781 or QQ-S-790, type and size as applicable, or with bolts as required.

5.3.3 Level C. Each complete sawmill shall be packed to assure carrier acceptance and safe delivery to destination at lowest rating in compliance with Uniform Freight Classification Rules or National Motor Freight Classification Rules.

5.4 Depreservation guide. A depreservation guide shall be prepared for the power unit. Place the guide in a waterproof envelope marked "Depreservation Guide" and secure in a conspicuous location on the power unit. Unless otherwise specified DA Form 2258 - Depreservation Guide for Vehicles and Equipment shall be used (see 6.6).

5.5 Marking. Packages, shipping containers, or unboxed units shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The mobile sawmills are intended for use in producing rough lumber in support of general construction.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of the preproduction model (see 3.2).
(c) When initial production inspection is required and number of sawmills to be furnished when applicable (see 3.3).
(d) When engine will be other than as specified (see 3.7.2).
(e) When vehicular electrical system will be other than specified (see 3.9).
(f) Grade of military oils required to service sawmill (see 3.16.6).
(g) Technical publications required (see 3.21).
(h) Applicable list of repair parts and maintenance tools (see 3.22).
(i) Time frame required for submission of the preproduction pack (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

(j) Level of preservation and packaging and level of packing required (see 5.2 and 5.3). Level B preservation and packaging is intended to provide economical but limited protection and should be specified only when it is determined the sawmill will be held in covered storage.
(k) When sawmills are to be crated (see 5.3.1.2).
(l) When other than DA Form 2258 is to be used (see 5.4).

6.3 Preproduction model. Any changes or deviations of production sawmills from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the supplier of his obligation to furnish sawmills conforming to this specification.

6.4 Lubricants. The contracting officer should furnish a list of military lubricants applicable to the sawmill covered by this specification as contained in the Federal Supply Catalog, DOD Section, Identification List C9100-IL for FSC Group 91.

6.5 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the supplier of his obligation to preserve, package, pack, and mark the sawmills in accordance with this specification.

6.6 DA Form 2258. The contracting officer shall arrange to furnish DA Form 2258 when requested by the supplier.

Custodians:

Army - ME
Navy - MC

Review interest:

Army - EL

User interest:


Navy - YD

Preparing activity:

Army - ME

Project No. 3210-0003

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

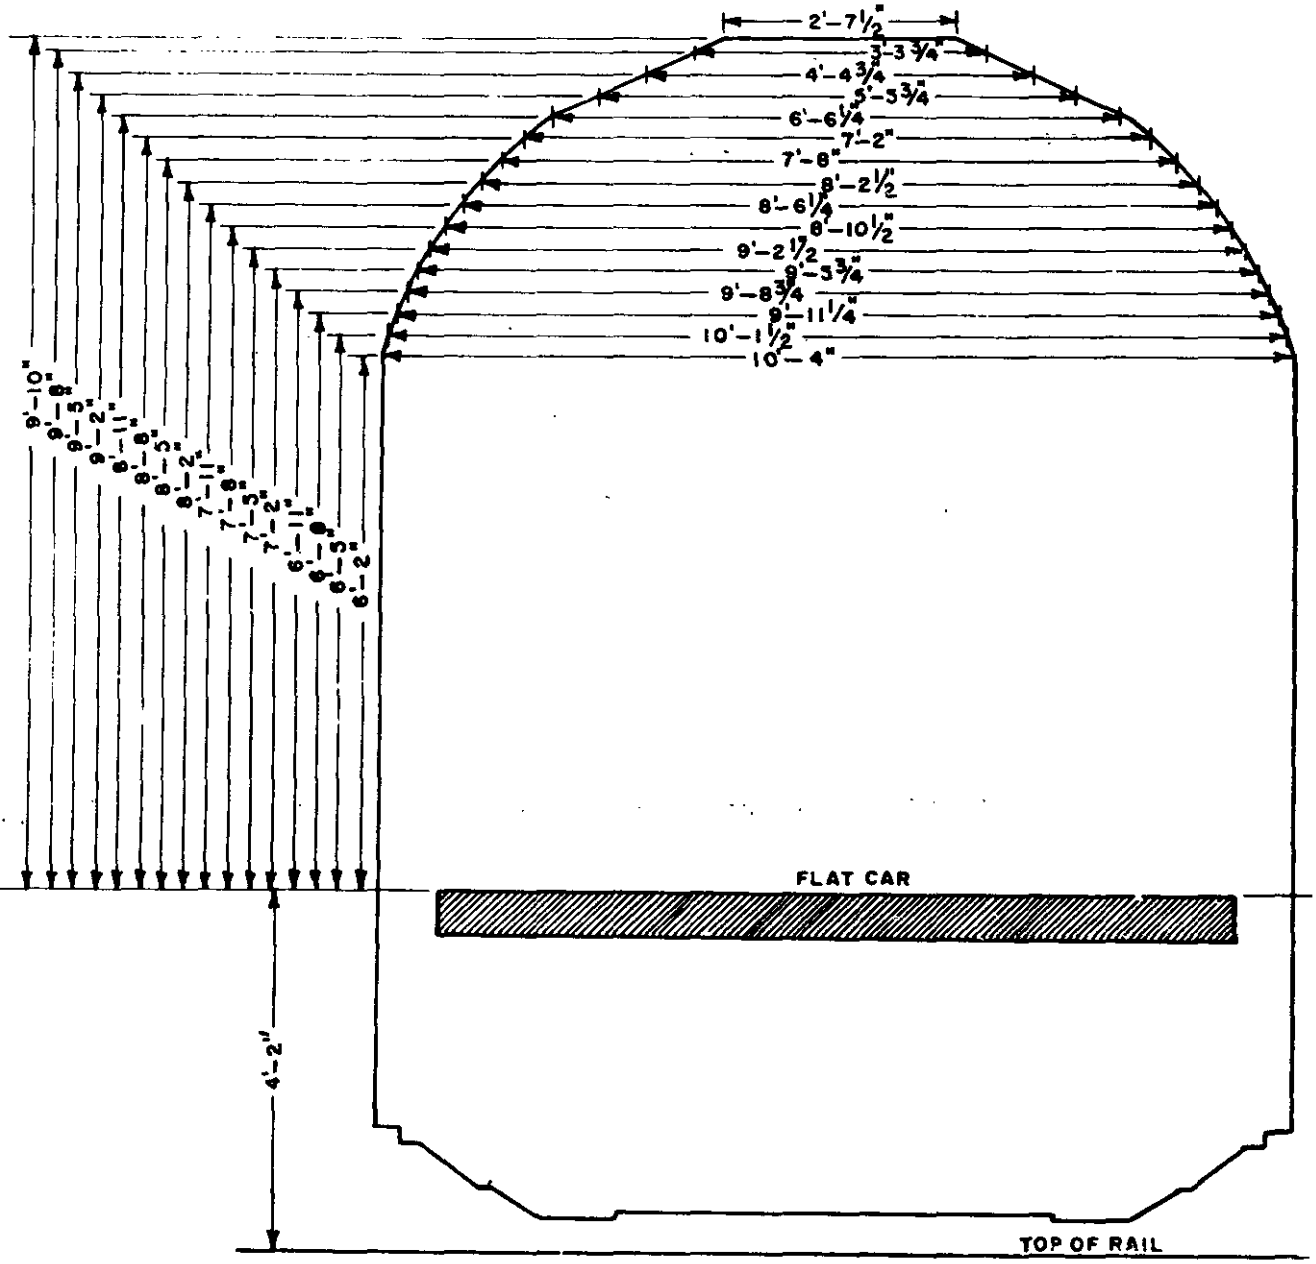

ITEM LENGTH - 32'-10"

Figure 1 BERNE INTERNATIONAL (CLEARANCE DIAGRAM) A13123-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-S-11863C Sawmill, Circular: Trailer-Mounted, 50-Inch Blade, Diesel-Engine-Driven

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:04Z
Check the source to verify that this is the current version before use.