MIL-S-11874D(IH)
31 December 1982
SUPERSEDING
MIL-S-11874C(IH)
30 June 1974

MILITARY SPECIFICATION

SHOULDER CORD, INFANTRY, BLUE

This specification is approved for use by The Institute of Heraldry, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defesne.

1. SCOPE

1.1 This specification covers one type of shoulder cord either nylon or rayon.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bid or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276 - Thread, Cotton
PPP-B-636 - Box, Shipping, Fiberboard
PPP-B-676 - Boxes, Setup

STANDARDS

FEDERAL

FED-STD-191 - Textile, Test Methods

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWINGS

THE INSTITUTE OF HERALDRY

B-10-10 - Cord, Shoulder, Infantry

(Miniature copy of drawing B-10-10, identified as figure 1 is attached for information purposes only.)
(Copies of specifications, standards, and drawings required by the contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.--The following documents form a part of this specification to extent specified herein; unless otherwise indicated, the issue in effect on date of invitation for bid or request for proposal shall apply:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: Director, The Institute of Heraldry, US Army, Cameron Station, Alexandria, VA 22314, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

FSC 8455

THE COLOR ASSOCIATION OF THE UNITED STATES

DOD Standard Color Card of Official Standardized Shades for Sewing Thread 1968

DOD Standard Shades for Heraldic Yarns for Embroidery and Ribbons 1974

(Application for copies of the color card should be addressed to The Color Association of the United States, Inc., 24 East 38th Street, New York, NY 10016.)

3. REQUIREMENTS

3.1 Guide sample.--Unless otherwise specified (see 6.2), a guide sample shall be furnished for guidance and information only. In cases of conflict between the guide sample and the specification, the specification shall govern.

3.2 First article.--When specified (see 6.2), before production is commenced, a sample of the shoulder cord covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for inspection and tests as specified in 4.2. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all applicable provision of this specification. The first article shall be manufactured by the contractor in the same facilities to be used for the production items.

3.3 Material.--Materials shall conform to the referenced specifications and to the requirements specified herein.

3.3.1 Yarn.--

3.3.1.1 Cotton.--

3.3.1.1.1 Core.--The stuffer yarn for the core shall be 9/3 cotton or equivalent.

3.3.1.1.2 Cover.--The yarn for core cover shall be 20/2 cotton.

3.3.1.2 Rayon.--When rayon is used for the cord cover and the buttonhole cover the yarn shall be continuous filament, cellulose rayon of 600/1 denier having a minimum of 88 filaments.

3.3.1.3 Nylon.--When nylon is used for the cord cover and the buttonhole cover the yarn shall be continuous filament bright nylon of 210 denier, 2 ply or 420 denier having a minimum of 68 filaments.

3.3.2 Thread.--

3.3.2.1 Plaited cord.--Thread for stitching the plaited cord shall conform to type IA3, ticket 60, 3 ply of V-T-276.

3.3.2.2 Buttonhole cord.--The thread for stitching of the buttonhole loop to the plaited cord shall conform to type IC2, ticket C, 3 ply of V-T-276.

3.4 Color.--

3.4.1 Yarn.--All yarns, except the cotton stuffer yarns, shall be dyed Light Blue HU Cable 67120. The use of sulfur dyes and dyes containing elementary sulfur or compounds capable of oxidization to sulfuric acid is prohibited. When tested as specified in Test Method 2020, there shall be no stain showing on the filter paper. Cotton stuffer yarn shall be natural or bleached.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

3.4.1.1 Matching.--The color shall match the approved standard shade under natural (North Sky) daylight or artificial daylight having a color temperature of 7500 degrees kelvin.

3.4.1.2 Colorfastness.--The dyed yarns shall show good fastness to laundering, wet-dry cleaning and light.

3.4.2 Thread.--Stitching thread shall be dyed Light Blue O, C.A. 66029. When tested as specified in V-T-276, the dyed thread shall show good fastness to laundering, wet-dry cleaning and light.

3.5 Construction.--The shoulder cord shall conform to figure 1, and shall be formed by plaiting with two cords in a series of interlocking square knots around a center cord separated by small section of straight plaiting. There shall be a minimum of two inches of the plain center cord exposed in the center in which the buttonhole loop shall be tacked.

3.5.1 Plaiting cord.--The finished cord shall consist of a braided tubular rayon or nylon cover over a core specified in 3.5.1.1, and shall be 6/32 inch plus or minus 1/32 inch in diameter. The rayon cover shall be braided on a 16 carrier machine, 2 ends per carrier, of yarn specified in 3.3.1.2. The nylon cover shall be braided on a 16 carrier machine, 3 ends per carrier of yarn specified in 3.3.1.3. The finished cord cover shall have not less than 24 picks per inch in a two over, two under, plain braid.

3.5.1.1 Core.--The core shall consist of a braided cotton cover made on a 16 carrier machine, one end per carrier of yarn specified in 3.3.1.1.2, with not less than 12 picks per inch in a two over, two under, plain braid over 24 stuffer ends of yarn specified in 3.3.1.1.1.

3.5.2 Buttonhole cord.--The finished buttonhole cord shall consist of a tubular braided rayon or nylon cover yarn over sufficient cotton stuffer yarns to insure a diameter of 3/32 inch plus or minus 1/32 inch and a breaking strength of not less than 30 lbs. The cover shall be braided on an 8 carrier machine two ends per carrier, from yarn specified in 3.3.1.2, with not less than 14 picks per inch, in a one over, one under, basket braid.

3.5.3 Plaiting and knotting.--A piece of plaiting cord shall be cut to sufficient length so that a loop of 30 inches $\pm$ 1 inch shall be formed when the cord ends are joined together and stitched securely. An overlap on each side of the joint will be permitted to assure that the finished loop meets the breaking strength requirement of 40 pounds when tested as specified in 4.3.3.1. Stitching shall be permitted at joint and along the entire overlap and the thread for stitching shall be as specified in 3.3.2.1. The joint and overlap shall be covered by a 2 inch length of whipping and the yarn for the whipping shall be as specified in 3.3.1.2. The diameter of the joint and overlap, after whipping, shall approximate the diameter of the single plaiting cord (may be accomplished by removing part of core from cord end). At a point 7 to 9 inches

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

from the joint and working away from the joint, the two ends of plaiting cord shall be plaited around the center cord using interlocking square knots, for 18, plus or minus 2, plaits (10 inches). At this point, the cord shall be straight plaited using the center cord as a third plaiting cord, for 15, plus or minus 2, plaits (6-1/2 inches). The two ends of plaiting cords shall then be plaited around the center cord using interlocking square knots for 18, plus or minus 2, plaits (10 inches). The beginning of the plaiting shall be securely tacked on the underside to the center and adjacent loops. The ends of the plaiting shall be tucked underneath the underside loop and shall be securely tacked to the center and adjacent loop. Where the plaiting changes from interlocking square knots to regular plaiting, the plaiting shall be securely tacked on the underside. When the plaiting has been completed, there shall be a minimum of 2 inches of plain center cord exposed.

3.5.4 Buttonhole loop.--The buttonhole cord shall be cut to 4-1/4 inches, plus or minus 1/8 inch, in length. Both ends of this cord shall be inserted underneath the tubular braid of the exposed center cord a minimum of one inch so as to form a loop, then the loop shall be securely sewn to the center cord with thread specified in 3.3.2.2. When tested as specified in 4.4.1, the buttonhole loop shall show no sign of pulling loose.

3.6 Workmanship.--The finished shoulder cord shall be clean, well-made and shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.--Unless otherwise specified in the contract or order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.--When a first article is required, inspection and testing of the first article shall be made on a completely fabricated cord for all provisions of this specification applicable to end product examination and tests.

4.3 Inspection for acceptance.--Inspection shall be in accordance with provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 Testing of components.--In addition to the quality assurance provisions of subsidiary specification and drawing, components shall be tested as specified in table I. When the data in the "#determ per sample unit" and "Results reported as" columns are not specified in table I, they shall be as required by the reference test method. All requirements are applicable for the individual sample unit except for the breaking strength of the buttonhole cord,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

which shall be applicable to the lot average. The inspection level shall be S-1 and the acceptable quality level for sample unit rquirements shall be 6.5 defects per hundred units. The sample unit for test in table I shall be as follows:

Component	Sample unit
Rayon or nylon yarn for cord cover, whipping and buttonhole cord	1 cone, spool or tube
Cotton yarn for core cover	1 cone, spool or tube
Cotton yarn for stuffer ends	1 cone, spool or tube
Plaiting cord	1 cone, spool or tube
Buttonhole cord (braided)	5 yards

Table I Component Testing

Component	Characteristic	Rqm't para	Test method	#determ per s/u	Results reported as
Rayon yarn for cord cover, whipping and button-hole cord	Material ident	3.3.1.2 & 3.5.2	Std com'l	1	Pass or fail
	Size of yarn	3.3.1.2 & 3.5.2	Std com'l	1	Pass or fail
	Continuous filaments	3.3.1.2	Std com'l	1	Pass or fail
	Number of filaments	3.3.1.2	1/	1	Pass or fail
	Sulfur content	3.4.1	2020 1/	1	
	Colorfastness to:				
	Laundering	3.4.1.2	5614		
	Wet-dry cleaning	3.4.1.2	5622		
	Light 2/	3.4.1.2	5660		
Nylon yarn for cord cover, whipping and button-hole cord	Material ident	3.3.1.3 & 3.5.2	Std com'l	1	Pass or fail
	Size of yarn	3.3.1.3 & 3.5.2	Std com'l	1	Pass or fail
	Continuous filament	3.3.1.3	Std com'l	1	Pass or fail
	Number of filaments	3.3.1.3	1/	1	Pass or fail
	Sulfur content	3.4.1	2020 1/	1	
	Colorfastness to:				
	Laundering	3.4.1.2	5614		
	Wet-dry cleaning	3.4.1.2	5622		
	Light 2/	3.4.1.2	5660		
Cotton yarn (core cover)	Material ident	3.3.1.1.2	Std com'l	1	Pass or fail
	Size of yarn	3.3.1.1.2	Std com'l	1	Pass or fail
	Sulfur content	3.4.1	2020 1/	1	Pass or fail
	Colorfastness to:				
	Laundering	3.4.1.2	5610		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

Table I Component Testing (con't)

Component	Characteristic	Rqm't para	Test method	#dterm per s/u	Results reported as
	Wet-dry cleaning	3.4.1.2	5622		
	Light 2/	3.4.1.2	5660		
Cotton yarn (stuffer ends)	Material ident	3.3.1.1.1	Std com'l	1	Pass or fail
	Size of yarn	3.5.1.1	Std com'l	1	Pass or fail
Plaiting	Diameter	3.5.1	Std com'l	1	Nearest 1/32"
	Tubular	3.5.1	Visual	1	Pass or fail
	Number of carriers	3.5.1	Visual	1	Nearest whole No.
a. Outside tubular braid	Ends per carrier	3.5.1	Std com'l	1	Nearest whole No.
	Picks per inch	3.5.1	Std com'l	2	Average of 2 determ to nearest whole No.
	Weave	3.5.1	Visual	1	Pass or fail
b. Core					
(1) Inside braided cover	Weave	3.5.1.1	Visual	1	Pass or fail
	Number of carrier	3.5.1.1	Visual	1	Nearest whole No.
	Ends per carrier	3.5.1.1	Std com'l	1	Nearest whole No.
	Picks per inch	3.5.1.1	Std com'l	2	Average of 2 determ to nearest whole No.
(2) Stuffer ends	Number of ends	3.5.1.1	Visual	1	Nearest whole No.
	Color	3.4	Visual	1	Pass or fail
Buttonhole cord (braided)	Diameter	3.5.2	Std com'l	1	Nearest 1/32"
	Tubular braided	3.5.2	Visual	1	Pass or fail
	Number of carriers	3.5.2	Visual	1	Nearest whole No.
	Ends per carrier	3.5.2	Std com'l	1	Nearest whole No.
	Picks per inch	3.5.2	Std com'l	2	Average of 2 determ to nearest whole No.
	Weave	3.5.2	Visual	1	Pass or fail
	Breaking strength	3.5.2	4102	5	Average nearest 0.5 pounds

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

1/ Requirements accepted on basis of manufacturer's certification of compliance thereto.
2/ The time exposure shall be 80 standard fading hours.

4.3.2 In process inspection.--Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operation or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated non-conformance. In-process inspection shall be conducted to see that accomplishment of the following is in accordance with the specification requirements:

Operation	Rqm't para
Plaiting and knotting.....	3.5.3
Length of center cord loop and center cord ends, joined, stitched and whipped as specified.....	3.5.3
Plaiting begins 7 to 9 inches from center cord joint.....	3.5.3
Tucking and tacking of ends of plaiting.....	3.5.3
Buttonhole cord inserted in center cord for at least one inch and securely tacked.....	3.5.4

4.3.3 Intermediate inspection.--

4.3.3.1 Testing of intermediate product.--Testing of the partially fabricated plaited cord shall be performed for determination of breaking strength of joined center cord joint, as required in 3.5.3, in accordance with Test Method 4102 of FED-STD-191. The requirement is applicable to the individual sample unit. The sample unit shall be one partially fabricated plaited cord after the center cord has been joined, stitched and whipped. One determination per sample unit is required and the results shall be reported as "pass or fail". The inspection level shall be S-1 and the acceptable quality level shall be 6.5 defects per hundred units.

4.3.4 Inspection of the end item.--

4.3.4.1 Visual examination of cord.--The defects found during examination shall be classified in accordance with 4.3.4.1.3. The sample unit for these examinations shall be one completely fabricated cord.

4.3.4.1.1 Examination of plaited cord for defects in material, construction and workmanship.--

Examine	Defect	Major	(*)	Minor
Cord and loop material	Color or shade not as specified.....	x	-	-
	Not fabricated from the specified material...	x	-	-
	Spotted, stained, discolored or soiled.....	x	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

Examine	Defect	Major	(*)	Minor
	Objectionable odor	-	-	x
	Unevenly braided	-	*	-
	Cut or tear	x	-	-
	Broken, missing ends or picks	x	-	-
	Pulled threads	-	*	-
	Cord too stiff, i.e., not equal to standard or approval sample	-	-	x
	Frayed edges	-	*	-
	Core not completely covered	-	*	-
	Cord out of round	-	*	-
	Cords not continuous length, i.e., pieced	x	-	-
Construction and workmanship				
Plaiting and knotting of cord	Plaiting or knotting is not as specified or not as shown in figure 1	x	-	-
	Unevenly or loosely plaited or knotted	x	-	-
	Straight plaiting has less than 13 or more than 17 plaits	x	-	-
	Square knotting has less than 16 or more than 20 plaits	x	-	-
Buttonhole loop	Loop missing			
	Loop not securely attached	x	-	-
	Loop in wrong location	-	*	-
	Tacking not neatly accomplished	-	-	x
	Stitching thread wrong shade or color, i.e., does not correspond to require color	-	*	-
	Thread ends not neatly trimmed	-	-	x

(*) Defects so designated shall be classified as major when seriously affecting serviceability or appearance and minor when affecting serviceability or appearance, but not seriously.

4.3.4.1.2 Examination of shoulder cord for defects in dimensions.--Any dimension that is not within the specified tolerance shall be classified as a defect.

4.3.4.1.3 Inspection levels and acceptable quality levels (AQL's).--The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follow:

	Inspection level	AQL Major	Total
For defects applicable to 4.3.4.1.1	II	2.5	6.5
For defects applicable to 4.3.4.1.2	S-3	-	4.0

4.3.4.2 Testing of the end item.--Testing of the completely fabricated shoulder cord shall be performed to determine if the buttonhole loop is anchored securely as required in 3.5.4. The sample unit shall be one completely fabricated shoulder cord. The requirement is applicable to the individual sample unit. One determination per sample unit is required and the results shall be reported as "pass or fail". The inspection level shall be S-1 and the acceptable quality level shall be 6.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

4.3.5 Examination of count of cord in intermediate containers.—Cord packaged for shipment shall be examined to determine conformance with package marking and specified quantity. The sample unit for this examination shall be one box (interior package). Any box containing less than the specified or marked quantity of cords shall be classified as a defect. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units. The lot size shall be the number of intermediate containers.

4.3.6 Examination of preparation for delivery requirements.—An examination shall be made to determine that applicable packaging, packing and marking requirements are compiled with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item shipping lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing.
	Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling.
	Bulging or distortion of containers.
Contents	Number of cords per intermediate package is more or less than required. 1/
	Number of intermediate packages is more or less than required.

1/ For this defect, 3 intermediate packages shall be examined from each shipping container in the sample.

4.4 TESTS

4.4.1 Test for buttonhole loop.--After the attachment of the buttonhole loop has been completed, a force of 30 pounds pull shall be applied to the end of the buttonhole loop for a period of one minute. The buttonhole loop shall then be exmined to determine compliance with 3.5.4.

5. PREPARATION FOR DELIVERY

5.1 Packaging.—Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.—

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

5.1.1.1 Unit packaging.--Each shoulder cord shall be folded to measure approximately 13-1/2 inches in length. Each shoulder cord shall be placed in a polyethylene bag fabricated from film having a minimum thickness of 0.0015 inch. All seams and closure shall be effected by heat sealing. Prior to or during the heat sealing operation, excess air within the bag shall be expelled.

5.1.1.2 Intermediate packaging.--Ten (10) shoulder cords bagged as specified in 5.1.1.1 shall be packaged in two equal layers, with the top layer reversed, in a snug-fitting, setup paperboard box conforming to type I, variety 1, class A, style 4 of PPP-B-676. Box closure shall be in accordance with the appendix of the container specification. The use of Scotch Brand box closing filament tape no. 898 or equal, 1/2", using a minimum of two 1/2" X 4" ("L" Clips) on each edge, may be utilized as an alternate method for effecting closure of set-up boxes.

5.1.2 Level C.--Shoulder cords shall be packaged to afford adequate protection against deterioration and damage during shipment from the supply source to the first receiving station. The supplier may use his standard practice when it meets these requirements.

5.2 Packing.--Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.--Shoulder cords packaged as specified in 5-1, shall be packed in a snug-fitting fiberboard shipping container conforming to class weather-resistant, V3s or V3c of PPP-636. Closure shall be in accordance with the appendix of the applicable container specification.

5.2.2 Level B.--Shoulder cords packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard box conforming to class Domestic, grade 275 of PPP-B-636. Closure shall be in accordance with the appendix of the container specification. The weight of the contents of each shipping container shall not exceed the size and weight limitations of the container specification.

5.2.3 Level C.--Shoulder cords packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. Containers shall be in accordance with the rules and regulations of carrier applicable to the mode of transportation.

5.3 Marking.--In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages.--Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

to permit ready identification. The white paper label shall contain the following information:

STOCK NUMBER
NOMENCLATURE
MANUFACTURER'S NAME
CONTRACT NUMBER

6. NOTES

6.1 Intended use.--The rayon or nylon plaited shoulder cord covered by this specification is intended for use as a uniform accessory by infantrymen.

6.2 Ordering data.--Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) When a guide sample will not be furnished (see 3.1).

(c) When a first article is required (see 3.2).

(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Samples.--For access to samples address the procurement office issuing the invitations for bid.

Custodian:
ARMY-IH
Review Activity:
DLA-CT

Preparing Activity:
The Institute of Heraldry,
United States Army

Project No. 8455-A510

☆U.S. GOVERNMENT PRINTING OFFICE: 1983—605-034/1141

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

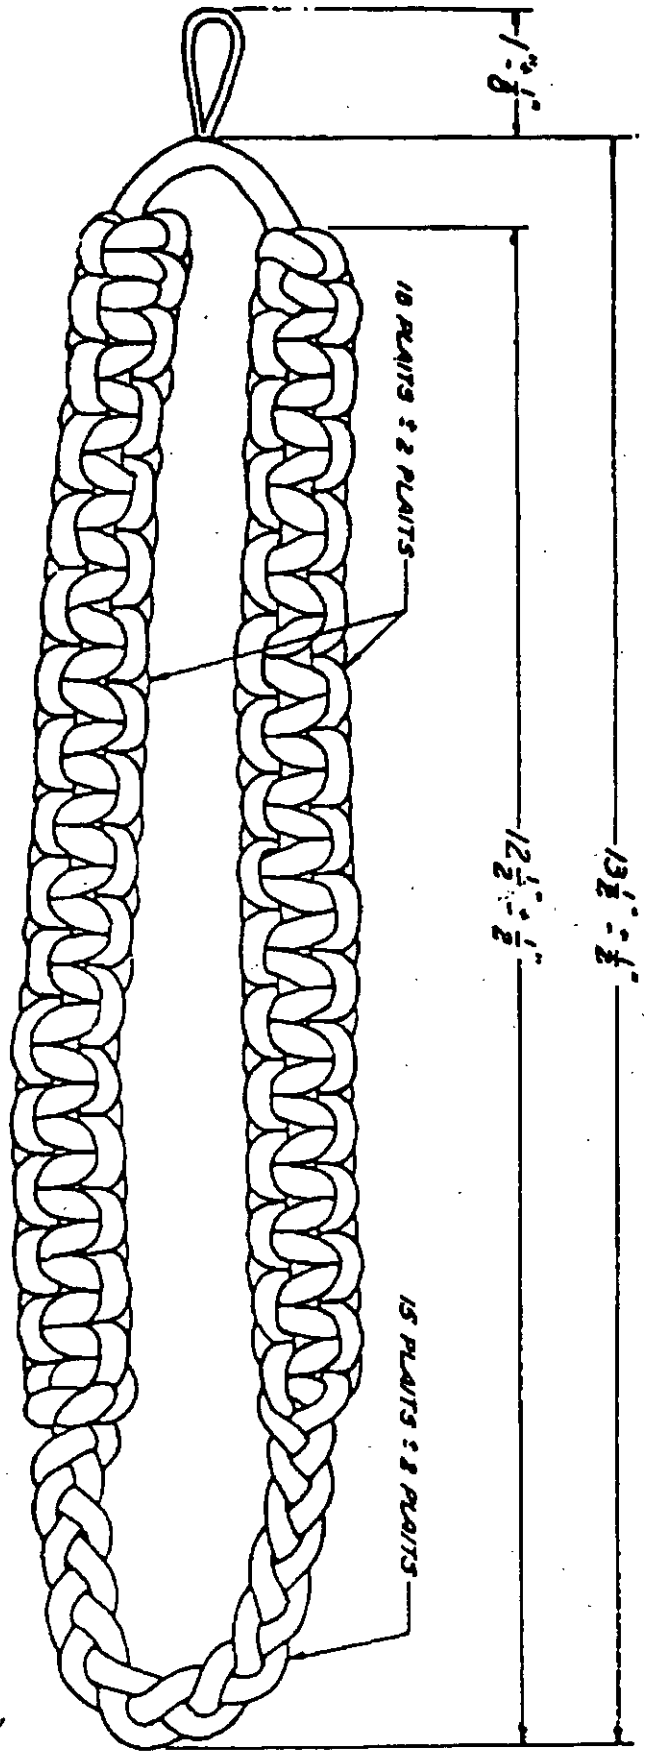


FIGURE 1

This is a miniature copy of
THE INSTITUTE OF HERALDRY
Dwg. No. B-10-10 dtd 3 SEP '74
This copy is furnished for information only.
The dwg. referenced in para. 2.1 governs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-S-11874D(IH)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.