MIL-T-45382A
5 NOVEMBER 1962
SUPERSEDING
SEE 6.3

MILITARY SPECIFICATION

TRAILERS, LOW BED, 4 WHEEL 2 TO 7 TON

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 Scope. This specification covers 2 to 7 ton, 4-wheel, low-bed trailers intended for use as tactical vehicles by the United States Armed Forces.

1.2 Classification. The vehicles shall be of the following models, as specified (see 6.2):

XM114El	- Trailer, Low bed, 3 Ton, 4 Wheel.
M143Al	- Trailer Bomb: 2 Ton, 4 Wheel.
XM455	- Trailer, Low bed, 5 Ton, 4 Wheel.
M529	- Trailer, Low Bed: Guided Missile, 7 – Ton, 4 – Wheel.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

TT-C-520	- Coating, Underbody (for Motor Vehicles).
VV-H-910	- Hydraulic Fluid, Non-Petroleum Base, Automotive

MILITARY

MIL-P-514	- Plates; Identification. Transportation – Data and Blank.
MIL-L-644	- Lubricating Oil, General Purpose, Preservative, (Water – Displacing, Low Temperature).
MIL-L-3150	- Lubricating-Oil, Preservative, Medium.
MIL-G-3278	- Grease; Aircraft and Instruments (for Low and High Temperatures).
MIL-H-6083	- Hydraulic Fluid, Petroleum Base, Preservative.
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-H-13910	- Hydraulic Fluid, Non-Petroleum Base, Automotive Brake, Arctic.
MIL-G-52152	- Generator Set, 3kW, 60 Cycles.

STANDARDS

FEDERAL

FEDERAL STD. NO. 595 - Colors.

MILITARY

MIL-STD-105	- Sampling Procedures and - Tables for Inspection by Attributes.
MIL-STD-193	- Painting Procedures, Tactical Vehicles (Tracked and Wheeled).

FSC 2330

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:51Z
Check the source to verify that this is the current version before use.

MIL-STD-281	- Automobiles, Trucks, Truck-Tractors, Trailers and Trailer Dollies; Preservation and Packaging of.
MIL-STD-642	- Identification Marking of Administrative, Combat, and Tactical Vehicles.

ENGINEERING PARTS LIST (EPL)

EPL-8736-217	- Trailer, Low bed, 3 Ton, 4 Wheel, XM114E1.
EPL-8736-126	- Trailer, Bomb, 2 Ton, 4 Wheel, M143A1.
EPL-8736-218	- Trailer, Low bed, 5 Ton, 4 Wheel, XM455.
EPL-9021-852	-Trailer, Low bed: Guided Missile, 7 Ton, 4 Wheel, M529.

(Copies of specifications, standards, drawings, engineering parts lists, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Qualified products. Vehicle manufacturer shall be responsible for ascertaining that all assemblies and component parts entering into the construction of these vehicles, which require product qualification in accordance with a specification, are listed on respective qualified products lists (QPL) or have been approved for such listing. Manufacturer's inspection record shall specifically list such components, name of supplier(s) and number and date of applicable QPL.

3.2 First production vehicles. The first two production vehicles of the type(s) produced under contract shall be submitted to representatives of the procuring activity for inspections specified in section 4, Quality Assurance Provisions, to determine conformance to the requirements of this specification. The first vehicle produced shall be inspected as specified in 4.2 through 4.2.5, and the second vehicle produced shall be inspected as specified in 4.3. Acceptance of the first two production vehicles shall not establish the acceptability of the remainder of vehicles under contract, in conflict with the acceptance levels specified in section. The first two vehicles, submitted by the contractor, shall be fully representative of units proposed to be furnished under the contract.

3.3 Materials. The materials shall be as specified herein and in the referenced specifications and drawings. Materials shall be free from all defects and imperfections that might affect the serviceability, utility, and appearance of the finished product.

3.4 Construction. Vehicles and all components thereof shall be constructed to conform to the following drawings or drawings listed in their respective engineering parts list (EPL) except as modified herein or by the procuring activity:

EPL-8736-217	- Trailer, Low bed, 3 Ton 4 Wheel, XM114E1
EPL-8786-126	- Trailer, Bomb, 2 Ton, 4 Wheel, M143Al
EPL-8736-218	- Trailer, Low bed, 5 Ton, 4 Wheel, XM455
EPL-9021-852	- Trailer, Low bed: Guided Missile, 7 Ton, 4 Wheel, M529

3.4.1 *Engine-generator set.* A 3-kilowatt, 60-cycle engine-generator set conforming to Specification MIL-G-52152, shall be furnished and installed on the trailer, low bed, M529.

3.5 Performance characteristics. Each vehicle shall demonstrate vehicle performance characteristics, specified in 3.5.1 through 3.5.9, when equipped as depicted on applicable drawings specified in the contract, serviced with recommended products (see table I), towed by an appropriate military prime vehicle (see table II), and subjected to loading conditions specified in table III.

3.5.1 *Payload, towing speeds, and trailing ability.*

3.5.1.1 *Payload and to towing speeds.* Payloads and towing speeds for the applicable vehicle shall be as specified in table III.

3.5.1.2 *Trailing ability.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:51Z
Check the source to verify that this is the current version before use.

Table I. Service products specifications

Product use	Ambient air temperature operating range	
	Minus 65° to 0°F	0° to plus 115°F
Fluid:		
For hydraulic brakes.	MIL-H-13910	VV-H-910
For shock absorbers.	MIL-H-6083	MIL-H-6083
Grease:		
For sealed bearings.	MIL-G-3278	MIL-G-3278
For general chassis lubrication, including wheel bearings.	MIL-G-10924	MIL-G-10924
Oil:	MIL-L-644	MIL-L-3150
For general purpose lubrication.		

Table II. Towing vehicle

XM114E1 –2½ Ton, 6x6, Cargo Truck, M35.
M143A1 –2½ Ton, 6x6, Cargo Truck, M35.
XM455 –5 Ton, 6x6, Cargo Truck, M54.
M529 –5 Ton, 6x6, Cargo Truck, M54.

3.5.1.2.1 *Highway.* When transporting the applicable payload (see table III), uniformly distributed over the load area, over level, smooth, improved, and prepared hard-surfaced roads at the sustained speed specified (see table III), each vehicle shall track the towing vehicle without weaving from side to side of the path of the towing vehicle moving in a straight line and without swaying laterally to the extent which adversely affects the controllability of the vehicle combination. M529 vehicle payload shall be distributed as shown in figure 1.

3.5.1.2.2 *Cross-country.* When simultaneously carrying the applicable payload (see table III) uniformly distributed, and being towed over unimproved roads, trails, open fields, rolling hills, and cross-country terrain at the appropriate speed (see table III), each vehicle shall follow the prime mover without damage to itself or to the prime mover. M529 vehicle payload shall be distributed as shown in figure 1.

Table III. Loads and speeds

Vehicle	Payloads (pounds)		Speed (miles per hour)	
Classification	Highway	Cross country	Highway	Cross country
XM114E	6420	6420	50	20
M143A1	4000	4000	50	30
XM455	10420	10420	50	20
M529	Primary/Secondary 12950 12950 (see 6.4)	Level/Hilly 12950 12950 (see 6.4)	Primary/Secondary 50 50	Level/Hilly 15 10

3.5.2 *Gradeability.* When towed over a dry, hard surface free of loose material, each vehicle shall exhibit stability and gradeability specified in 3.5.2.1 and 3.5.2.2.

3.5.2.1 *Longitudinal inclines.* Each vehicle shall follow the towing vehicle without weaving to the extent which adversely affects the controllability of the vehicle combination when ascending or descending longitudinal inclines having 40 percent grades.

3.5.2.2 *Side slopes.* Each vehicle shall follow the prime mover without slipping or upsetting when operating, either left or right, on side slopes having a 20 percent grade.

3.5.3 *Turning ability.* When coupled to the prime mover operating in its minimum turning circle, each vehicle shall follow without cramping or sideslipping, without damage to the towed vehicle or prime mover, and without interference between the towed vehicle and the prime mover. On the M529 the trailer dolly (front under-carriage and axle assembly) shall assume an angle of not less than 90° to the trailer without damage to dolly, trailer proper, or towing vehicle and without

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:51Z
Check the source to verify that this is the current version before use.

interference between the trailer and the towing vehicle.

3.5.4 *Braking ability.*

3.5.4.1 *Service brakes.* The combined service brakes of the trailer and towing vehicle shall control, decelerate, and stop the vehicle combination within 30 feet from a speed of 20 mph on dry, hard, level, smooth surface roads when loaded with highway payload.

3.5.4.1.1 *Service brake system.* The service brake system of the Trailer, Low Bed, M529 shall, with the air reservoir charged with air to 100 pounds per square inch (psi) plus or minus 5 psi and the air supply line disconnected, fulfill the following requirements:

(a) Brakes on all wheels of the trailer shall be applied.
(b) No hydraulic fluid leakage shall be evident.
(c) The rate of drop in air pressure shall be not less than one-half (1/2) psi per minute or more than 5 psi per minute with the brakes fully applied or fully released.

3.5.4.1.2 *Automatic actuation.* All vehicles shall be equipped with an automatically actuated device to apply the vehicle brakes upon breakaway from the towing vehicle, and to maintain application of brakes for not less than 15 minutes.

3.5.4.2 *Parking brake.* The parking (hand) brakes shall hold the vehicle on a dry, hard-surfaced 15 percent grade when uncoupled from towing vehicle and headed up or down incline.

3.5.5 *Bed-leveling system.* On the trailer low bed M529 the hand operated hydraulic system shall compress the entire suspension system so that the top of the "T" track at all points on ready mount rack measures 37½ inches, plus or minus 1 inch, above the ground while resting on level surface.

3.5.6 *Bumper.* On the trailer low bed M529 the bumper cylinder, shall take up the weight of the bumper in a smooth and constant movement without binding or dragging.

3.5.7 *Fording.* Each vehicle shall ford hard-bottomed, salt or fresh water crossing of depths great enough to completely submerge the chassis, and shall withstand such immersion for periods up to 15 minutes duration without damage to the vehicle or its components. In fording the trailer, low bed, M529, an appropriate approved fording kit for the engine generator set shall be used.

3.5.8 *Extreme climatic operation.* Each vehicle shall operate under any condition of inclement weather at an ambient temperatures ranging from minus 65° F. up to plus 115° F. and shall withstand, at the extreme conditions of weather and temperatures specified, protracted storage periods without indication of deterioration.

3.5.9 *Reliability.* Each vehicle shall be capable of operating at least 2,560 miles in a military environment without failure due to workmanship or materials; and when subjected to military operating conditions specified herein (see 3.5.1 through 3.5.8), shall exhibit flexural stiffness and torsional rigidity to withstand bending and twisting without evidence of failure.

3.6 Treatment and painting. Treatment and painting shall be in accordance with Standard MIL-STD-193. Colors shall conform to appropriate color chips in Standard Fed. Std. No. 595, and shall be as specified by the procuring activity (see 6.2).

3.7 Marking. Registration and other markings shall be in accordance with Standard MIL-STD-642.

3.8 Name, shipping, and service data plates. Data plates shall be photographic aluminum plate (sensitized). The plates shall have the photosensitive silver compounds inbedded within the oxide layer; and after photographic processing the letter, numbers, and all other characters shall be sealed in the oxide by suitable chemical treatment of the layer. The plates shall have a black background. All caution and warning plates shall have red lettering with a black background. The size of plate, type and size of lettering, and the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:51Z
Check the source to verify that this is the current version before use.

information to be included shall be in accordance with the applicable drawings or as specified by the procuring activity. Thickness of the plates shall be 0.030 inch minimum. The plates shall meet the performance requirements of Specification MIL-P-514.

3.9 Undercoating. Vehicle shall be under-coated, after painting, using coating compound conforming to Specification TT-C- 520. Coating shall be applied to all sheet metal under surfaces to a thickness of 1/16 to 1/8 inch; except that drain holes, lubrication points, frame members, heavy castings, axles, brakes, and suspension components shall be kept free of coating material.

3.10 Servicing and adjusting. Prior to acceptance of the vehicles by the Government inspector, contractor shall adjust and service each vehicle for immediate operational use including at least the following: adjust brake system, check electrical system; inflate all tires; and completely lubricate chassis and all running gear with grades of lubricants recommended for the ambient air temperature at the delivery point.

3.11 Workmanship. Workmanship shall be of a quality to assure delivery of vehicles which are free from defects resulting from defective material, improper manufacturing or incorrect assembly practices, and which shall meet or exceed requirements herein specified. Defective components or parts and assemblies which have been repaired or modified to overcome deficiencies shall not be furnished.

4. QUALITY ASSURANCE PROVISIONS

4.1 General quality assurance provisions.

4.1.1 *Contractor's inspection*. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and test shall be kept complete and available to the Government as specified in the contract of order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.2 *Contractor's quality assurance system.* The contractor shall provide and maintain an effective inspection and quality assurance system, acceptable to the Government, covering the supplies under the contract. A current written description of the system shall be submitted to the contracting officer prior to initiation of production. The contractor will not be restricted to the inspection station or to the method of inspection listed provided that an equivalent control is included in the approved quality assurance procedure. The contractor shall notify the Government of, and obtain approval for, any change to the written procedure that might affect the degree of assurance required by this specification or other applicable documents referenced herein.

4.1.3 *Government verification.* All quality assurance operations, performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of (a) surveillance of the operations to determine that practices, methods, and procedures of the written inspection plan are being properly applied, and (b) Government product inspection to measure quality of product offered for acceptance. Deviation from the prescribed or agreed-upon procedures, or instances of poor practices which might have an effect upon the quality of the product, will be immediately called to the attention of the contractor. Failure of the contractor to promptly correct deficiencies discovered shall be cause for suspension of acceptance until corrective action has been made or until conformance of product to prescribed criteria has been demonstrated.

4.1.4 *Qualified products.* The contractor's inspection records shall be examined to determine conformity to requirements of paragraph 3.1.

4.1.5 *Materials.* The contractor shall provide the Government with objective evidence that

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:51Z
Check the source to verify that this is the current version before use.

materials used are as specified in the applicable specifications and drawings, and have been tested in accordance with the Quality Assurance provisions contained therein.

4.1.6 *Service products.* The contractor shall furnish to the Government certification that products conforming to specifications contained in table I of paragraph 3.5 will be used in servicing vehicles under the contract.

4.2 First vehicle inspection.

4.2.1 *Inprocess inspection.* The first vehicle produced shall receive an inprocess inspection by the Government when the vehicle is approximately 50 percent complete. This inspection shall be conducted to evaluate workmanship and materials to applicable specifications. During this inspection, welding procedures will be reviewed, workmanship specimens evaluated, and the substructure examined for conformance to contractual requirements.

4.2.2 *Completed vehicle inspection.* The first vehicle, when completed, shall be given a provisional inspection to determine conformance to contract and specification requirements. This inspection shall be conducted by the Government at the contractor's plant, subsequent to contractor inspection.

4.2.3 *Corrections.* Corrections found necessary as a result of above inspections shall be made by the contractor on the vehicle.

4.2.4 *Vehicle disposition.* Upon completion of inspection, the vehicle will remain at the manufacturing facility and be the last vehicle shipped on the contract. The contractor shall service and maintain the vehicle during this period in accordance with the applicable documents for care and preservation while in storage.

4.2.5 *Final approval and acceptance.* Final approval and acceptance by the Government of the first vehicle shall be withheld until the 2,560 mile test of the second vehicle produced has been completed and a final determination has been made regarding conformity of the vehicle to contractual requirements, including, but not limited to, workmanship and materials.

4.3 Production vehicle test. After completion of provisional inspection of the first vehicle, the second vehicle produced shall be subjected to examination and tests specified herein and the 2,560 mile test specified in table IV. Inspections shall be performed by the Government and at a site approved by the Government, and will require a maximum of 60 days. The contractor will expeditiously furnish repair parts, as required, to adequately support the above inspections at no cost to the Government. Delays caused by vehicle breakdown and failure of the contractor to adequately support the vehicle with parts during the inspections shall not be the responsibility of the Government.

Table IV. 2560 Mile Test

Course	Mileage and Speeds	Vehicle Loading
Hard surface (highway)	1,000 miles @ variable speeds up to 50 MPH	Highway
Level cross country . . .	1,000 miles @ variable speeds up to required cross-country speeds .	Cross country
Hilly cross country	500 miles @ variable speeds up to required cross-country speeds . .	Cross country
Belgian block	60 miles @ speeds applicable to conditions to terrain	Cross country

4.3.1 *Test failure.* Failure of the production vehicle to comply with any of the requirements specified or any deficiency of a workmanship or materials nature found during the 2,560 mile test, shall be cause for rejection of the vehicle and refusal to accept additional vehicles until objective evidence has been provided by the manufacturer that corrective action has been taken to eliminate the deficiency. Additionally, any deficiencies of a workmanship or materials nature, or nonconformance with specified requirements discovered in the production vehicle as a result of the 2,560 mile test, shall be presumed to exist in production vehicles accepted by the Government

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:51Z
Check the source to verify that this is the current version before use.

prior to completion of said tests, unless satisfactory evidence to the contrary is furnished to the contracting officer. The deficiencies shall be corrected by the contractor at his own cost, including the cost of labor.

4.4 Inspection provisions.

4.4.1 *Lot formation.* A lot shall consist of all vehicles of one type from an identifiable production period, submitted at one time for inspection.

4.4.2 *Sampling.* For the purpose of visual, dimensional, and primary functional examination, a representative sample shall be selected from each lot in accordance with inspection level II of Standard MIL-STD-105.

4.4.2.1 *Examination.* The representative sample vehicles, selected in accordance with 4.4.2, shall be examined to verify compliance with this specification using the following classification of defects and acceptable quality levels (AQL's) listed in tables V and VI.

4.4.2.1.1 *Unclassified characteristics.* All defects having no bearing on function, safety, interchangeability or life, but are considered departures from good workmanship will be noted in writing. Workmanship deficiencies falling within this category and recurring in five consecutive lots or 10 lots or more within a 30-day period will be added to the minor classification of characteristics of the specification with no increase in AQL's. This deficiency may be deleted from the minor classification of characteristics when five consecutive lots are found free of the deficiency.

4.5 Tests.

4.5.1 *Performance.* Vehicle shall be subjected to road and performance tests specified in table VII. Vehicle shall be serviced with specified products listed in table I of paragraph 3.5. Vehicle tests shall be conducted at locations shown in table VII.

4.5.2 *Five-mile road test.* Each vehicle selected in accordance with 4.4.2 shall be operated for a distance of not less than five miles by the contractor. Vehicles shall be completely assembled and serviced. Test course or area shall be selected by the manufacturer in the vicinity of the manufacturing facility; and shall be on smooth, approximately level, hard-surfaced roads. Vehicles (less payload) shall satisfactorily pass the performance requirements specified in 3.5.1.1 (highway towing speeds), 3.5.3 (turning ability), and 3.5.4 (braking ability).

4.5.2.1 *Fording test.* To determine conformance to 3.5.7, vehicle shall be towed through water of depth to submerge the vehicle running gear for 15 minutes duration. On completion of fording requirements examination of vehicle and components shall be made for damage and lubrication contamination.

Table V. Major Defects AQL=25 Defects/100 Units

Categories	Characteristics	Defects	Method of Inspection
Major:			
101	Frame and bed	Structural, welding riveting or sheet metal defects	Visual
102	Front undercarriage	Malfunction; damage; welding defects	Visual and functional
103	Axles	Improper assembly or installation; welding defects	Visual and functional
104	Service brakes, automatic actuation, and parking brakes.	Malfunction; chatter and squeal; components damage; air and hydraulic leaks; nonconformance to holding.	Visual and functional
105	Electrical system components and circuits.	Malfunction; inoperative; lighting sequence improper; damage.	Visual and functional
106	Suspension system components, and spring compression cylinders	Damage; malfunction; hydraulic leaks; nonconformance.	Visual and functional

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:51Z
Check the source to verify that this is the current version before use.

Categories	Characteristics	Defects	Method of Inspection
107	Stabilizing jacks	Damage; nonconformance of stabilization requirements	Visual and functional
108	Bumper unit	Damage; nonconformance or stabilization requirements.	Visual and functional
109	Intervehicular hose, electrical cables, tubing, wiring, and ground straps.	Improper lengths; malfunction components damage	Visual and functional
110	Lunette eye	Casting defects; size improper	Visual
111	Trailing ability	Nonconformance	Functional
112	Turning ability	Nonconformance	Functional
113	Towing speed (highway) .	Nonconformance	Functional
114	Operating units	Overheating	Tactile (touch)
115	Gasoline engine-generator set	Damage; nonconformance	Visual and functional

Table VI. Minor Defects AQL=150 Defects/100 Units

Categories	Characteristics	Defects	Method of Inspection
Minor:			
201	Wheels and tires	Improper type, size, or mounting; excessive wobble	Visual
202	Electrical cables, tubing, wiring and ground straps	Improperly coded, protected, installed, or assembled	Visual
203	Service and parking brake components.	Improper assembly, installation, or adjustment	Visual
204	Electrical system components	Improper assembly and installation	Visual
205	Suspension system components, and spring compression cylinders.	Improper assembly and installation	Visual
206	Frame, bed, and sheet metal. .	Improper assembly or installation	Visual
207	Front undercarriage	Improper assembly or installation	Visual
208	Stabilizing jack	Improper assembly or installation	Visual
209	Bumper unit	Improper assembly or installation	Visual
210	Lunette eye	Improper assembly or installation	Visual
211	Tiedowns, lashing hooks, and lifting devices.	Missing; improperly located; welding defects	Visual
212	Reflectors	Missing; defective, improper installation . . .	Visual
213	Paint	Application and color improper	Visual
214	Lube fittings	Defective; missing; improper installation . . .	Visual
215	Markings, decals, data and instruction plates.	Incomplete data; improper size or installation; missing	Visual
216	Lubrication	Improper application	Visual
217	Tools	Missing; defective	Visual
218	Protective coatings	Application, coverage and materials improper	Visual

4.5.3 *Control test.* The Government inspector shall select at random for road test by the contractor, 1 out of each 100 vehicles submitted, but not more than 2 vehicles in any given 30-day period, for a distance of 50 miles with highway payload. During this test all equipment shall be installed and vehicle subjected to tests to assure conformance to the requirements specified in 3.5.1.1 (highway towing speeds), 3.5.3 (turning ability), 3.5.4 (braking ability).

4.5.3.1 *Test failure.* If a vehicle fails to pass any control test specified herein, the Government inspector shall stop acceptance of subsequent

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:51Z
Check the source to verify that this is the current version before use.

Table VII. Locations for test

Title of test	Requirement paragraph	Test paragraph	Place of manufacturer	Government proving ground
Road (5 mile)	. . . . .	4.5.2	X	
Highway Operation	3.5.1.1	4.5.2	X	X
Cross Country Operation	3.5.1.2	. . . . .	. . . . .	X
Braking Ability	3.5.4	4.5.2	X	X
Fording Ability	3.5.7	4.5.2.1	. . . . .	X
Turning Ability	3.5.3	4.5.2	X	X
Gradeability	3.5.2	. . . . .	. . . . .	X
Control test	. . . . .	4.5.3	X	
Inspection Comparison	. . . . .	4.5.4	. . . . .	X
Production Vehicle	3.2	4.3	. . . . .	X
First Vehicle	. . . . .	4.2	X	

lots until objective evidence has been provided by the manufacturer that corrective action has been taken to eliminate the condition which caused rejection.

4.5.4 *Inspection comparison test.* The Government may select vehicles at any time during the production period, and subject vehicle(s) to tests specified in table IV. Tests shall be conducted by the Government at a site selected or approved by the Government.

4.5.4.1 *Test failure.* Failure of any vehicle tested under paragraph 4.5.4 to comply with any of the requirements specified in the contract or any major deficiency of a workmanship or materials nature occurring during or as a result of the test cycle may be considered cause for refusal to continue acceptance of vehicles by the Government until objective evidence has been provided by the manufacturer that corrective action has been taken by the manufacturer to eliminate the conditions which caused rejection.

4.6 Preservation, packaging, and vehicle processing. Preservation and packaging of vehicle and equipment shall be inspected prior to shipment to assure conformance with the applicable requirements specified in section 5 of this specification.

5. PREPARATION FOR DELIVERY

5.1 Vehicle processing. Vehicle shall be processed for shipment and storage in accordance with Standard MIL-STD-281 to the extent indicated on the vehicle preservation data sheets furnished by the procuring activity (see 6.2).

6. NOTES

6.1 Intended use. Trailers, covered by this specification, are intended to be used by the Armed Services as indicated in table VIII.

Table VIII

Classification	Intended use
XM114E1 . . .	Transport general cargo.
M143A1	Transport bombs, munitions, and military supplies.
XM455	Transporting general cargo.
M529	Transport Nike-Hercules missile.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Model of vehicle to be furnished (see 1.2).
(c) Information to be shown on data plates (see 3.8).
(d) Level of preservation and packaging, and vehicle preparation for shipment and storage data sheet, or implementing instructions, to indicate requirements of Standard MIL-STD-281 that apply to the vehicle being procured (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:51Z
Check the source to verify that this is the current version before use.

(e) Painting procedure and color of paint (see 3.6).

6.3 Superseding data. This specification supersedes the following or portions thereof:

MIL-T-45382(ORD), dated 20 October 1961: Trailer, Low Bed: Guided Missile, 7 Ton, 4 Wheel, XM529.

MIL-T-45320A (ORD), dated 2 June 1959: Trailers, Low Bed and Chassis, Trailers: 3-and 5-Ton, 4-Wheel (Type I and 11 low bed portions).

MIL-T-45346, dated 16 November 1959: Trailer, Bomb: 2-Ton, 4-Wheel, M143A1.

6.4 Road definitions:

6.4.1 *Primary roads.* Primary (main) roads may be defined as an improved thoroughfare paved with cement concrete, brick, or macadem to create a level, smooth, hard surface sufficiently wide to accommodate at least two-way traffic at high speeds under all weather conditions.

6.4.2 *Secondary roads.* Secondary roads may be defined as an improved route prepared on a dry earth bed covered with compacted gravel or crushed stone to form a comparatively level, solid surface of adequate width to serve at least two-way traffic at moderate speeds under all weather conditions.

6.4.3 *Level cross country.* Level cross-country operation may be defined as travel over unimproved dirt roads, cleared nonwooded trails, and open fields having firm terrain.

6.4.4 H*illy cross country.* Hilly cross-country operation may be defined as travel over firm, natural raised and rounded nonmountainous terrain forming grades of various degrees.

6.5 Test scope. Each bidder is invited to visit the Department of the Army testing facilities at Aberdeen Proving Ground, prior to submitting proposals, in order to familiarize himself with the scope and type of tests to which the vehicle will be subjected. Failure of any bidder to avail himself of this opportunity shall not react to his benefit in the event that construction failures result from such tests.

6.6 Figure 1. M529 loading.

6.7 Weight (M529) gross weight (GVW) will be 28,000 pounds. Net vehicle weight will be approximately 14,500 pounds.

6.8 Design responsibility. Performance requirements are established to provide criteria for determining conformance of the vehicle to specified requirements, including workmanship and materials. The contractor shall not assume design responsibility unless specifically directed by the procuring agency through Engineering order.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:
Army - MO
Navy - Docks

Preparing activity:
Army - MO

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:51Z
Check the source to verify that this is the current version before use.

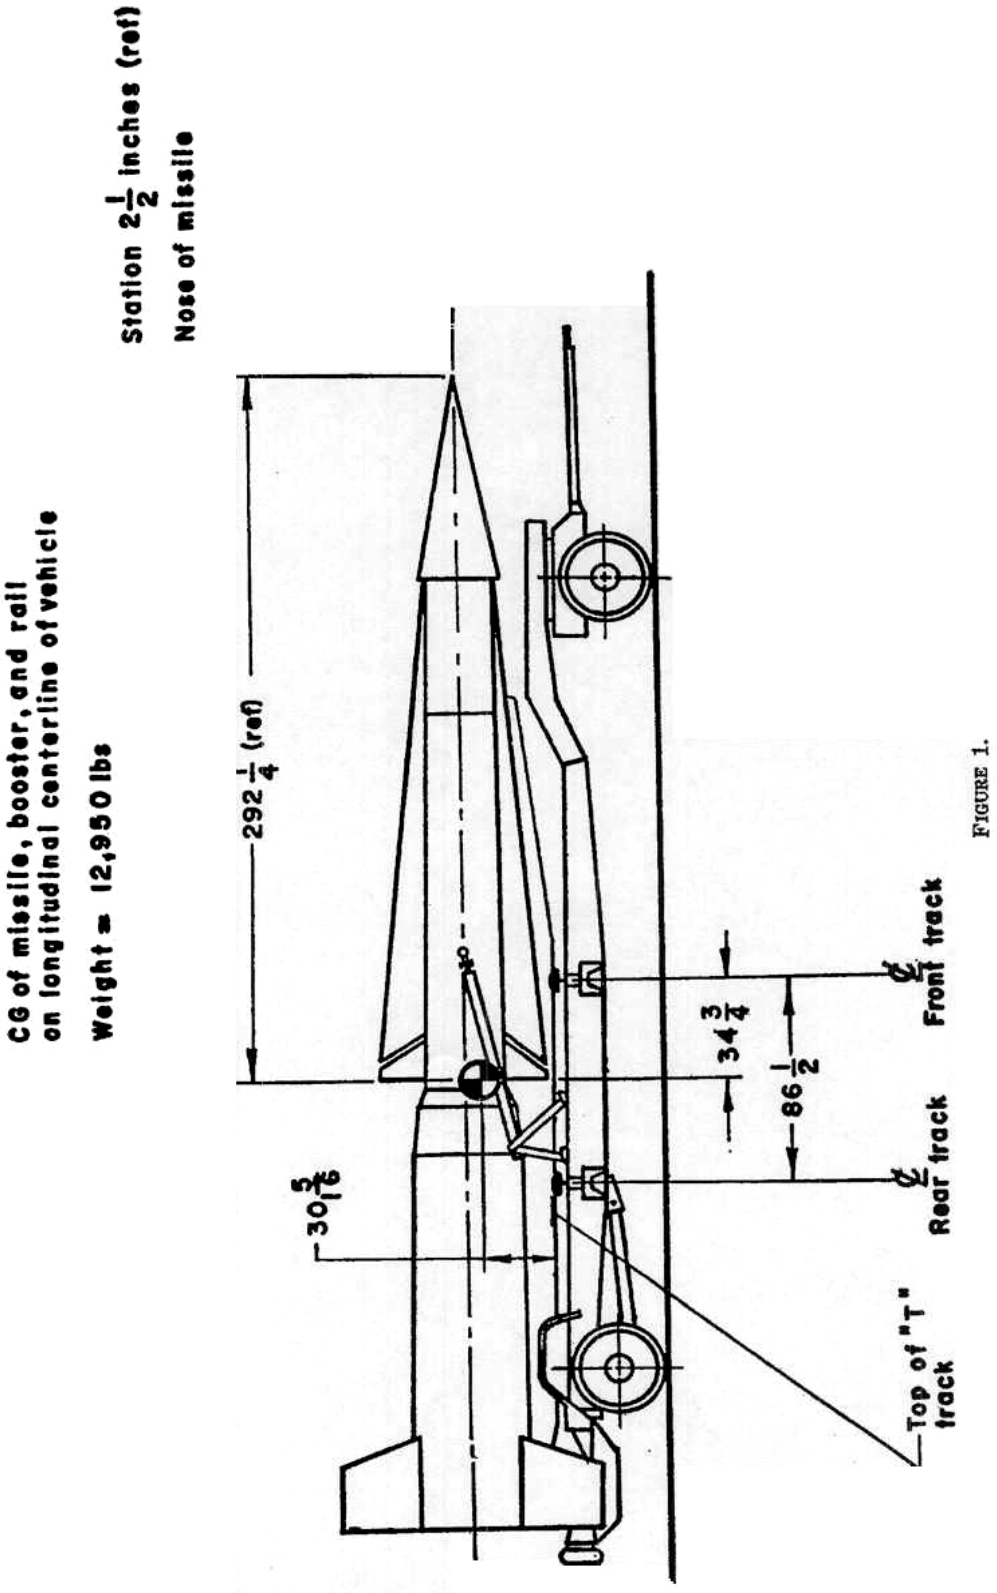


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:51Z
Check the source to verify that this is the current version before use.