MIL-S-38380B(USAF)
5 May 1970
Superseding
MIL-S-38380A(USAF)
27 September 1968

MILITARY SPECIFICATION

* SURVIVAL KIT CONTAINER, CNU-68B/P AND CNU-155/P

1. SCOPE

*1.1 Scope. This specification covers the requirements for two types of survival kit containers for use with the B-52 and F-5 aircraft.

*1.2 Classification. The survival kit containers shall be of the following types, as specified (see 6.2):

CNU-68B/P	Survival Kit Container, F-5 Aircraft (with seat cushion conforming to Drawing 68E280)
CNU-155/P	Survival Kit Container, B-52 Aircraft (with seat cushion conforming to Drawing 70165)

2. APPLICABLE DOCUMENTS

*2.1 The following documents form a part of this specification to the extent specified herein. The applicable issues of the governmental documents shall be the issues in effect on date of invitation for bids or request for proposal. The applicable issues of the nongovernmental documents shall be those which are available in the files of the procuring activity and made a part of the invitation for bids or request for proposal.

SPECIFICATIONS

Federal

L-P-383	Plastic Material, Polyester Resin, Glass Fiber Base, Low Pressure Laminated
PPP-B-636	Box, Fiberboard

Military

MIL-P-116	Preservation, Methods of
MIL-W-4088	Webbing, Textile, Woven Nylon
MIL-S-5002	Surface Treatments and Metallic Coatings for Metal Surfaces of Weapons Systems

FSC 4220

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

MIL-W-5625	Webbing, Textile, Nylon, Tubular
MIL-C-5688	Cable Assemblies, Aircraft, Proof Testing and Pre-stretching of
MIL-C-6021	Casting, Classification and Inspection of
MIL-T-6117	Terminal-Cable Assemblies, Swaged Type
MIL-W-6858	Welding, Resistance: Aluminum, Magnesium, Nonhardening Steels or Alloys, Nickel Alloys, Heat-Resisting Alloys, and Titanium Alloys; Spot and Seam
MIL-R-7575	Resin, Polyester, Low-Pressure Laminating
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series: General Specification for
MIL-I-8500	Interchangeability and Replaceability of Component Parts for Aircraft and Missiles
MIL-W-8611	Welding, Metal Arc and Gas, Steels, and Corrosion and Heat Resisting Alloys, Process for
MIL-A-8625	Anodic Coatings, for Aluminum and Aluminum Alloys
MIL-R-9300	Resin, Epoxy, Low-Pressure Laminating
MIL-P-9400	Plastic Laminate Materials and Sandwich Construction, Glass Fiber Base, Low Pressure Aircraft Structural, Process Specification Requirements
MIL-F-21840	Fastener Tape, Hook and Pile, Nylon

STANDARDS

Federal

FED-STD-406	Plastics: Methods of Testing
FED-STD-595	Colors

Military

MIL-STD-100	Engineering Drawing Practices
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of US Military Property
MIL-STD-143	Standards and Specifications, Order of Precedence for the Selection of
MIL-STD-147	Palletized and Containerized Unit Loads, 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base
MIL-STD-810	Environmental Test Methods
MIL-STD-889	Dissimilar Metals
MS20995	Wire, Safety
MS33540	Safety, Wiring and Cotter Pinning, General Practices for

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

DRAWINGS

Air Force

50B3502	Cable-Valve Release, Multiplace Life Raft
64C43333	Strap-Assembly, Adjustment
70165	Cushion-Seat, Aircraft, Survival Kit CHU-7/P

USS Chemicals, Lincoln Molded Plastics

RP755-01	Survival Kit Container, Assembly of - CNU-68A/P
RP755-02	Survival Kit Container, Assembly of - CNU-68A/P

(*Copies of specifications, standards, drawings, and publications* required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction. This specification makes provisions for preproduction testing.

3.2 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.3 Materials and processes

3.3.1 Metals. Metals shall be of the corrosion-resistant type or suitably treated to resist corrosion due to fuels, salt spray, or atmospheric conditions likely to be met in storage or normal service.

3.3.2 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.3.3 Nonmagnetic materials. Nonmagnetic materials shall be used for all components except where magnetic materials offer definite advantages.

3.3.4 Nonmetallic materials. The use of nonmetallic materials shall require approval by the procuring activity for the specific application involved.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

3. 3. 4. 1 Fiber glass. If fiber glass material is used in the construction of the basic container, it shall be manufactured in accordance with the requirements of MIL-P-9400. The material shall meet the physical requirements of table I and workmanship requirements of L-P-383 when tested in accordance with the applicable methods of FED-STD-406. Where glass cloth is used, it shall be preimpregnated cloth. Resins shall be in accordance with MIL-R-7575 or MIL-R-9300 for polyester and epoxy resins, respectively.

3. 3. 5 Fungus-resistant material. Materials which are not susceptible to fungus attack shall be used to the greatest extent practicable. When materials are used that are susceptible to fungus attack, they shall be treated with a fungicidal agent.

3. 3. 6 Protective treatment. When materials are used in the construction of the basic container which are subject to deterioration when exposed to climatic and environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or when exposed to extreme climatic and environmental conditions shall be avoided.

3. 3. 6. 1 Aluminum parts. All aluminum parts shall be anodized in accordance with MIL-A-8625. After anodizing, all exposed parts shall be processed with a potassium dichromate seal and dyed to a color suitable to the procuring activity.

TABLE I. Physical Properties of Fiber Glass

Characteristic	Cloth	Mat and Roving
Flex strength, pounds per square inch (psi), minimum	60, 000	32, 000
Flex modulus, minimum	3.0×10^6	1.1×10^6
Tensile strength, psi, minimum	47, 000	18, 000
Compressive strength, psi, minimum	45, 000	22, 000
Moisture absorption, percent per 24 hours, maximum	0. 5	1. 0
Impact strength, foot-pounds per inch, minimum	25	20
Unnotched		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

3.3.6.2 Steel parts. All steel parts shall be cadmium or zinc plated in accordance with applicable specifications unless the part is made of corrosion-resisting steel or has been otherwise protected in accordance with MIL-S-5002.

3.3.7 Weights of materials. The components shall be made of the lightest possible materials consistent with configuration, strength, and other requirements specified herein.

3.4 Design and construction

*3.4.1 Survival kit container. The survival kit containers shall incorporate the components on figure 1. The CNU-68B/P container and seat cushion shall conform to USS Chemicals Drawing RP755-01 and subassemblies. The CNU-155/P container shall conform to USS Chemicals Drawing RP755-02 and subassemblies except that the seat cushion shall be in accordance with Drawing 70165 in lieu of Drawing 59J3541. The type designations for the containers shall be as specified in 1.2 in lieu of CNU-68A/P as shown on the referenced USS Chemicals drawings.

*3.4.2 Operation. The survival kit container shall be designed to allow the following operations:


a. Normal abandonment of the aircraft after a flight, taking the parachute and leaving the container in the aircraft. Disconnection of the container shall be made at the parachute accessory rings.

b. Emergency abandonment of the aircraft on the ground, in the water, et cetera. Operation of the lap belt buckle will release the man from the seat. The survival kit container may be removed or may remain in the aircraft based upon the user's decision. When the container is to be left in the aircraft, the container emergency release handle shall permit manual actuation of the container to release all connections between the container and the parachute. The raft shall not be actuated and the survival kit dropline attachment fitting shall remain with the portion of ahrdware remaining with the container.

c. Ejection with subsequent manual release of the container from the man followed by inflation of the life raft. The raft and survival equipment shall be secured to the man by means of a dropline. This operation shall be accomplished in the following steps:

(1) Separation of the container from the seat shall automatically connect the dropline to the portion of the container hardware remaining attached to the personnel parachute harness accessory ring after container deployment. There shall be no possible interference due to snagging or jamming of the container with any parts of the seat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

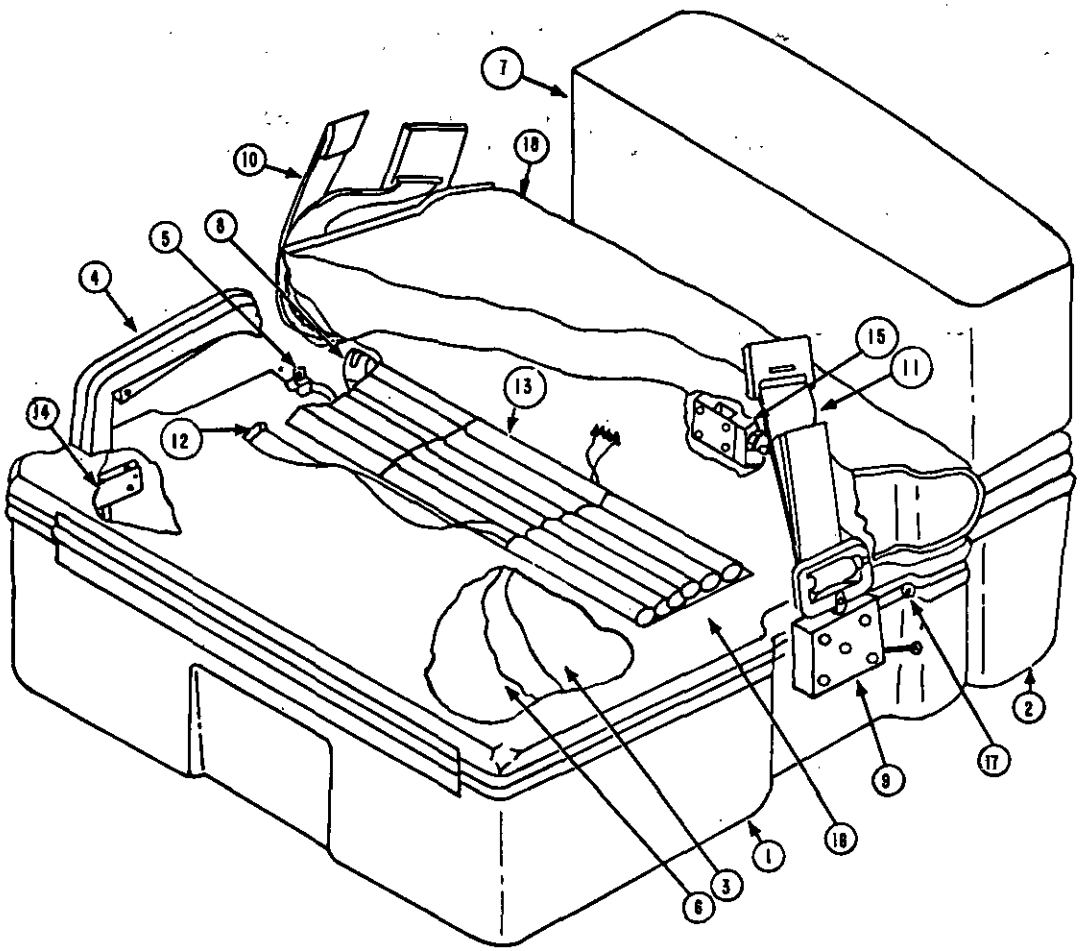

1 FORWARD COMPARTMENT OF CONTAINER
2 AFT COMPARTMENT OF CONTAINER
3 INNER CONTAINER
4 KIT RELEASE HANDLE
5 MULTI-RELEASE DEVICE
6 RAFT RETAINER
7 PARACHUTE SUPPORT
8 RIGHT-HAND HARNESS ATTACHMENT STRAP SIDE RELEASE
9 LEFT-HAND HARNESS ATTACHMENT STRAP SIDE RELEASE
10 RIGHT-HAND ATTACHMENT STRAP
11 LEFT-HAND ATTACHMENT STRAP
12 DROPLINE
13 DROPLINE CONTAINER
14 DROPLINE CONNECTING PLUNGER DEVICE
15 LID LOCKS
16 FORWARD COMPARTMENT LID
17 MANUAL LID RELEASE
18 CUSHION

* FIGURE 1. Survival Kit Container

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

(2) A manual pull of the container kit release handle shall separate the container from the man and unlock the lid. The upper end of the dropline shall be retained with the personnel parachute harness, the raft inflation system shall be actuated by dropline deployment, and the inner container and lower container shall be retained at the bottom of the dropline.

*3. 4. 3 Reliability. The survival kit container operating hardware shall have a mean-cycle-between-failures (MCBF) of 100 cycles with a minimum reliability of .99 at a 90 percent confidence level. A cycle shall consist of one operation as specified in 4. 6. 3.

3. 4. 3. 1 Longevity. The survival kit container shall have a service operating life span of not less than 300 cycles in the manual mode before wearout failures occur or the equipment consistently fails to meet the specified MCBF index. Parts requiring replacement within this period of time and the normal operating period of such parts shall be recorded by the contractor.

3. 4. 4 Welding. Welding shall be accomplished in accordance with MIL-W-8611 or MIL-W-6858, or both.

3. 4. 5 Castings. Castings shall be designed and inspected in accordance with MIL-C-6021.

3. 4. 6 Safetying. All threaded parts shall be positively locked or safetied by safety wiring, self-locking nuts, or any other approved methods. Safety wire shall be applied in accordance with the practice specified in MS33540 and shall conform to MS20995.

3. 4. 7 Swaging. Swaging shall be done in accordance with MIL-T-6117 and shall be carefully performed. Each swaging operation shall be proof tested to 100 pounds or three times the maximum service load, whichever is greater.

3. 5 Performance

3. 5. 1 Hardware operation. The container hardware shall operate satisfactorily as specified herein when tested in accordance with 4. 6. 2.

3. 5. 2 Inner container valve operation. The inner container vent valve shall actuate at 0. 5 (+0. 3, -0. 2) psi, shall reseat and seal below that range, and shall permit a flow rate of 5 (±1/2) cubic feet per minute at 1. 5 psi when tested as specified in 4. 6. 4.

3. 5. 3 Inner container leakage. The inner container shall not leak when submerged in water to a depth of 1 foot for 5 minutes as specified in 4. 6. 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

3.5.4 Environmental conditions

3.5.4.1 The container shall operate satisfactorily under the following environmental conditions when subjected to the referenced test methods as specified in 4.6.6:

a. High temperature operation at 160°F - method 501, procedure I of MIL-STD-810

b. Temperature shock - method 503 of MIL-STD-810

c. Low temperature operation at -65°F - method 502 of MIL-STD-810

d. Dust - method 510 of MIL-STD-810

e. Humidity - method 507, procedure I of MIL-STD-810

f. Salt fog - method 509 of MIL-STD-810

g. Shock - method 516, figure 516.1-2, procedures I and III of MIL-STD-810

h. Fungus - method 508 of MIL-STD-810.

3.5.4.2 Vibration. The hardware shall operate satisfactorily when the container is subjected to vibration conditions as specified in 4.6.6.7.

3.5.5 Simulated parachute deployment. The container shall withstand a force of at least 30g (peak) and a minimum rate of increase of 500g per second, as recorded between the webbing assembly and drop cable, when tested in accordance with 4.6.7.

3.5.6 Proof loads. The container assembly shall operate satisfactorily in accordance with 4.6.2 after being subjected to the tests of 4.6.9. The container shall show no evidence of damage or permanent deformation.

3.5.7 Lid retention. The lid shall not separate from the container when a load of 700 pounds is applied as specified in 4.6.10. There shall be no visual evidence of failure of the lid lock, and the container shall operate satisfactorily when tested in accordance with 4.6.2.

3.5.8 Static load. The hardware and the container section to which it is fastened shall withstand minimum specified static loads without structural failure when subjected to the tests specified in 4.6.11.

*3.5.9 Operation (simulated parachute descent). The survival kit container shall operate satisfactorily when subjected to simulated parachute descent operation tests as specified in 4.6.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

3.5.10 Interchangeability of critical parts. All critical parts such as lids, cushions, kit release handles, and container attaching hardware shall be interchangeable in accordance with 4.6.12 and MIL-I-8500.

3.5.11 Container material. If the basic container is constructed of fiber glass, the container material shall meet or exceed the requirements of 3.3.4.1 when tested in accordance with 4.6.13.

*

3.6 Basic container. The container shall provide a maximum usable interior volume consistent with the requirements specified herein. Where it is necessary to provide holes in the container, there shall be no interstices greater than 1/16 inch. This also applies to lid parting lines with the container packed with equipment. The container shall be built so that the parts will not work loose in service and shall withstand the strains, jars, and other conditions incident to shipping, storage, installation, and service without failure. The top surface of the lid shall be furnished with cushion attachment provisions to mate with the cushion specified in 3.4.1a.

3.6.1 Lid mechanism. The lid mechanism shall open automatically when the kit release handle is pulled. The lid retaining mechanism shall not permit the lid to separate from the container when an internal load of 700 pounds is applied to the lid. It shall not be possible to accidently open the lid during normal in-flight usage or during bailout.

3.6.2 Control cables. Control cables shall be tested and prestretched in accordance with MIL-C-5688. Any control cable adjustments necessary for manufacturing shall be permanently locked after rigging. Lock wire is not considered adequate for this purpose. All cables shall be properly guarded to prevent wearing or fraying during continued use of the container.

3.6.3 Inner container retention straps. Two each retention straps shall be installed diagonally in the survival kit container to retain the inner container after deployment and during parachute descent. Quick-release buckles shall be included on the retention straps to permit release by a one-handed operation. The buckles shall incorporate a loop for operating the buckles; the loop shall be fabricated of 9/16-inch-wide nylon tape measuring 4 inches on the flat and shall be yellow conforming to color No. 33538 of FED-STD-595.

3.6.4 Dropline. The survival kit container shall be provided with a dropline that will retain the container (packed with 35 pounds of survival equipment) and an inflated LRU-6/P one-man life raft to the individual when the survival kit container is deployed during parachute descent. The dropline shall be constructed of 3/4-inch-wide, natural color, tubular nylon webbing conforming to MIL-W-5625.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

3.6.4.1 Dropline design and location. The dropline shall be 25 feet in length. One end of the dropline shall be permanently attached to the separating container hardware. The dropline shall be routed under the lid, through the lid and container mating extrusions, and the distal end shall be attached to the inside aft wall of the main compartment. A stop on the dropline shall prevent deployment of the dropline until the lid is opened and shall cause separation of the lid from the container during deployment. A loop for attaching the raft to the dropline shall be located 10 feet up from the container; the loop shall measure 2-3/8 (±1/8) inches on the flat. A cable-valve release in accordance with Drawing 50B3502-5 shall be attached to the dropline so that the ball is located 6-1/4 (±1/4) inches from the end of the raft-attaching loop, measured on the flat. The cable-valve release shall actuate the LRU-6/P raft inflation assembly by the deployment of the dropline caused by the weight of the container. The free length of the dropline shall be reefed, as flat as possible, into rubberized fabric retainers which shall be attached to the inside of the lid by means of four 2-inch squares of tape conforming to MIL-F-21840, type I.

3.7 Hardware. The hardware shall be as specified herein. All hardware which could come in contact with the raft and inner container during deployment as in a service operation shall be smooth and free of sharp edges or protrusions. Decals shall be used where necessary to show operation and maintenance procedures.

3.7.1 Functions. The survival kit container hardware system shall accomplish the following actions:

a. Separate the container from the man (both during parachute descent and during emergency escape on the ground).

b. Open the main compartment lid locks (during parachute descent only).

c. Actuate the life raft by dropline deployment (during parachute descent only).

d. Couple the dropline to the parachute harness attaching hardware (during parachute descent) and separate the dropline (during escape on the ground) as required.

The system shall be designed so that certain functions occur when the kit release handle is pulled during parachute descent, and different functions occur when the handle is pulled for emergency escape on the ground. This shall be accomplished by means of an automatic dropline connecting plunger device located against the side of the container so as to bear against the bottom of the ejection seat pan. While the container is in the ejection seat, the plunger is depressed into its housing. After the container separates from the ejection seat for parachute descent, the plunger extends. This plunger action shall couple the dropline to the man's parachute harness.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

3.7.2 Kit release handle operating force. The kit release handle shall unlock with a pull of 20 ±5 pounds. After unlocking the handle, it shall require a maximum pull of 15 pounds to free the handle from the container under emergency ground operation and 30 pounds during parachute descent conditions. During or after exposure to environmental tests the maximum pull shall be 30 pounds during emergency ground egress and 50 pounds during parachute descent. The loads shall be applied 2 inches from the forward end of the handle and shall move through the arc of the handle travel.

3.7.3 Adjustment strap assembly. The adjustment strap assembly shall conform to Drawing 64C43333 except that green webbing in accordance with MIL-W-4088, type VI, shall be used, and the webbing shall be stitched along the perimeter only. The webbing end stops may be furnished in any suitable design which will prevent pulling of the webbing end through the adjuster and snagging on the seat but which will permit easy removal and replacement of the adjuster strap assembly. Strap ends shall be seared to prevent fraying.

*3.7.4 Dropline connecting plunger device. The dropline connecting plunger device shall be fully retracted by the weight of the survival container when the container is placed flat against the bottom of the ejection seat pan and weighted at the center of the container to achieve a total weight of 30 pounds. The plunger, when free, shall extend 1-1/8 (±1/8) inches from the bottom of the container, and the changing of modes shall occur while the plunger is extended in the range of 3/4 (±1/8) inch from the bottom of the container.

*

3.8 Threads. Only straight threads conforming to MIL-S-7742, National Fine Thread Series, class 2 (NF-2) or Unified Thread Series, class 2A or 2B, shall be used.

3.9 Part numbering of interchangeable parts. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The item identification and part number requirements of MIL-STD-100 shall govern the manufacturer's part numbers and changes thereto.

*3.10 Weight. The weight of the survival kit container, including all components listed on figure 1, shall not exceed 18.5 pounds.

3.11 Color. The basic container color shall be sage green color No. 34092 in accordance with FED-STD-595. If material is molded fiber glass, the glass fibers shall not be considered a part of the color.

3.12 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130.

3.13 Workmanship. The survival kit container shall be made in accordance with the best shop practices for this type of equipment. The container shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

free of defects, burrs, sharp edges, rough grinding marks, and uneven surfaces due to forming operations. Particular attention shall be paid to accuracy of dimensions; radii of fillets; marking of parts and assemblies; thoroughness of welding, brazing, painting, riveting, swaging, soldering, alignment of parts, tightness of assembly screws and bolts; et cetera. Fiber glass reinforced plastic materials shall be free of excessive resin buildup, inconsistency of glass fibers, wrinkles, blisters, cracks, starved areas, air bubbles, tackiness, gaps, foreign objects, and laps. All interior and exterior surfaces of the container shall be smooth, consistent with other requirements of this specification to avoid sharp protrusions which might tear, cut, or puncture the contents of the container during and after its first operation. Welding, riveting, or other permanent methods of assembly may be used provided that disassembly or reassembly of the component for inspection or overhaul purposes may be accomplished rapidly, safely, and without damage to the assembly. Operation after assembly shall not be dependent upon selective fit of any or all component parts.

3.13.1 Riveting. Riveting operations shall be carefully performed to ensure that the rivets are tight and satisfactorily headed.

3.13.2 Cleaning. The container shall be thoroughly cleaned. All oils and foreign materials which might adversely affect the operation or survival equipment with which it comes in contact shall be removed during and after final assembly.

3.13.3 Protection. The container shall be protected against the entry of all foreign materials.

3.13.4 Lubrication. Permanent-type dry lubrication which will last the expected life of the container and which meets with procuring activity approval shall be used.

3.13.5 Castings. Castings shall be of high quality, clean, sound, free of holes, porosity, cracks, and any other defects.

3.13.6 Welding. Welding shall be carefully performed to ensure that all welded joints have proper penetration, proper bead, and proper strength.

3.13.7 Alignment. The alignment of fitting and mating surfaces shall be accurate to a degree that will permit the proper functioning of the unit within the environmental conditions expected during the service life of the unit.

3.13.8 Screw assemblies. Assembly screws and bolts shall be tight. The word tight means that the screw or bolt cannot be appreciably tightened further without damage or injury to the screw, bolt, or threads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

3.13.9 Soldering and brazing. Soldering and brazing shall be done in accordance with current applicable specifications and shall be carefully performed to ensure that all joints have proper penetration, proper bead, and proper strength.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.2 Classification of tests. The inspection and testing of survival kit containers shall be as follows:

a. Preproduction tests

b. Quality conformance tests.

4.3 Test conditions

4.3.1 Atmospheric conditions. Unless otherwise specified, all tests required by this specification shall be made at an atmospheric pressure of 28 to 32 inches of mercury, a temperature of 77° ±18°F, and a relative humidity of 80 percent or less. Where tests are made with atmospheric pressure or temperature substantially different from these values, proper allowance shall be made for the change in instrument reading.

4.3.2 Test attitude. Unless otherwise specified, the unit shall be tested in the normal operating attitude.

4.3.3 Sequence of tests. Preproduction tests shall be conducted in the following sequence:

a. Examination of product

b. Environmental tests

c. Other tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

4.4 Preproduction testing

*4.4.1 Preproduction test samples. The contractor shall subject six survival kit containers to the preproduction tests specified in 4.4.3. Two containers shall be used for all of the preproduction tests except for the reliability and parachute drop tests. Four containers shall be used in the reliability and longevity tests.

4.4.2 Preproduction samples for the procuring activity. The contractor shall submit two preproduction samples to the procuring activity. Samples tested by the contractor may be submitted.

4.4.3 Preproduction tests. The preproduction tests shall consist of all the tests described under 4.6 and shall be conducted in accordance with the approved preproduction test program (see 6.2).

*4.5 Quality conformance tests. The quality conformance tests shall consist of:

a. Individual tests

b. Sampling plans and tests.

4.5.1 Individual tests. Each container shall be subjected to the following tests as described under 4.6:

a. Examination of product

b. Hardware operation

c. Inner container valve operation

d. Inner container leakage.

4.5.2 Sampling plans and tests

4.5.2.1 Lot. A lot shall consist of 100 containers, or fraction thereof, manufactured under essentially the same conditions and submitted for inspection at substantially the same time.

*4.5.2.2 Sampling plan A. Four containers shall be selected at random from each lot, or fraction thereof, produced and subjected to the following tests as described under 4.6:

a. Interchangeability of critical parts

b. Proof loads

c. Operation (simulated parachute descent).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

4. 5. 2. 3 Sampling plan B. One container shall be selected at random from each lot, or fraction thereof (up to a maximum of four containers per contract or purchase order), and subjected to the following tests as described under 4. 6:

a. Lid retention

b. Container material (test molded case only before assembly of parts).

4. 5. 2. 4 After completion of sampling plan A and B tests, the containers shall be reconditioned, as required, for delivery as serviceable items.

4. 5. 2. 5 Rejection and retest. When one or more items from a lot fail to meet the tests of sampling plans A and B, acceptance of all items in the lot shall be withheld until the extent and cause of failure have been determined. The contractor shall explain fully to the Government representative the cause of failure and the action taken to preclude recurrence. After correction, all of the sampling tests shall be repeated.

4. 5. 2. 5. 1 Individual tests may continue. For production reasons, individual tests or other sampling plans may be continued pending the investigation of a sampling test failure. But final acceptance of the entire lot or lots produced later shall not be made until it is determined that all items meet all requirements of the specification.

4. 5. 3 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all the defects likely to be found and the method of correcting them.

4. 6 Test methods

4. 6. 1 Examination of product. The survival kit container shall be examined visually to determine that it meets the workmanship, identification, marking, finish, material, and weight requirements of this specification.

4. 6. 2 Hardware operation. Hardware shall be tested under the following simulated conditions. Failure to accomplish any specified function shall be cause for rejection of the hardware.

*4. 6. 2. 1 Parachute descent. The dropline connecting plunger device shall be extended simulating seat separation. The kit release handle of the complete container shall unlock with a pull of 20 ±5 pounds. Separation of the container hardware, attachment of the dropline, and opening of the lid lock shall then occur when a maximum pull of 30 pounds is applied to the kit release handle, except that when subjected to the tests in 4. 6. 6, the maximum pull shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

50 pounds. The kit release handle shall separate completely from the container when the maximum force is applied. A 50-pound internal upward force shall be applied to the center of the container lid. A 25-pound force at 120° to the top of the main compartment shall be applied at both sides of the container at the attaching hardware. The test shall be repeated for a total of five tests.

4.6.2.2 Emergency ground egress. The dropline connecting plunger device shall be depressed to simulate installation in an ejection seat. The kit release handle of the complete container shall unlock with a pull of 20 ±5 pounds. Separation of the container hardware shall then occur when a maximum force of 15 pounds is applied to the kit release handle except that during or after exposure to the tests in 4.6.6, the maximum handle operating force shall be 30 pounds. The kit release handle shall separate completely from the container when this force is applied. The dropline shall be locked to the portion of the hardware remaining with the container. This test shall be repeated for a total of 10 operations. A 15-pound load applied in accordance with 4.6.11.1.1 shall be used on each parachute attachment and a 50-pound internal upward force shall be applied to the center of the container lid.

*

4.6.3 Reliability. The reliability requirements of 3.4.3 shall be demonstrated by this test.

*4.6.3.1 Manual operation. Four survival kit containers (test units 1, 2, 3, and 4) shall be subjected to the tests as specified in table II, and the hardware shall be cycled in accordance with the schedule specified therein for a minimum of 240 consecutive successful cycles. The containers shall be loaded and operated as required in 4.6.2.1. No parts may be replaced as preventive maintenance during reliability testing. A failure shall result when one of the following functions does not occur:

a. The dropline connecting plunger device shall be released from its depressed position, and it shall extend and connect the dropline to the harness attachment strap assembly.

b. The handle shall be unlocked by a force of 20 (±5) pounds, operated by a force not to exceed 30 pounds (applied 2 inches from the front), and shall then separate. The operating force for test units 3 and 4 shall not exceed 50 pounds.

c. Simultaneously with handle separation, both lid locks shall disengage, and both harness attachment strap side releases shall separate.

*

4.6.3.2 Reliability acceptance. Failure to perform any function during reliability testing shall constitute one failure. If failures occur, acceptance shall be judged as specified in table III. At the option of the procuring activity, after one failure direction may be given to either continue or repeat the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

* TABLE II. Distribution of Reliability Test Cycles

Tests	Test Unit			
	1	2	3 1/	4
Dust 4. 6. 6. 4			X	10
Humidity 4. 6. 6. 5			X	10
Salt Fog 4. 6. 6. 6			X	20
Vibration 4. 6. 6. 7			X	20
Parachute Descent 4. 6. 2. 1	60	60	60	

1/ "X" denotes exposure to an environmental test without operational cycling before exposure to the next test.

TABLE III. Reliability Accept-Reject Criteria

Minimum Test Cycles for Acceptance	Allowable Number of Failures
240	0
390	1
530	2
670	3

4. 6. 3. 3 Longevity. Survival kit containers, units 1 and 2 of table II, shall be continued through a longevity test after completion of the reliability test. Acceptance shall be judged on the basis of 4. 6. 3. 2. One of the containers shall be operated in accordance with 4. 6. 2. 1 for 240 cycles, and the other container shall be operated in accordance with 4. 6. 2. 2 for 240 cycles. No cable adjustments shall be made or required during this test.

4. 6. 4 Inner container valve operation. The internal volume of the inner container shall be subjected to an air pressure of 0. 5 (+0. 3, -0. 2) psig, and the valve shall open. The valve shall permit a flow of 5 (±1/2) cubic feet per minute when subjected to an inlet static pressure of 1. 5 psi. The valve shall reseat and seal when the inlet pressure is reduced below 0. 3 psi.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

4. 6. 5 Inner container leakage. The inner container at ambient internal pressure shall be submerged in water to a depth of 1 foot for 5 minutes. After the 5 minutes have elapsed, the inner container shall be removed from the water, opened, and visually inspected for the presence of water on the interior of the inner container. Any water inside the inner container shall be cause for rejection. Equivalent testing methods may be used.

4. 6. 6 Environmental tests

4. 6. 6. 1 High temperature operation. The container shall be subjected to high temperature procedures as specified in method 501, procedure I of MIL-STD-810. While at the high temperature, the hardware shall be subjected to and pass one test each in accordance with 4. 6. 2. 1 and 4. 6. 2. 2.

4. 6. 6. 2 Temperature shock. The container shall be subjected to the temperature shock test specified in method 503 of MIL-STD-810. At the end of the specified period, the container shall be returned to room temperature, operated as specified in 4. 6. 2. 1 and 4. 6. 2. 2 for one test, and inspected as specified in 4. 6. 1 for signs of deterioration and damage.

4. 6. 6. 3 Low temperature operation. The container shall be subjected to the low temperature procedures as specified in method 502 of MIL-STD-810. While at the low temperature, the hardware shall be subjected to and pass one test each in accordance with 4. 6. 2. 1 and 4. 6. 2. 2.

*4. 6. 6. 4 Dust. The complete container with CO_2 cylinder, raft, and simulated survival equipment shall be subjected to dust tests in accordance with method 510 of MIL-STD-810. After the test, the container shall be subjected to and pass the tests specified in 4. 6. 2. 1 and 4. 6. 2. 2 for 10 alternate operations.

4. 6. 6. 5 Humidity. The complete container shall be subjected to the humidity test as specified in method 507, procedure I of MIL-STD-810, for not less than 120 hours, and then shall be subjected to and pass one test each in accordance with 4. 6. 2. 1 and 4. 6. 2. 2.

4. 6. 6. 6 Salt fog. The container shall be subjected to the salt fog test in accordance with method 509 of MIL-STD-810. After the test, the container shall be subjected to and pass the tests specified in 4. 6. 2. 1 and 4. 6. 2. 2 for 10 alternate operations.

4. 6. 6. 7 Vibration. The complete container with empty CO_2 cylinder and valve assembly installed shall be mounted on a vibration stand for 6 hours on each of the three axes, two horizontal and one vertical, operating at a frequency ranging from 500 to 2, 500 cycles per minute, with a double amplitude between 0. 034 and 0. 036 inch. After the vibration test, the container shall be subjected

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

to and pass one test each as specified in 4. 6. 2. 1 and 4. 6. 2. 2. The container shall be strapped tightly to the vibration table with 1-3/4-inch cotton or dacron webbing.

4. 6. 6. 8 Shock. The container shall be subjected to the shock test specified in method 516, figure 516. 1-2, procedures I and III, amplification (a) and duration (c) of MIL-STD-810. After the specified testing the container shall be subjected to and pass one test each as specified in 4. 6. 2. 1 and 4. 6. 2. 2.

4. 6. 6. 9 Fungus resistance. The container and the hardware shall be tested for fungus resistance in accordance with method 508 of MIL-STD-810. Any growth shall constitute rejection.

4. 6. 7 Drop test. The container with life raft, charged CO_2 cylinder, and valve assembly installed shall be subjected to simulated parachute opening shock by means of a drop test. The drop test shall consist of dropping the loaded container to the end of a suspension assembly of such height and elasticity as to give the required shock. The container shall be loaded with ballast, simulating survival equipment, to achieve a total weight of 50 pounds. The loaded container shall be secured at the parachute attaching hardware on both sides to a webbing assembly (simulating the parachute harness) which, in turn, is attached to a drop cable. The length and elasticity of the drop system shall be such as to achieve the force specified in 3. 5. 5. Following this test the container shall be operated to determine compliance with 4. 6. 2. 1 and 4. 6. 2. 2 and then shall be subjected to and pass the tests specified in 4. 6. 4 and 4. 6. 5.

*4. 6. 8 Operation (simulated parachute descent). A test subject, fitted with a standard Air Force parachute harness and a fully equipped survival kit container, complete with a one-man raft and weight and bulk to simulate other survival equipment (total weight 45 pounds), shall be suspended by canopy risers on the parachute harness at a point approximately 35 feet from the ground to simulate sustained parachute descent. The dropline connecting plunger device shall be released from its depressed position, and it shall extend and connect the dropline to the harness attachment strap assembly. The test subject shall pull the operating handle with a smooth rapid motion. The handle shall operate the container hardware and shall separate from the container. The container shall drop and function due only to its weight and construction. The harness attachment strap side releases shall separate from the container, the container lid shall separate from the container, the dropline shall deploy without entangelment or restriction, the raft inflation system shall be operated, the raft and container shall be retained on the dropline, and the inner container shall be retained inside the container. The raft shall separate from the container and inflate without damage to the raft. Any hangup or malfunction shall be cause for rejection of the hardware. The test shall be conducted one time on each preproduction and sampling plan item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

4.6.9 Proof loads. The proof loads of 4.6.11.1 and 4.6.11.2 shall be applied to the container. The container shall then be subjected to pass one test each as specified in 4.6.2.1 and 4.6.2.2 and shall be visually inspected to determine there is no damage or permanent deformation.

4.6.10 Lid retention. The lid shall be subjected to an upward load of 700 pounds normal to the lid at the center. The test shall be repeated with the load applied 3 inches to the right of the center point and then 3 inches to the left of the center point. The load shall be applied to a cable or webbing threaded through a hole or slot in the lid and attached to a 6-inch diameter metal plate which bears against the underside of the lid. There shall be no evidence of failure of the lid lock or damage or permanent deformation. The container shall be subjected to and pass one test each as specified in 4.6.2.1 and 4.6.2.2.


4.6.11 Static loads

4.6.11.1 Parachute attachment hardware. The parachute attaching hardware and the container section to which it is attached shall be subjected to load conditions of 1,200 pounds (limit) and 1,800 pounds (ultimate) for each side. The limit loads shall be applied in segments of 45° in a 30° cone about each attachment. Ultimate loads shall be applied to each attachment in the outboard segment only.

4.6.11.1.1 A load of 100 pounds shall be applied to the parachute attaching hardware at a 30° angle towards the front, then aft, and to each side of the container hardware. The kit release handle shall be operated and the container hardware shall release (both under emergency ground egress and parachute descent conditions) with a pull of less than 40 pounds when load is applied as specified in 3.7.2.

4.6.11.2 Container (seating section). The basic container shall be placed with the top surface of the container horizontal to the compression tester so that the load will be applied vertically. A compression test form consisting of a hard rubber block, having an outline as described on figure 2, shall be placed on the container and oriented properly. Compression loads of 4,500 pounds proof and 5,600 pounds ultimate shall be applied to the compression test form for a period of 7 seconds. The loads shall be applied vertically and upward compressing the container between the base of the test stand and the force apparatus. The container shall show no structural failure or permanent deformation after the 4,500-pound load is relieved. The ultimate strength of the container at the section mentioned above shall be 5,600 pounds. The body of the container, lid, closures, and hardware fittings shall function properly after the compression test in accordance with 4.6.2.1 and 4.6.2.2. Distortion and warpage shall be permitted after the 5,600-pound ultimate load is relieved.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

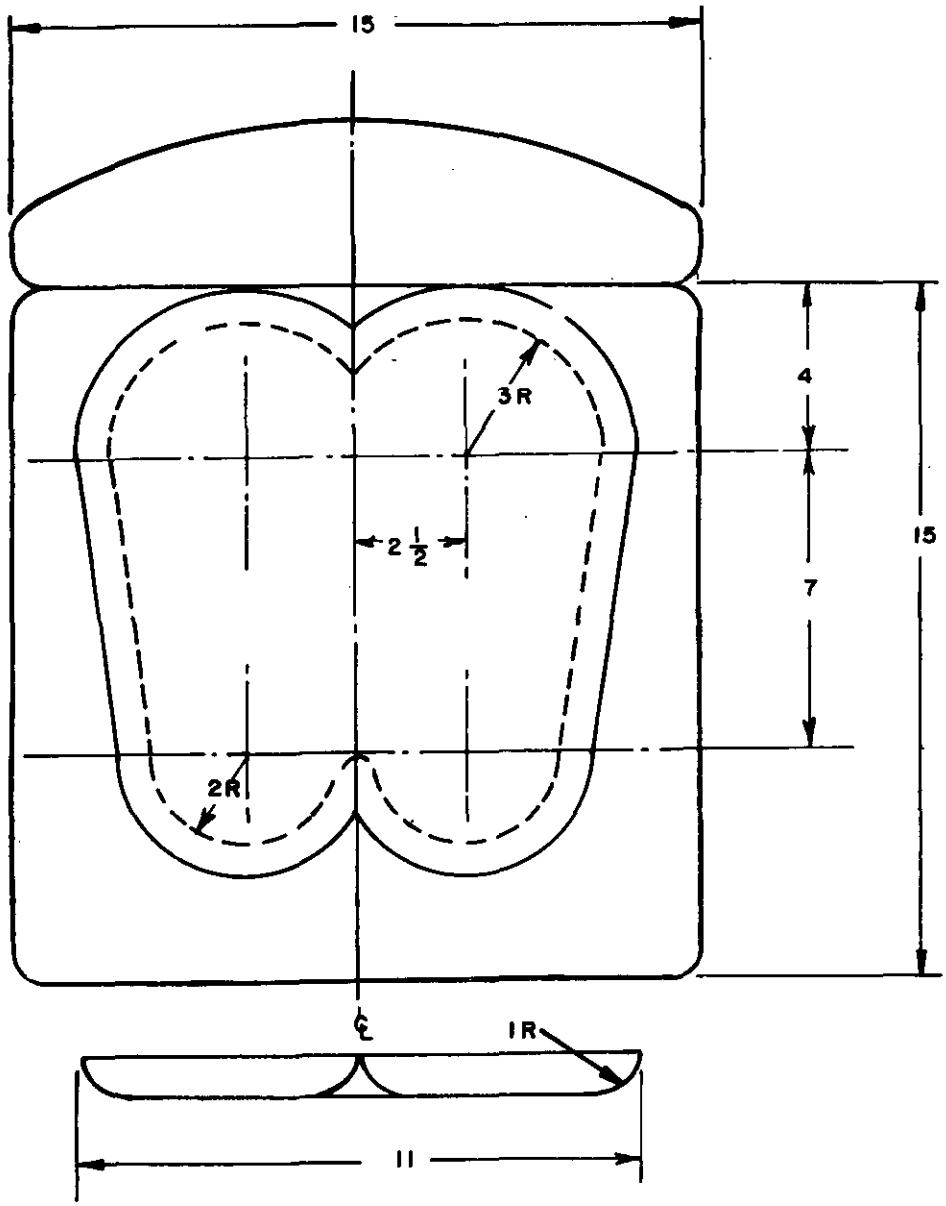

NOTE: DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
TOLERANCES ± 1/4

FIGURE 2. Compression Test Form

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

4.6.12 Interchangeability of critical parts. Functional interchangeability of lids, kit release handles, and container attaching hardware shall be determined by interchanging each item on four containers and actuating for one test each in accordance with 4.6.2.1 and 4.6.2.2.

4.6.13 Container material. If the container is made of fiber glass material, before assembly of any hardware, the container shall be tested in accordance with FED-STD-406 to determine compliance with the requirements of 3.3.4.1. Four coupons shall be taken randomly from each container.

*

*4.7 Inspection of preparation for delivery requirements. Sample items or packs and the inspection of the preservation, packaging, packing, and marking shall be in accordance with the requirements of section 5, or the documents specified therein.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. The survival kit containers shall be preserved and packaged one each in accordance with MIL-P-116, method III, in a container conforming to the requirements of PPP-B-636.

5.1.2 Level C. The survival kit containers shall be packaged in accordance with the manufacturer's standard commercial practice.

5.2 Packing. Packing shall be levels A, B, or C, as specified (see 6.2).

5.2.1 Levels A, B, and C. Unless otherwise specified, containers shall be unitized in accordance with MIL-STD-147.

5.3 Marking. Marking shall be in accordance with MIL-STD-129.

6. NOTES

*6.1 Intended use. The CNU-68B/P survival kit container (with seat cushion in accordance with Drawing 68E280) covered by this specification is intended for use with the F-5 aircraft. The CNU-155/P survival kit container (with seat cushion in accordance with Drawing 70165) covered by this specification is intended for use with the B-52 aircraft.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

*6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification

b. Type of survival kit container and part number of seat cushion required (see 1.2)

c. List of interchangeable components and assemblies

d. Preproduction requirements

e. Preproduction test program to be submitted in accordance with AFSCM/AFLCM 375-1 procedures (see 4.4.3)

f. Applicable levels of preservation, packaging, and packing (see section 5).

6.3 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and the relationship to the last previous issue.

Custodian:
Air Force - 11

Review activity:
Air Force - 82

Preparing activity:
Air Force - 11

Project No.: 4220-F168

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-158/12528

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD, FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

AFLC–WPAFB–OCT 67 2M

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:30Z
Check the source to verify that this is the current version before use.