INCH POUND

MIL-T-38350D
24 April 1992

SUPERSEDING
MIL-T-38350C
01 January 1991

MILITARY SPECIFICATION

TROUSERS PARARESCUE CWU-15/P

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of pararescue trousers with the designation of CWU-15/P.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

1.2 Classification. The trousers shall be of the following sizes as specified (see 6.2):

Schedules of Sizes

Small
Medium
Large
Extra-Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

*2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-F-106	Fastener, Slide, Interlocking
V-T-295	Thread, Nylon
KK-L-2004	Leather, Cattlehide, Deerskin, and Horsehide, Chrome Tanned
DDD-L-20	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-F-320	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes

MILITARY

MIL-B-543	Buckles, Tongueless and Web strap
MIL-R-3390	Ring, Dee
MIL-W-4088	Webbing, Textile, Woven Nylon
MIL-C-4294	Cloth, Twill, Nylon
MIL-C-5040	Cord, Fibrous, Nylon
MIL-A-5540	Adhesive, Polychloroprene
MIL-W-5625	Webbing, Textile, Nylon, Tubular
MIL-S-6790	Suspenders, Trousers (Suspenders, Flying Suit)
MIL-C-7219	Cloth, Duck, Nylon
MIL-B-17757	Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-F-21840	Fastener Tapes, Hook and Loop, Synthetic

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:26Z
Check the source to verify that this is the currentversion before use.

STANDARDS

FEDERAL

FED-STD-751	Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized Unit Loads
MIL-STD-2073/1	DOD Material Procedures for Development and Application of Packaging Requirements
MIL-STD-2073/2	Packaging Requirement Codes
MS20230	Grommets, Metallic, Plain and Spur, with Washers, Type I and Type III
MS27980	Fasteners, Snap, Style 2 (Regular Wire Spring Clamp Type)

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

*2.2 Non-Government publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM D 3951 Standard Practice for Commercial Packaging

(Applications for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:26Z
Check the source to verify that this is the current version before use.

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades For Sewing Threads

(Applications for copies should be addressed to the Color Association of the United States, 409 W 44th St., New York, NY 10016-0927).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

*2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

*3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

*3.2 Basic Material. The basic material shall conform to class 3, type III of MIL-C-7219, except that the color shall be Sage Green USAF Color Shade No. 1535.

3.2.1. Thread. The thread shall conform to type 1, class 1, size E of V-T-295. The color of the thread shall match the color of the basic material (see 3.2).

3.2.2 Fastener tape. The fastener tape (hook and loop) shall conform to class 1, type II of MIL-F-21840. The width of the tape shall be 2 inches, and color options shall be white, gray or black. The length of the fastener tape shall be as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:26Z
Check the source to verify that this is the current version before use.

Table I. Fastener tape.

Type	Location	Length of tape, inches				No. Required
		Small	Medium	Large	Extra Large	
Loop	Knee	13	13	13	13	4
Loop	Hip	8-3/4	10	10-3/4	11-3/4	4
Loop	Center back	9-1/2	10	10-1/2	11	1
Loop	Front piece	7	7	7	7	1
Hook	Crotch pad, back	9-1/2	10	10-1/2	11	1
Hook	Crotch pad, front	7	7	7	7	1
Hook	Hip pads	8	8-3/4	9	9-3/4	4
Hook	Knee pads	7	7	7	7	4

*3.3 Slide fastener. The slide fastener for the rope pocket shall conform to type I, style 7, size MHS, with a stirrup pull, of V-F-106. The slide fastener for the leg closure shall conform to type IV, style 5 (left leg), and style 6 (right leg), size MHS, with stirrup pull, of V-F-106. The chain shall be brass, aluminum, or zinc alloy. The tape shall be cotton or cotton warp and nylon filling and shall be mildew resistant treated in accordance with V-F-106. The finish for metal parts shall be dull chromate if zinc; black chemical if brass; and colored anodized if aluminum. The lengths of the slide fasteners shall be as specified in Table II.

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:26Z
Check the source to verify that this is the current version before use.

Table II. Lengths of slide-fastener chain, inches.

Location	Length			
	Small	Medium	Large	Extra Large
Leg closure	42	43	44	45
Pocket closure	18	18	18	18

*3.3.1 Snap fasteners. The snap fasteners shall conform to MS27980-1B (button), MS27980-6B (socket), MS27980-7B (stud), and MS27980-8B (eyelet).

*3.3.2 Grommets. The grommets used in the leg pockets shall conform to MS20230-B10.

*3.3.3 Dee Rings. The dee rings used on the seat-strap assembly shall be configuration L, class 2 of MIL-R-3390.

*3.3.4 Buckles. The buckles used on the leg strap assembly shall conform to type IV, class 1, one inch, of MIL-B-543.

*3.3.5 Suspenders. A pair of suspenders shall be attached to each pair of trousers. The suspenders shall conform to type I of MIL-S-6790, except that the wire buttonholes at the back shall be removed.

*3.3.6 Cord for knife pocket. The cord for the knife pocket shall conform to type IA of MIL-C-5040, and the color of the cord shall be white or natural. The cord shall be 60 inches (plus or minus 1 inch) long and shall be seared at each end to prevent fraying.

*3.3.7 Webbing.

*3.3.7.1 Leg-Strap assembly. The material for the leg-strap assembly, consisting of the crotch strap and the stirrup strap, shall be nylon webbing 1 inch wide, conforming to MIL-W-5625. The color shall be white or natural. The cut length of the webbing shall be in accordance with the applicable marker patterns for each trouser size. The ends of the webbing shall be seared to prevent fraying.

*3.3.7.2 Seat strap. The material for the seat strap shall conform to type IV, class 1 shuttle or 1A shuttleless of MIL-W-4088. The color of the webbing shall be white or natural. The cut length of the webbing shall be as specified in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

Table III. Cut length of seat strap webbing, inches.

Length			
Small	Medium	Large	Extra
79 ± 1	84 ± 1	89-1/2 ± 1	95 ± 1

*3.3.7.3 Pocket flaps. The material for the accessory pocket flaps shall conform to class 1, type VI of MIL-W-4088, and the color of the webbing shall be white or natural. The flaps shall be cut in accordance with the marker pattern. The ends of the webbing shall be seared to prevent fraying.

*3.3.8 Padding material. The material for the protective padding (crotch, hip, and knee pads shall be Ensolite, type AH, 1/2 inch thick (manufactured by U.S. Rubber Co., 238-T North 9th Street, Brooklyn, N.Y. 11211) or equal providing that the material does not emanate offensive odors (see 6.5).

*3.3.9 Cement. The cement for fabricating the protective padding shall be class 1, 2, or 3 of MIL-A-5540. The color of the cement is optional.

*3.3.10 Binding. The binding shall be cut from cloth conforming to type II, class C of MIL-C-4294. The color of the binding shall match the color of the base material.

3.4 Design. A quick-release slide-fastener closure shall be installed on each leg to provide the wearer a quick-doffing capability. The trousers shall have a patch pocket, a knife pocket, a radio pocket, a battery pocket, and a rope pocket. All pockets for accessory items shall be located on the right side trouser leg. Protective leg straps and a seat to accommodate a let-down rope shall be provided for use in the event of tree landings. Each pair of trousers shall have detachable protective pads for the crotch, the hips, and the knees. The pads shall be secured in place by hook and loop fastener tape. Each pair of trousers shall have elastic suspenders.

*3.4.1 Figures. Figures 1 through 8 are furnished for information only. In the event of conflict between the written specification and the figures, the written specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

*3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are allowed on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification. The standard patterns provide an allowance of 1/2 inch for all seams. Unless otherwise indicated in Table V, seams shall be in accordance with these seam allowances. The patterns for the protective pads are the finished size.

3.5.1 Pattern parts. The component parts of the trousers shall be cut from the material specified in accordance with the number of parts listed in Table IV.

TABLE IV. Pattern parts.

Material	Nomenclature	Cut parts
Basic Material (see 3.2)	Trousers	2
	Waistband	2
	Left leg strap reinforcement	1
	Knife pocket retainer	1
	Knife pocket	1
	Radio pocket	1
	Radio battery pocket	1
	Patch pocket	1
	Reinforcement patch for leg pocket	1
	Rope pocket	1
	Trouser front piece	1
Padding material (Ensolite) (see 3.3.8)	Crotch pad	1
	Hip pad	2
	Knee pad	2
Not applicable	Markers	
	Accessory pockets	
	Seat strap marker	
	Webbing marker (flaps and cutting)	2
	Crotch strap marker and cutting	1
	Stirrup strap marker and cutting	2
Webbing or leather reinforcement for rope pocket.	(no pattern)	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

*3.6 Manufacturing operations requirements. The trousers shall be manufactured in accordance with operation requirements specified in Table V. The contractor is not required to follow the exact sequence of operations provided the finished trouser is identical to that produced by following the sequence as listed in Table V. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification.

3.6.1 Stitches, seams and stitchings. Stitches, seams and stitchings used in the construction of the trousers shall conform to FED-STD-751. Whenever two or more methods, seams, or stitchings are specified for the same operation, any one of them may be used. All seams shall start and finish evenly. Seam allowances shall be maintained so that no raw edges, run-offs, twists, pleats, puckers, or open seams will occur. Thread tension shall be maintained so that there will be no tight or loose tension. The looper thread (under thread) of stitch type 401 shall be on the inside of the trousers. The ends of all seams and stitching not caught by other seams shall be backstitched a minimum of 1/2 inch. Thread breaks may be repaired using a stitch type 301 and overstitching 1/2 inch at each end of the break.

3.6.2 Double rows of stitching. Unless otherwise specified herein, all double rows of stitching specified in Table V shall be 1/4 to 5/16 inches, Stitching gauge, 1/16 to 1/8 inch from the edge or folded edge as applicable.

3.6.3 Automatic stitching. Automatic stitching machines may be used to perform any of the required stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met, and at least three or more tying, or overlapping, or back stitches are used to secure the end of stitchings.

3.7 Labels. Each pair of trousers shall have a combination identification size and laundering label sewn on the inside of the trousers at the center back seam, approximately 1/4 inch below the waistband. The label shall conform to class 14, type VI, of DDD-L-20 and shall show "good" colorfastness to laundering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

3.7.1 Laundering instruction label. The laundering instruction label shall contain the following information:

TROUSERS, PARARESCUE CWU-15/P.

1. Remove all crotch, hip, and knee pads.

2. Machine Washing. Use Permanent Press Cycle. Wash in warm water with mild detergent.

3. Hand washing. Wash in warm water using mild detergent. DO NOT WRING OR TWIST. Rinse in clean warm water.

4. DO NOT USE CHLORINE BLEACH OR STARCH.

5. Dry at low heat (do not exceed 130° F). After drying, tumble at room temperature for 10 minutes. Remove immediately from dryer. To drip dry, remove from water and place on a rust-proof hanger.

DO NOT REMOVE THIS LABEL

3.7.2 Protective pads label. The protective pads shall be marked with pad name (hip, crotch, and knee pad) and size in accordance with type IV of DDD-L-20.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

TABLE V. Manufacturing operations. 1/

No.	Description of Operation	STCH TYPE	SEAM/ STCH TYPE	STCH IN
1.	Cutting. a. All component parts of the trousers shall be cut in strict accordance with the patterns which control size, shape, and warp direction and provide notch and drill marks for use in assembling the trousers. Except for the reinforcement pieces and the necessary pockets, all components cut from the basic material shall be cut from one continuous piece of material. Drill holes, if used, shall not appear on the outside of the finished garments. NOTE: The nylon twill cloth has a tendency to ravel easily, therefore the raw edges may be overedge stitched prior to assembly with a 504 or 505 stitch. b. Fastener tapes shall be cut to the applicable lengths specified in Table I. c. Webbing components shall be cut in accordance with Table III. d. The bias binding for the knife pocket shall be cut 1 to 1-1/8 inches wide.			
2.	Replacement of defective components. * a. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in 4.4.2.1 shall be removed from production and replaced with non-defective and properly matched components.			
3.	Marking. a. All components parts of the trousers shall be marked ticketed or bundled to insure a uniform shade throughout the trousers and proper assembly of the trousers.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

TABLE V. Manufacturing operations.(Continued) 1/

No.	Description of Operation	STCH TYPE	SEAM/ STCH TYPE	STCH IN
4.	Mark location of seat strap.			
	a. Using the seat strap marker pattern, trace the stitching line for the top edge of the seat strap webbing on the inside of each leg panel (see Figure 1).			
5.	Mark location of accessory pockets.			
	a. With the accessory pocket marker pattern oriented on the rope pocket drill marks of the right leg panel, mark the stitching locations for the radio, the battery, and the patch pockets.			
6.	Mark location of knife pocket.			
	a. Use the pocket stitching location indicated on the knife pocket reinforcement piece to mark off the pocket location on the outside surface of the right leg panel.			
7.	Attach reinforcement piece.			
*	a. Fold under 1/2 inch at the top and the side edges of the knife pocket reinforcement piece and stitch to the underside of the right front 1/16 to 1/8 inch from the edge as indicated by the marks on the patterns (see Figure 2).	301	LSd-1	8-10
*	b. Fold under 1/2 inch the four edges of the reinforcement patch for leg pocket piece and stitch to the underside of the right front 1/16 to 1/8 inch from the edge as indicated by the marks on the pattern. The top edge of the reinforcement piece shall overlap and cover the bottom raw edge of the knife pocket reinforcement piece (see Figure 2).	301	LSd-1	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

TABLE V. Manufacturing operations.(Continued) 1/

No.	Description of Operation	STCH TYPE	SEAM/ STCH TYPE	STCH IN
	c. Fold under 1/2 inch top and side edge of the left stirrup reinforcement piece and stitch to the underside of the left front 1/16 to 1/8 inch as indicated by the patterns. The bottom raw edge of the reinforcement piece shall be covered by the bottom hem caught in the hem stitching (see Figure 3).	301	LSd-1	8-10
8.	Make and install stirrup straps			
	a. Fold the lower end of the stirrup strap through the buckle as indicated on the stirrup strap marker pattern and stitch the buckle in place, using a box -cross stitching pattern (see Figures 3 and 4).	301		8-10
	b. Stitch the stirrup straps to the leg panels at the marked locations (see Figure 3 and 4 stitching details).	301		8-10
9.	Attach loop fastener tape at knee location			
	a. Position the fastener tapes on the inside of each leg panel as indicated by the pattern marks, and stitch around all four sides with a single row of stitching, 1/16 to 1/8 inch from the edge.	301		8-10
10.	Make radio and battery pockets and flaps			
	a. Hem the top of the pocket as indicated by the notches on the pattern with the raw edge turned in and single stitch 1/16 to 1/8 inch from the edge.	301	EFb-1	8-10
	b. Install snap fastener components (MS27980-7B and MS27980-8B) and the drain grommet (MS20230-B10) at the locations indicated on the pattern.			
*	c. Join the corner seams, with a single row of stitching, 3/8 inch from the edge. Turn the pocket right side out and raise stitch with a single row of stitching 1/16 to 1/8 inch from the folded edge.	301	LSq-2	8-10

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T12:26Z
Check the source to verify that this is the currentversion before use.

TABLE V. Manufacturing operations.(Continued) 1/

No.	Description of Operation	STCH TYPE	SEAM/ STCH TYPE	STCH IN
	d. Fold the webbing pocket flaps as indicated by the marker pattern.			
	e. Install the snap fastener components (MS27980-1B and MS27980-6B) on the flap at the indicated location.			
11.	Make patch pocket			
	a. Hem the tops of the pockets as indicated by the notches on the patterns with the raw edge turned in and single stitch 1/16 to 1/8 inch from the edge.	301	EFb-1	8-10
	b. Install the snap fastener components (MS27980-1B and MS27980-6B) and the drain grommets (MS20230-B10) at the locations indicated.			
12.	Make rope pocket (see figure 5)			
	a. Join the corner seams, with a single row of stitching, 1/2 inch from the edge. Turn the pocket right side out and raise with a single row of stitching 1/16 to 1/8 inch from the edge.	301	LSq-2	8-10
	b. Slit the tops of the pockets as indicated on the pattern, turn under the slit 1/4 to 3/8 inch, and sew to the slide fastener with two rows of stitches. The slide fastener shall close to the front.	301	LSb-2	8-10
	c. Reinforce the ends of the slide fastener, covering the "T" cuts, with a leather or a webbing tab. When webbing is used the end shall be fused to prevent raveling. The size of the tab shall be 1-3/4 inches wide by 1-1/2 inches long. Rectangular box stitch using 1/2 to 5/8 inch gage.	301		8-10
13.	Install accessory pockets (see figure 6)			
	a. Install the drain grommets (MS20230-B10) at the indicated locations.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

TABLE V. Manufacturing operations.(Continued) 1/

No.	Description of Operation	STCH TYPE	SEAM/ STCH TYPE	STCH IN
13.	b. Locate the webbing flaps for the radio and the battery pockets in line with and centered between the top drill marks, with the fused ends facing towards the top of the trousers. Sew in place with a double row of stitching.	301	LSa-2	8-10
	Locate the webbing flaps for the radio and the battery pockets in line with and centered between the top drill marks, with the fused ends facing towards the top of the trousers. Sew in place with a double row of stitching.	301	LSa-2	8-10
	c. Attach the radio, the battery, and the patch pockets at the indicated locations by stitching the sides and and the bottom of the pocket with a single row of stitching 1/16 to 1/8 inch from the folded edge.	301	LSd-1	8-10
	d. Install the snap fastener components (MS27980-7B and MS27980-8B) on the leg panel to coincide with the fastener components installed on the patch pocket.			
14.	Install rope pocket			
	a. Attach the rope pocket to the leg panel (over the accessory pockets) at the stitching location on the pattern. sew in place with a double row of stitching (see figure 5).	301	LSd-2	8-10
15.	Hem bottoms of leg panels			
	a. Fold the bottom edge to the inside as indicated by the notch marks; turn the raw edge 1/4 inch and sew with a single row of stitching, 1/16 to 1/8 inch from the folded edge.	301	EFb-1	8-10
16.	Join leg panels			
	a. Sew the seat seam with a double row of stitching.	301	LSc-2	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

TABLE V. Manufacturing operations.(Continued) 1/

No.	Description of Operation	STCH TYPE	SEAM/ STCH TYPE	STCH IN
17.	Attach back fastener tape.			
	a. Locate the back fastener tape over the seat seam as indicated by the pattern marks and stitch around all four sides 1/16 to 1/8 inch from the edge.	301		8-10
18.	Prepare the front piece.			
	a. Locate the front fastener tape over the front seam on the underside of the front piece as indicated by the pattern marks, and stitch around all four sides 1/16 to 1/8 inch from the edge.	301		8-10
	b. Fold the top edge of the inside as indicated by the notch marks. Turn the raw edge under 1/4 inch and sew with a single row of stitching, 1/16 to 1/8 inch from the top folded edge.	301	EFb-1	8-10
19.	Attach the front piece to the trousers			
	a. Match the notch mark on the front piece with the seat seam and stitch to the leg panels with a single row of stitching 1/2 inch from the edge	301	LSq-3(a)	8-10
	b. Raise stitch the seam on the front piece with a double row of stitching.	301	LSq-3(b)	8-10
20.	Make waistband			
	a. Join the waistband pieces, with a single row of stitching, 1/2 inch from the edge, starting at the notch and continuing around the extension, the top, and down the straight end. Turn right side out and work out the seams.	301	SSa-1	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

TABLE V. Manufacturing operations.(Continued) 1/

No.	Description of Operation	STCH TYPE	SEAM/ STCH TYPE	STCH IN
21.	Attach waistband to trousers			
	a. Fold the front edge of the left leg panel 1/2 inch to the inside and match the fold with the waistband notch. Fold the front edge of the right leg panel 1/2 inch to the inside and match the fold with the finished square end of the waistband. Stitch the inner panel of the waistband to the inside of the trousers, with a single row of stitching 1/2 inch from the edge.	301	SSa-1	8-10
	b. Turn in the edge of the outer waistband panel 1/2 inch and stitch to the outside of the trousers, with a double row of stitching.	301	LSb-2	8-10
	c. Stitch around the extension and the top of the waistband with a single row of stitching 1/16 to 1/8 inch from the edge.	301	SSe-2(b)	8-10
22.	Install slide fasteners			
	a. Turn in the raw edge of the leg panels 1/2 inch and superimpose on the slide fastener tape. Stitch in place with a double row of stitching.	301	LSb-2	8-10
	b. Prior to installing the slide fasteners on edges, stitch all raw edges on leg panels which are to be joined to slide fasteners. NOTE: The slide fastener shall be installed with the quick release stops located on each side of the front piece, 3/4 to 1 inch below the top edge.	504 or 505	EFd-1	8-10
23.	Install the seat strap			
	a. Thread the seat strap webbing through the dee rings a distance of 7 inches (plus or minus 1 inch). Stitch to the trousers in accordance with Figure 1.	301		8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

TABLE V. Manufacturing operations.(Continued) 1/

No.	Description of Operation	STCH TYPE	SEAM/ STCH TYPE	STCH IN
24.	Attach hip pad fastener tapes			
	a. Locate and stitch the loop tapes similar to the manner specified in operation No.8. The loop tapes shall be installed subsequent to the strap operation.			
25.	Make and install knife pocket			
	a. Fold the pocket lengthwise, face side out and raw edges even. Bind the pocket all around with bias cut fabric that is 1 inch wide (see 3.3.10).	301	BSc-1	8-10
	b. Install the snap fastener components (MS27980-1B and MS27980-6B) and the grommet (MS20230-B10) at the locations indicated, through both plies of the pocket.			
	c. Install the knife pocket on the leg panel in accordance with the pattern marks and stitch around the sides and bottom with a double row of stitching.	301		8-10
	d. Install the snap fastener components (MS27980-7B and MS27980-8B) on the leg panel to coincide with those of the knife pocket flap.			
	e. Tie the cord (see 3.3.6) for the knife to the pocket through the grommet with a square knot and stow the cord in the knife pocket.			
26.	Install crotch strap			
	a. Place the crotch strap on the leg panel so that the pattern marks of the strap correspond to the drill marks on the leg panels. Stitch in place as shown in Figure 7.	301		8-10
27.	Sew labels			
	a.Locate the labels on the trousers (see 3.7) and stitch around all four sides 1/16 to 1/8 inch from the edge.	301	LSbj-1	8-10

Source: https://assist.dla.mil -- Downloaded: 20260-21T12:26Z
Check the source to verify that this is the current version before use.

TABLE V. Manufacturing operations.(Continued) 1/

No.	Description of Operation	STCH TYPE	SEAM/ STCH TYPE	STCH IN
28.	Attach suspenders			
	a. Stitch the suspenders to the inside of the waistband in accordance with the marked locations. Sew 1/16 to 1/8 inch around the edge of the leather buttonhole end finishing straight across the top of the leather buttonhole end with a double row of stitching.	301	SSa-1	8-10
	b. Secure each attachment point with a cross box stitching pattern of the maximum permissible size.	301		8-10
29.	Install snap fasteners			
	a. Install components MS27980-1B and MS27980-6B (total of four each) on the left side (extension) of the waistband at the marked locations.			
	b. Install components MS27980-7B and MS27980-8B on the right side waistband to correspond with the location on the waistband extension.			
30.	Make trouser pads			
	a. Cement the darts closed on the knee pads.			
	b. Cement the hook tapes to the knee, hip,and crotch pads in accordance with pattern marks.			
31.	Cleaning			
	a. Trim all ends of stitching and remove loose threads.			
	b. Remove all spots and stains.			
	c. Remove all shade tickets.			

1/ The abbreviations used in Table V are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

Stch - Stitch
In - Inch
Ndl - Needle
Bob - Bobbin
Lpr - Looper
Mchne - Machine
Brtck - Bartack
Comrcl - Commercial
Smlr - Similar
Btn - Button
Btnhl - Buttonhole
Incl - Including
Dbl - Double

3.9 Finished measurements. The finished measurements of the trousers shall conform to Table VI with all pads removed.

TABLE VI. Finished measurements, inches

Measurement 1/	Size				Tolerances	
	Small	Medium	Large	Extra Large	Plus	Minus
Front Length	42	43	44	45	1/2	3/4
Half Waist	21-1/4	23-1/4	25-1/4	27-1/4	1/4	1/2

1/ The measurement of the front length shall be taken, along the slide fastener seam, from the top of the waistband to the bottom of the trouser leg. The measurement of the half waist shall be taken along the waistband seam, from side to side, with the trousers laid flat. The slide fasteners shall be closed, and the waistband shall be fastened in the normal as worn position.

3.10 Workmanship. The finished trousers shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable quality levels.

*3.11 Recycled materials. It is encouraged that recycled materials be used when practical as long as the materials meet the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:26Z
Check the source to verify that this is the currentversion before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3)
2. Quality conformance inspection (see 4.4)

4.3 First article inspection. The first article, submitted in accordance with 3.1, shall be inspected as specified in 4.4.2, and examined for compliance with design, construction, workmanship and dimensional defects as specified in Table VI.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 through 4.4.2.3. The sample unit for this examination shall be one trouser assembly and one complete set of protective pads. The inspection levels shall be II of MIL-STD-105 for 4.4.2.1 and 4.4.2.2, and S-3 of MIL-STD-105 for 4.4.2.3. The acceptable quality level (AQL) for 4.4.2.1 and 4.4.2.2 shall be 2.5 defects per 100 units (dhu) for major defects, 15.0 dhu for major and minor A (combined) defects, and 25.0 dhu for total (combined major, minor A, and minor B) defects. The AQL for 4.4.2.3 shall be 4.0 dhu for defects (one class).

4.4.2.1 General defects. General defects shall be classified as specified in Table VII.

TABLE VII. General Defects.

No.	Defects	Major	Minor A	Minor B
I.	Material defects and workmanship damages. Material defects and workmanship damages resulting in non-weakening condition shall not be classsified as defects. Material defects and workmanship damages resulting in conditions that definitely weaken the structure of the trousers or that are located conspicuously so that they are clearly noticeable shall be classified as follows:			
	a. Any hole, smash, float or loose and weakening slub.	101		
	b. Cut, tear, mend, burn, or needle chew.	102		
II.	Cleanness			
	a. Any spot or stain on the outside clearly noticeable.		201	
	b. Thread ends not trimmed or loose threads not removed throughout trousers.			301
III.	Component and assembly			
	a. Any component part or required operation omitted (unless otherwise classified herein).	103		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

TABLE VII. General Defects. (Continued)

No.	Defects	Major	Minor A	Minor B
IV.	Cutting			
	a. Any component part not cut in accordance with directional lines as indicated on patterns or in accordance with specification requirements.	104		
V.	Seaming and stitching			
	a. General			
	(1) Seam twisted, puckered, or pleated (unless otherwise classified herein).			302
	(2) Any part of trousers caught in any unrelated operation or stitching.	105		
	(3) End of seam, when not caught in other seam or stitching, backedtacked less than 1/4 inch.		202	
	(4) Thread breaks (all stitch types) stitiched less than 1/2 inch beyond each end of break.		203	
	b. Gage of stitching (edge, raised, or double stitching).			
	(1) Unevenly gaged or stitching not uniform.		204	
	(2) Beyond width specified or varies more than 1/16 inch when no range is specified.			303
	(3) Edge or raised stitching sewn too close to edge resulting in damage to cloth.	106		
	c. Open seams (one or more broken, skipped, or runoff stitches on a joining seam shall constitute an open seam. On double stitched seams, a seam shall be considered open when either side of the seam is open).			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

TABLE VII. General Defects. (Continued)

No.	Defects	Major	Minor A	Minor B
	(1) On joining seams.			
	up to and including 1/4 inch.			304
	more than 1/4 inch to and including 1 inch.		205	
	more than 1 inch.	107		
	(2) On hems			
	more than 1/4 inch.			305
	d. Raw edges (raw edges not caught in stitching shall be classified as open seams).			
	(1) On outside			
	1/4 inch to 3/4 inch inclusive.		206	
	more than 3/4 inch.	108		
	(2) On inside			
	more than 2 inches, except on the crotch seam.		207	
	(3) Raw edge protruding from folded edge on outside of double needle seam more than 2 inches.			306
	e. Run offs.			
	(1) Joining seams resulting in an open seam shall be classified as an open seam.			
	(2) Edge raised stitching (when not resulting in an open seam).			
	1/4 inch to 1/2 inch inclusive.			307
	more than 1/2 inch.		208	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

TABLE VII. General defects. (Continued)

No.	Defects	Major	Minor A	Minor B
	f. Seam and stitch type.			
	(1) Not specified seam or stitch type.		209	
	g. Stitch tension.			
	(1) Loose tension resulting in a loose seam.	109		
	(2) Loose tension on edge or raised stitching, resulting in loosely exposed thread on top thread.		210	
	(3) Tight tension, i.e., stitches break when normal strain is applied to seam or stitching.	110		
	h. Stitches skipped or broken.			
	(1) On edge or raised stitching, i.e. seam is seamed, turned, and stitched.			
	1/2 inch to 3/4 inch inclusive.			308
	more than 3/4 inch.		211	
	i. Stitches per inch (to be scored only when conditions exists on major portion of seam).			
	(1) Less than minumum specified on all seams except stitching of label.			
	one stitch.			309
	two stitches.		212	
	three or more stitches.	111		
	(2) Two or more less than minimum specified on label.			310
	(3) Any number of stitches in excess of maximum specified.			311

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

Table VII. General defects. (Continued)

No.	Defects	Major	Minor A	Minor B
VI.	Bartacks			
	a. One missing, loose, or misplaced, not serving intended purpose.			312
	b. Two or more missing, loose or misplaced, not serving intended purpose.		213	
VII.	Snap fasteners			
	a. Missing, loose, or not functioning properly.	112		
	b. Improperly located on trousers.	113		
	c. Clinched too tightly, cutting surrounding fabric.	114		
VIII.	Slide fastener			
	a. Defective, will not function.	115		
	b. Stitched too close to metal chain, restricting slider.	116		
	c. Thong omitted or not specified type.			313
	d. Size of reinforcement tab (leather or webbing) at end of slide fastener for rope pocket less than specified for width and length.			314

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

4.4.2.2 Detailed defects applicable to specific parts of trousers. Detailed defects applicable to specific parts shall be classified as specified in Table VIII.

TABLE VIII. Detailed Defects.

No.	Defects	Major	Minor A	Minor B
	OUTSIDE OF TROUSERS			
I.	Waistband			
	a. Fullness or twist on outside.		201	
	b. Width less than 3 inches or more than 4 inches.		202	
	c. Studs and sockets not aligned, causing waistband to bulge when fastened.		203	
II.	Pockets			
	a. Any pocket omitted.	101		
	b. Pocket poorly shaped.		204	
	c. Grommets omitted on knife pocket.	102		
III.	Crotch strap installation			
	a. Omitted.	103		
	b. Insecurely stitched or one cross box stitching omitted.		205	
	c. Two or more cross box stitchings omitted.	104		
	d. Crotch strap unequal in length by 2 inches.		206	
	e. Crotch strap unequal in length by more than 2 inches.	105		
	INSIDE OF TROUSERS			
IV.	Identification and laundering instruction labels			
	a. Missing, incorrect, or illegible.		207	
	b. Not stitched on all four sides.			301

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

TABLE VIII. Detailed Defects. (Continued)

	Defect	Major	Minor A	Minor B
V.	Leg and knife reinforcement pieces			
	a. Omitted	106		
	b. Not securely stitched.		208	
VI.	Seat strap			
	a. Omitted or one or both Dee rings missing.	107		
	b. Strap not securely stitched.		209	
VII.	Fastener tapes (Hook and Loop)			
	a. Any fastener tape missing or improperly installed on trousers.	108		
	b. Fastener tape not securely stitched on all sides.		210	
VIII.	Protective padding			
	a. Cemented joints insecure.		211	
	b. Fastener tape not securely cemented to protective pad.		212	
	c. Fastener tape missing from protective pad.	109		
	d. Label missing, incorrect, or illegible.		213	

4.4.2.3 Finished measurements. Any finished measurement deviating from the measurements specified in Table VI shall be classified as a finished measurement defect. Leg lengths (on the same pair of trousers) uneven by more than 1/2 inch shall be classified as a finished measurement defect.

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 2.5 dhu defects per hundred units in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component misssing, damaged, or not as specified.
Workmanship	Inadequate, application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

4.4.4 Palletization examination. An examination shall be made to determine that palletization complies with the Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1, and the acceptable quality level, (AQL) expressed in terms of defects per hundred units, shall be 6.5 dhu in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

5. PACKAGING

*5.1 Preservation. Preservation shall be level B or C or Industrial, as specified (see 6.2).

*5.1.1 Level B or C. Each pair of trousers shall be neatly folded, so that the length dimension is approximately 23 inches, and placed into a snug fitting polyethylene bag. The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The bag shall be fabricated of clear polyethylene film having a minimum thickness of 0.00125 ± .00025 inch. The protective pads shall be inserted in the bag and the bag shall be closed by heat sealing. Prior to or during final closure, excess air shall be expelled from the bag.

* 5.1.2 Industrial. Trousers shall be preserved in accordance with the applicable requirements of ASTM D 3951.

* 5.2 Packing. Packing shall be level B, C or Industrial as specified (see 6.2).

* 5.2.1 Level B. Five pairs of trousers, of one size only, preserved as specified shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class weather resistant, grade V3c, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather resistant, variety DW, grade V15c of PPP-F-320. Packaged trousers shall be stacked flat.

* 5.2.2 Level C. Five pairs of trousers, of one size only, preserved as specified shall be packed in a fiberboard shipping container, assembled and closed, conforming to style RSC-L, type CF, variety SW, class domestic, grade 275, size 3A of MIL-B-17757. The fiberboard for the box liner shall be as specified for size 3A, variety DW. Trousers shall be stacked flat.

* 5.2.3 Industrial. Trousers shall be packed in accordance with the applicable requirements of ASTM D 3951.

5.2.4 Palletization. When specified (see 6.2) item, packed as specified shall be palletized on a 4-way entry wing-type pallet in accordance with load type 1a of MIL-STD-147.

* 5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

* 5.4 Preservation and packing. (see 6.2) preservation and packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:26Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The trousers are intended for use by the pararescue personnel in conjunction with the pararescue protective suit, transportation of specialized rescue and medical equipment, and protection against ground impact hazards.

* 6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. Size required (see 1.2).
d. When first article inspection is required, (see 3.1) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.
e. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
f. When palletization is required (see 5.2.4).
g. When all packaging data is to be cited in MIL-STD-2073-1 and MIL-STD-2073-2.

*6.3 Samples. For access to shade samples and patterns, address the procuring activity issuing the invitation for bids.

*6.4 Equal item. Prior to the use of an "or equal" item, the supplier shall submit the item with the supporting data to the contracting officer for subsequent approval or disapproval by the responsible military agency.

6.5 Subject term (key word) listing.

Ground impact hazard protection suit
Parachutist protection suit
Protective
Suit
Rescue
Medical

*6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

Custodian:
Air Force - 99

Review Activity:
Air Force - 45
Air Force - 82

Preparing activity:
DLA-CT

Project No. 8415-0861

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

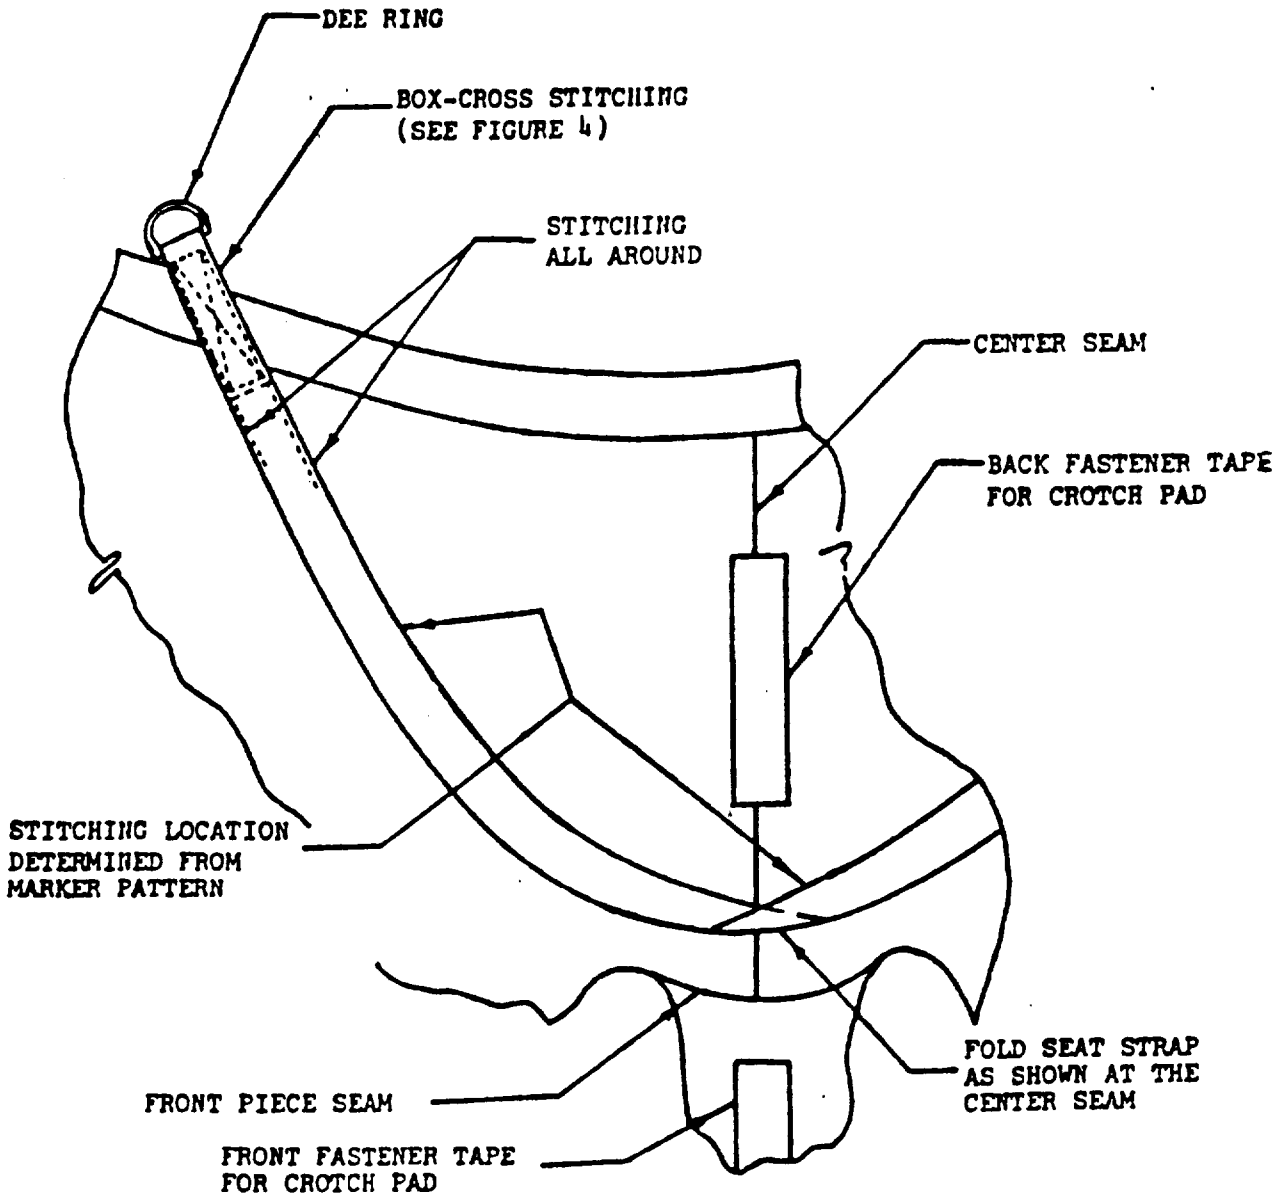


FIGURE 1. SEAT STRAP INSTALLATION

Source: https://assist.dla.mil -- Downloaded: 20261O-21T12:26Z
Check the source to verify that this is the current version before use.

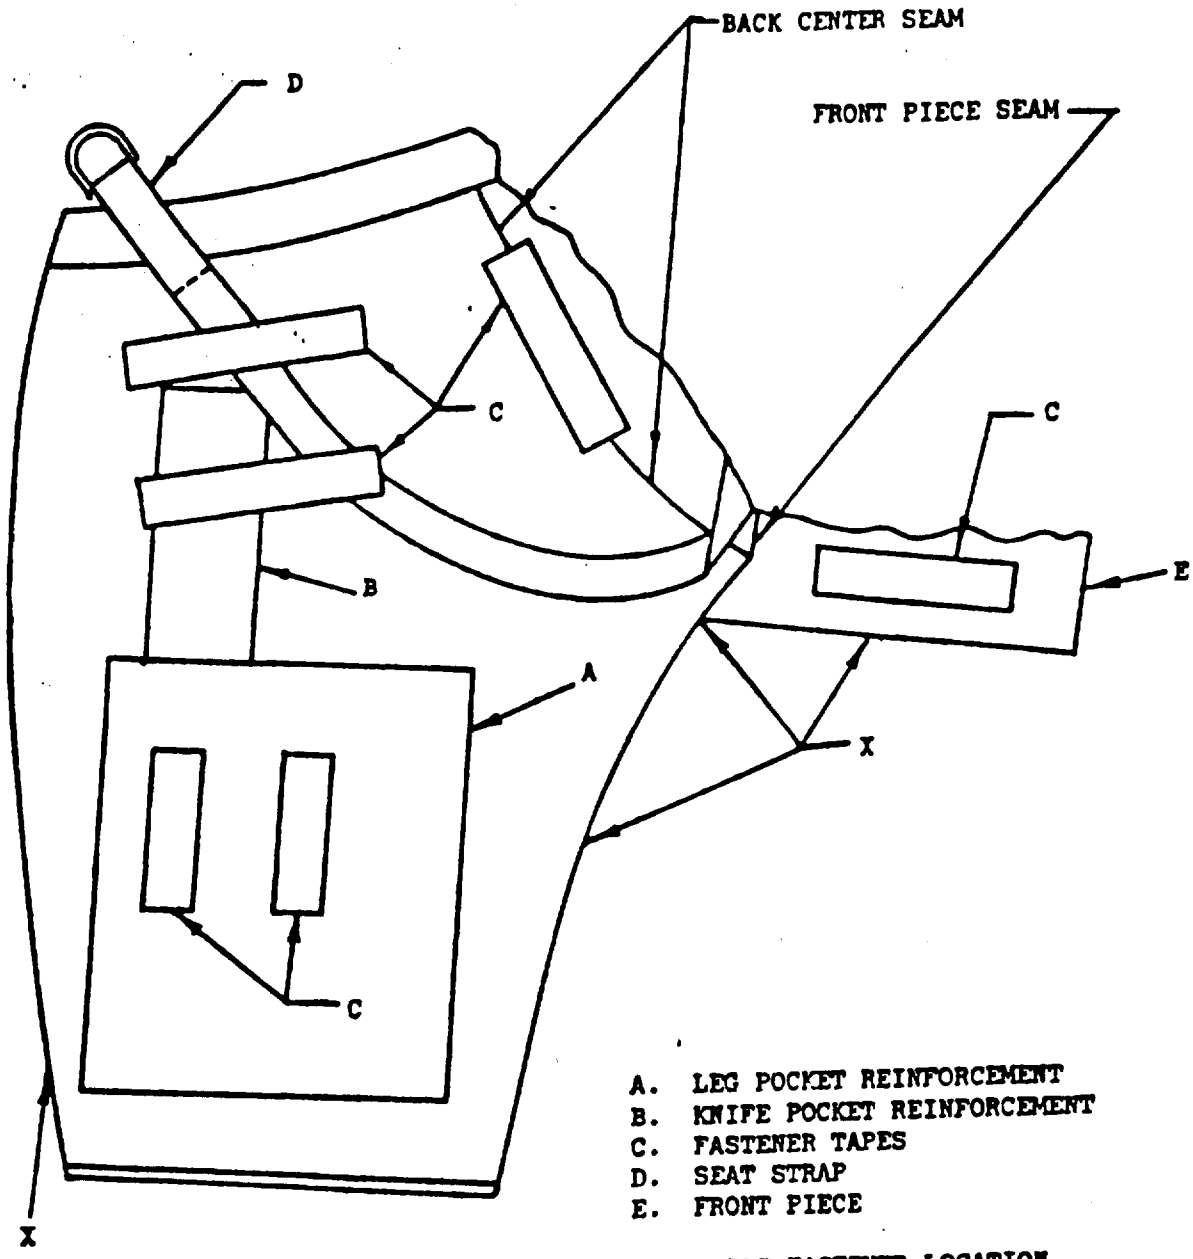


FIGURE 2. INSIDE VIEW-RIGHT LEG PANEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.


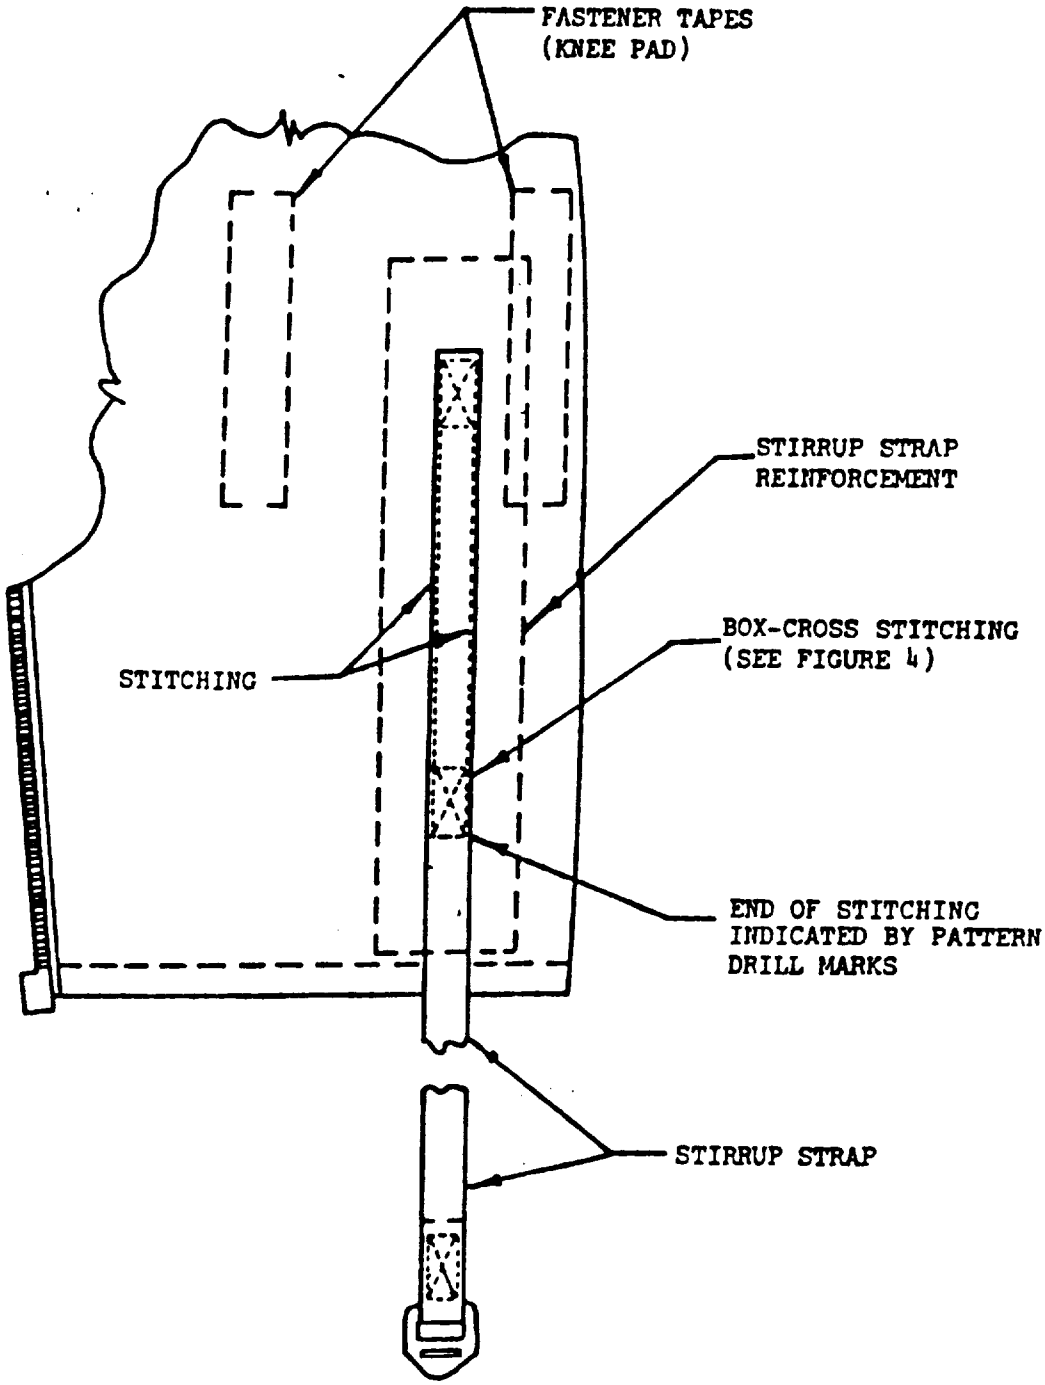


FIGURE 3. OUTSIDE VIEW-LEFT LEG PANEL STIRRUP STRAP STITCHING DETAILS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

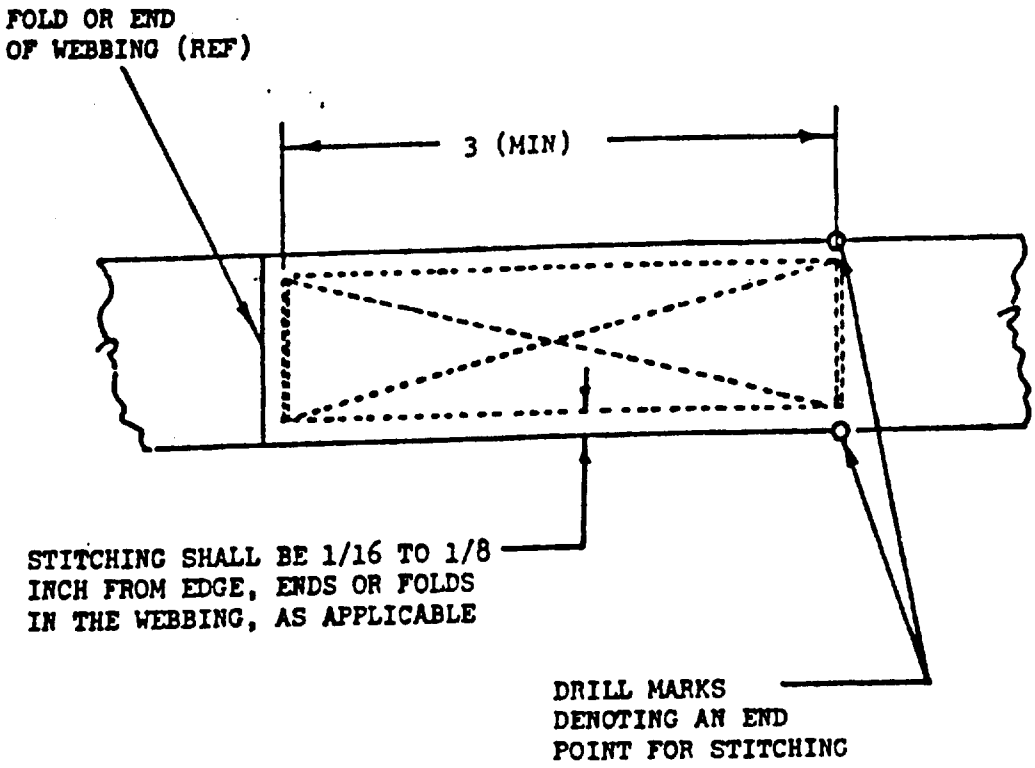

NOTE: WHEN ATTACHING HARDWARE TO A STRAP, THE LENGTH OF STITCHING SHALL EXTEND TO WITHIN 1/4 TO 3/8 INCH OF THE HARDWARE COMPONENT

FIGURE 4. BOX-CROSS STITCHING OF WEBBING STRAPS GENERAL GUIDANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

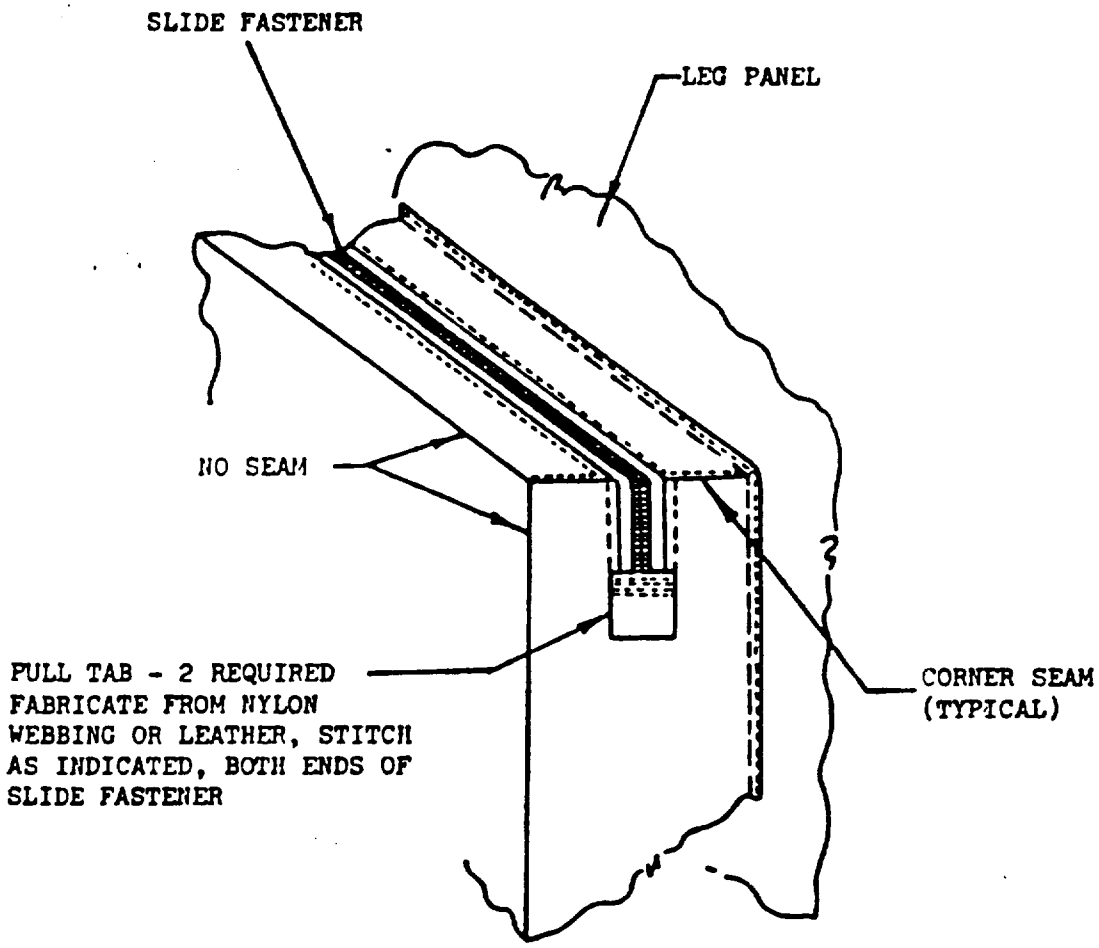


FIGURE 5. DETAILS OF ROPE POCKETS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

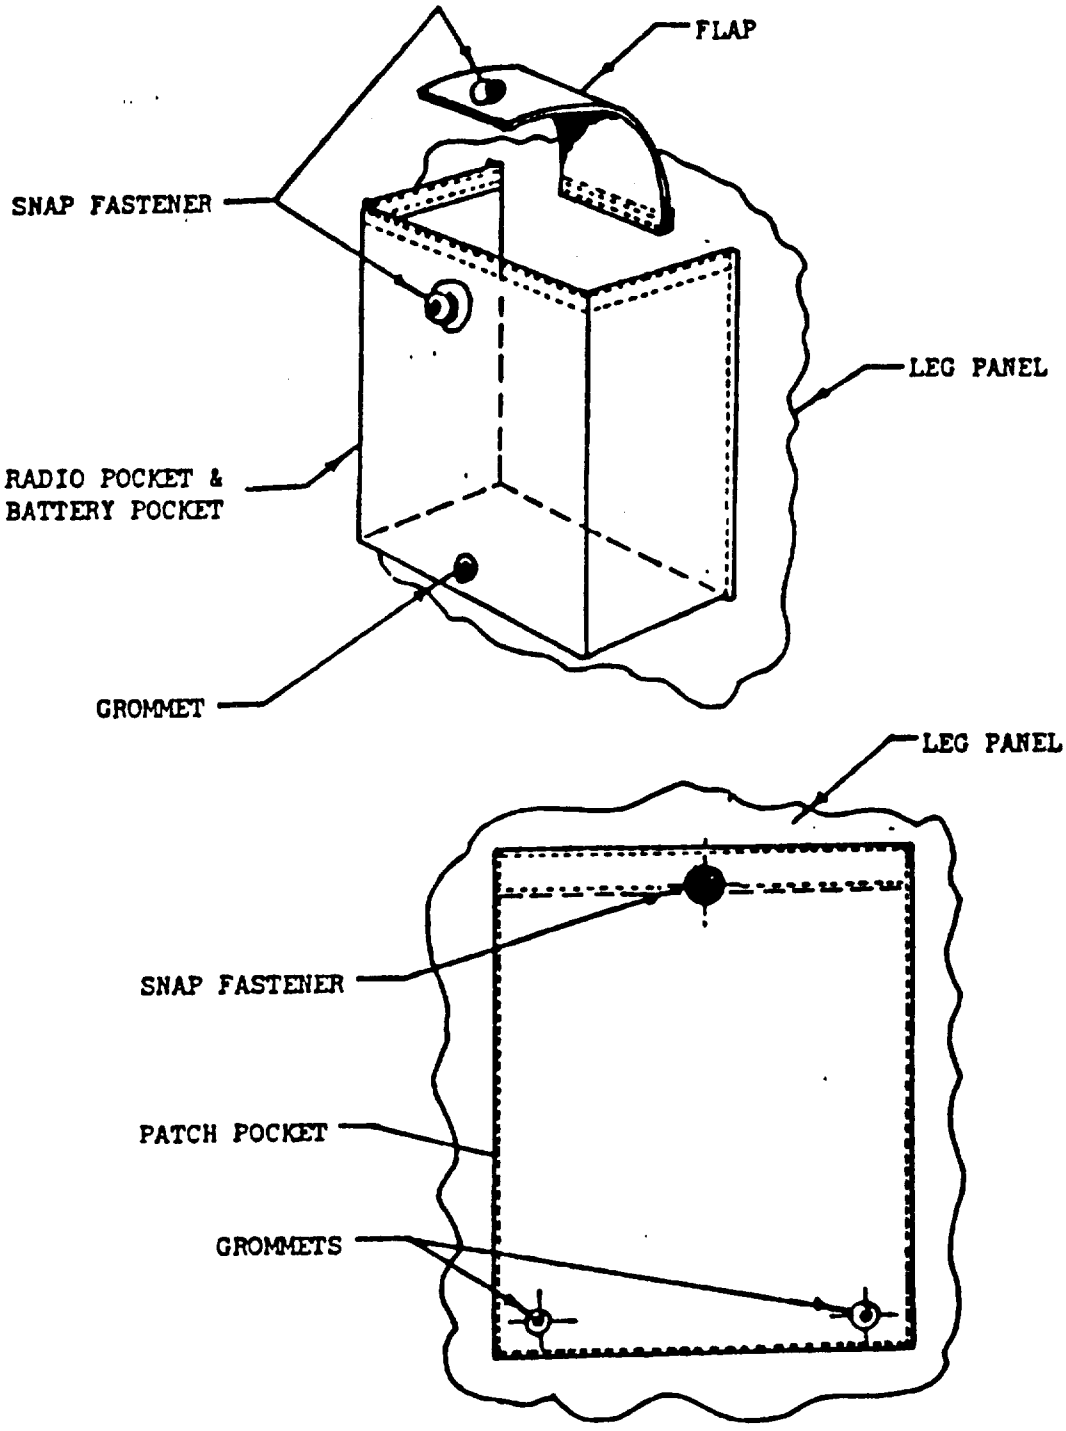


FIGURE 6. DETAILS OF ACCESSORY POCKETS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

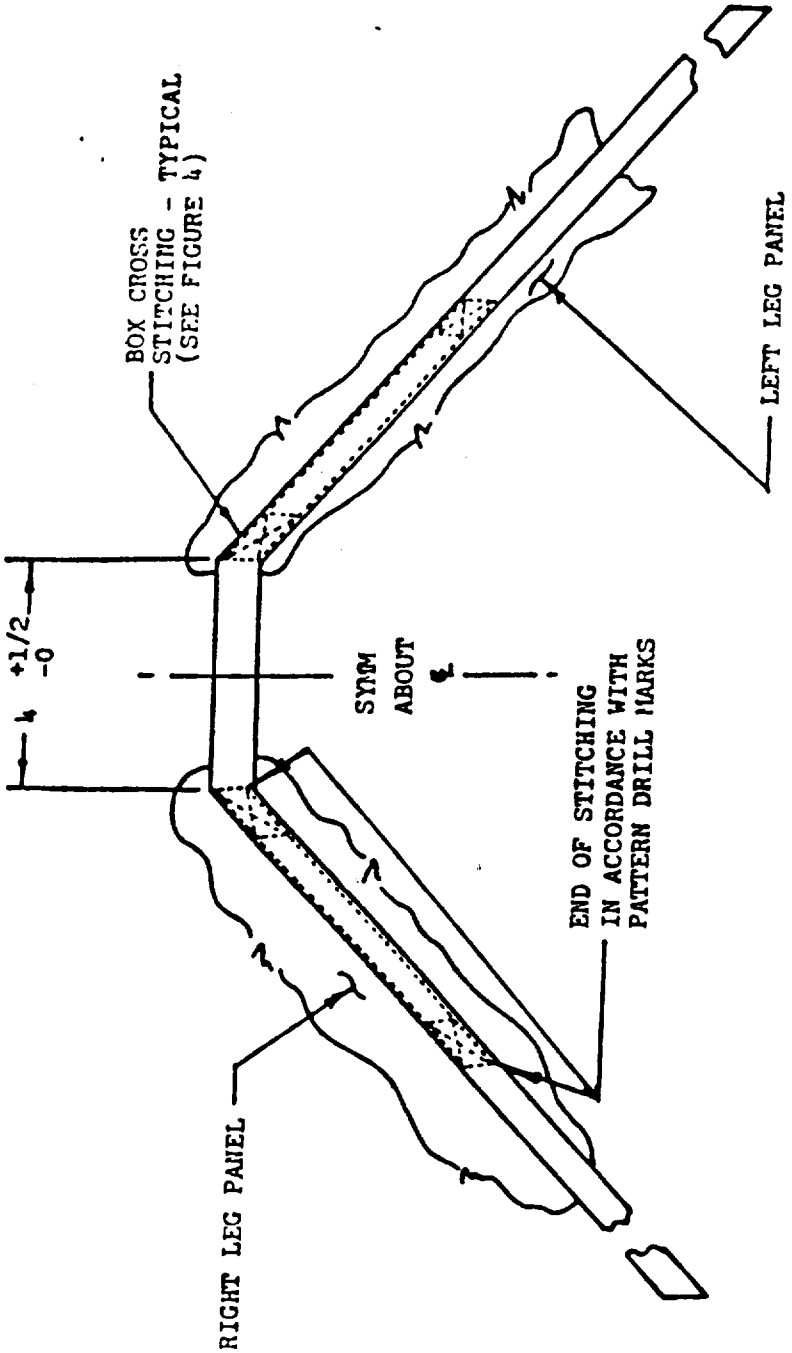


FIGURE 7. CROTCH STRAP INSTALLATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

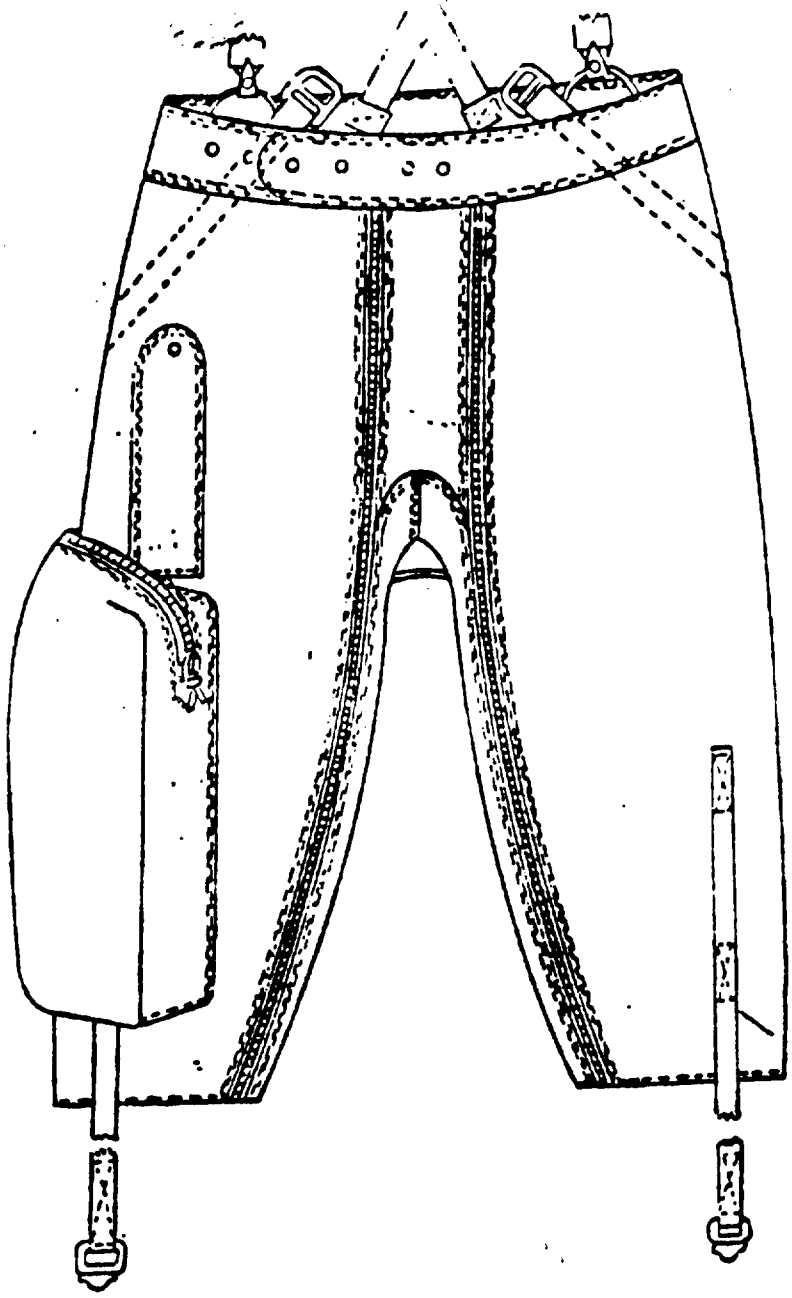


FIGURE 8

TROUSERS-PARARESCUE SUIT CWU-15/P

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8 In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-T-38350D	24 April 1992

3. DOCUMENT TITLE: TROUSERS, PARARESCUE CWU/15/P

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
DLA-CT	215-737-8105	444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street Philadelphia PA 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-290

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:26Z
Check the source to verify that this is the current version before use.