MIL-H-83269A(USAF)
23 April 1984
SUPERSEDING
MIL-H-83269 (USAF)
6 August 1970

MILITARY SPECIFICATION

HOOD, RAIN, WOMAN'S

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of rain hood with visor in one universal size.

2. APPLICABLE DOCUMENTS

2.1 Government documents

* 2.1.1 Specifications and standards. Unless otherwised specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	Thread, Cotton
PPP-B-636	Boxes, Shipping, Fiberboard

STANDARDS

FEDERAL

FED-STD-191	Textile Test Methods
FED-STD-751	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized Unit Loads

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ASD/ENES, Wright-Patterson AFB OH 45433 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

* 2.2 Other publications. The following document forms a part of this specification to the extent specified herein. The issues of the document which is indicated as DoD adopted shall be the issue in the current DoDISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951 Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia PA 19103.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Standard samples. Standard samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from the document may appear in the sample, in which case the document shall govern.

3.2 Materials

3.2.1 Laminated cloth. The finished cloth shall consist of the knitted nylon base cloth specified in 3.2.1.1, laminated on the rib side to the polyethylene film specified 3.2.1.2. The adhesion of the film to the knit cloth in the direction of the wales or courses shall be not less than 60 grams. The breaking strength in the direction of the wales and in the direction of the courses of the laminated cloth shall be not less than 19 pounds in each direction.

3.2.1.1 Base cloth. The base cloth shall be 15-denier nylon knit in a jersey stitch. The knitted cloth shall have a minimum of 30 wales and 32 courses per inch and shall be knit on a 2-bar tricot machine. The base cloth shall be white and shall weigh 0.6 to 0.7 ounce per square yard.

3.2.1.2 Polyethylene film. The film shall be transparent polyethylene and shall be not less than 0.001 inch thick.

* 3.2.2 Binding. The binding for the edges of the rain hood shall be straight cut, 1 inch wide, from the nylon base cloth specified in 3.2.1.1.

3.2.3 Thread. The thread for all seaming and stitching shall conform to type IC1, Ticket No. 0 or 00, 3 ply of V-T-276 and shall be white.

3.3 Design. The rain hood shall have two pleats on each side of the center back, with the outside fold of the pleats facing the center back, and a visor attached to the front of the rain hood.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

3.4 Patterns. Standard patterns that provide an allowance of 1/4 inch for all seams will be supplied by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the working patterns. The working patterns shall be identical to the standard patterns.

3.4.1 Pattern parts. The components of the rain hood shall be cut, in accordance with the following pattern parts, from the material specified in 3.2.1.

Pattern nomenclature	Cut parts
Visor	1
Hood body	1

3.5 Construction. The rain hood shall be constructed as specified in table I however, the manufacturer is not required to follow the exact sequence of operations as listed therein.

3.5.1 Stitches, seams, and stitchings. All stitches, seams, and stitchings used in the construction of the rain hood shall conform to FED-STD-751. The stitches per inch, specified in table I, shall be interpreted to be the minimum and the maximum permitted.

* 3.5.1.1 Thread breaks and ends of seams. Thread breaks shall be secured by stitching back of break not less than 1/2 inch.

* 3.6 Finished measurement. The finished measurement of the rain hood shall be 14-3/16, ±1/4 inches. To measure the rain hood, fold in half lengthwise and take the measurement at the center back to the top visor-joining seam.

3.7 Workmanship. The finished rain hood shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsiblity for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facility suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations.

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Top	Lower
* 1.	Cutting. Cut the material in strict accordance with the patterns which show directional lines and notches for proper assembly. The directional line shall be placed in the direction of, and parallel to, the wales. (The knit side of the laminated cloth shall be the outside of the rain hood as worn.)					
* 2.	Replacement of damaged parts. a. At the time of cutting, replace any part containing holes or weakening defects such as smashes, multiple floats, or loose knit. b. During the manufacturing process, replace any part damaged by needle chews, cuts, tears, holes, mends, or burns.					
* 3.	Make rain hood.					
	a. Bind the straight edge of the visor with a 1/4 +0, -1/16 inch seam.	301	BSc-1	6-8	00 or 0	00 or 0
	b. Place the unbound edge of the visor and the front edge of the rain hood together, notch to notch, with the polyethylene sides face to face and bind the edges together.	301	BSc-1	6-8	00 or 0	00 or 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Top	Lower
3.	Make rain hood. (Cont'd)					
	c. Bind the bottom edge of the rain hood with a 1/4 +0, -1/16 inch seam, forming two pleats according to the notches on each side of the center back of the hood, with the outside folds of the pleats facing the center back.	301	BSc-1	6-8	00 or 0	00 or 0
4.	Clean rain hood.					
	a. Trim all ends of thread and remove all loose threads from the rain hood.					
	b. Remove all spots and stains.					
	c. Fold the rain hood.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

* 4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified or qualified in this document or applicable purchase document.

* 4.2.1.1 Component testing. The methods of testing specified in FED-STD-191, wherever applicable, and as listed in table II shall be followed. The sample unit shall be 1 continuous yard full width of the finished cloth. The lot size shall be expressed in units of 1 linear yard and the sample size (number of sample units) shall be as specified below. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified.

Lot Size	Sample size (sample units)
800 or less	2
801 to 22,000 inclusive	3
22,001 or more	5

TABLE II. Component tests.

Component	Characteristic	Requirement paragraph	Test Method or procedure
Laminated cloth	Adhesion of film Breaking strength (wales and courses)	3.2.1	5950 5100
Base cloth	Material identification Yarn size Type of knit Texture (wales and courses) Color Weight	3.2.1.1	1/ 1/ Visual 2/ 5070 Visual 2/ 5041
Polyethylene film	Material identification Thickness	3.2.1.2	1/ 5030

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated characteristics.
2/ One determination shall be made per sample unit.

* 4.2.2 End item visual examination. The end item shall be examined for the defects listed in table III. The lot size shall be expressed in units of one rain hood. The sample unit shall be one rain hood. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 10.0 for total (major and minor combined) defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of visual defects.

Examine	Defects	Classification	
		Major	Minor
Material	Any hole, cut, tear, drop stitch, thin area, mend, smash, multiple float, or burn.	X	
	Any slub more than twice the thickness of normal yarn.		X
	Rowey yarn or tiger stripes or loose knitting causing sleasiness.		X
	Film delaminated from knit.	X	
Color	Not specified color or color not uniform.	X	
Cleanliness	Spot, stain, or streak of an obvious permanent nature.	X	
	Removable spot, stain, or streak clearly noticeable.		X
	Thread ends not trimmed or threads not removed.		X
Components	Any component missing or not as specified.	X	
	Knit side of laminated cloth of any part not on outside of rain hood as worn.	X	
Seams and stitchings	Any seam twisted, puckered, or stretched, affecting appearance.		X
	Needle chew.	X	
	Tight tension (stitches break when normal strain is applied to lengthwise direction of seam or stitching).		X
	Loose tension resulting in a loosely secured seam.		X
	Any part of rain hood badly pleated at seam line except bottom pleats in back or caught or twisted in any unrelated row of stitching.	X	
	Not specified seam type.	X	
	Not specified stitch type.	X	
	Number of stitches per inch more than maximum specified or less than minimum specified.		X
	Skipped, broken, or missing stitches for distance less than 1/2 inch.		X
	Skipped, missing, or broken stitches for distance more than 1/2 inch.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of visual defects. - Continued

Examine	Defects	Classification	
		Major	Minor
	Thread breaks not secured by stitching back of break 1/2 inch.		X
	Ends of threads not trimmed or loose threads not removed.		X
Pleats	Pleats not folded toward center back on the outside.	X	
	Folds of pleats at center back spread apart more than 1/8 inch at seam line or other two pleats unequally spaced from center back by 1/4 inch or more.		X
	Corresponding pleats uneven in depth by more than 1/8 inch.		X
Bindings	Raw edge exposed more than 1/4 inch but not more than 1/2 inch along inner edge of binding.		X
	Raw edge exposed more than 1/2 inch along inner edge of binding.	X	
	Binding not securely caught to edges up to 1/2 inch, causing binding to pull away from edge, or binding not securely caught up to 1/2 inch to seam attaching visor to hood.		X
	Binding not securely caught to edges more than 1/2 inch, causing binding to pull away from edge, or binding not securely caught more than 1/2 inch to seam attaching visor to hood.	X	
	Binding badly twisted.		X
	Ends of binding at points of rain hood not trimmed.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

4.2.3 End item dimensional examination. The rain hood shall be examined for conformance to dimensions specified in 3.6. Any dimensions deviating from the specified requirements shall be classified as defects. The lot size shall be expressed in units of rain hoods. The sample unit shall be one rain hood. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

* 4.2.4 Packaging inspection. An examination shall be made to determine that the preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged with the exception that it need not be closed. Examination for closure defects listed below shall be made on shipping containers fully packaged. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, or open and non-continuous heat sealed seams of polyethylene bag. Incorrectly fabricated bag. Bag not closed as specified. Omission of air vent hole in polyethylene bag. Bulged or distorted container.
Content	Number of bundles per container is more or less than required.

* 5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

* 5.1.1 Level A. Each rain hood shall be folded to an approximate size of 6 by 4 inches and then placed in a flat style-bag (see 5.3.1). The bag shall be made of clear polyethylene film that is 0.00125 inch thick (±25 percent tolerance). The bag shall be formed with heat-sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The bag shall be not less than 1 inch greater in length than the folded rain hood. The closure of the bag shall be heat sealed. Prior to or during the heat sealing of the closure, excess air within the bag shall be expelled.

* 5.1.2 Commercial. The rain hoods shall be preserved in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

* 5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

* 5.2.1 Level A. One-hundred and eight rain hoods, preserved as specified in 5.1, shall be packed flat, three in length, two in width, and six in depth, in a snug-fitting shipping container conforming to style RSC, grade V2s of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

* 5.2.2 Level B. One-hundred and eight rain hoods, preserved as specified in 5.1, shall be packed flat, three in length, two in width, and six in depth in a snug-fitting shipping container conforming to style RSC, type CF or SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

* 5.2.3 Commercial. Rain hoods, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Marking. In addition to any special marking required by the contract or purchase order, unit packages and shipping containers shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

* 5.3.1 Polyethylene bags. Each polyethylene bag (see 5.1.1) shall have the nomenclature, stock number, contract number, identification of the supplier, and the quantity of rain hoods contained therein legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so that it is readable through the polyethylene.

* 5.4 Palletization. When specified (see 6.2), rain hoods, packed as specified in 5.2, shall be palletized in accordance with MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES

6.1 Intended use. The rain hood covered by this specification is intended to be worn by female personnel of the Department of the Air Force.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification

b. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).

c. When palletization is required (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

6.3 Samples. For access to samples of the rain hood, address the procuring activity or as directed by the contracting officer.

6.4 Figure. Figure 1 shows the general design of the rain hood and is furnished for information only. Should any inconsistencies exist between the requirements of this specification and the figure, the requirements of this specification shall govern.

6.5 Changes from previous issue. The margins of this document are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 11

Review activities:
Air Force - 82, 99

User activity:
Air Force - 45

Preparing activity:
Air Force - 11

Project No. 8410-F586

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

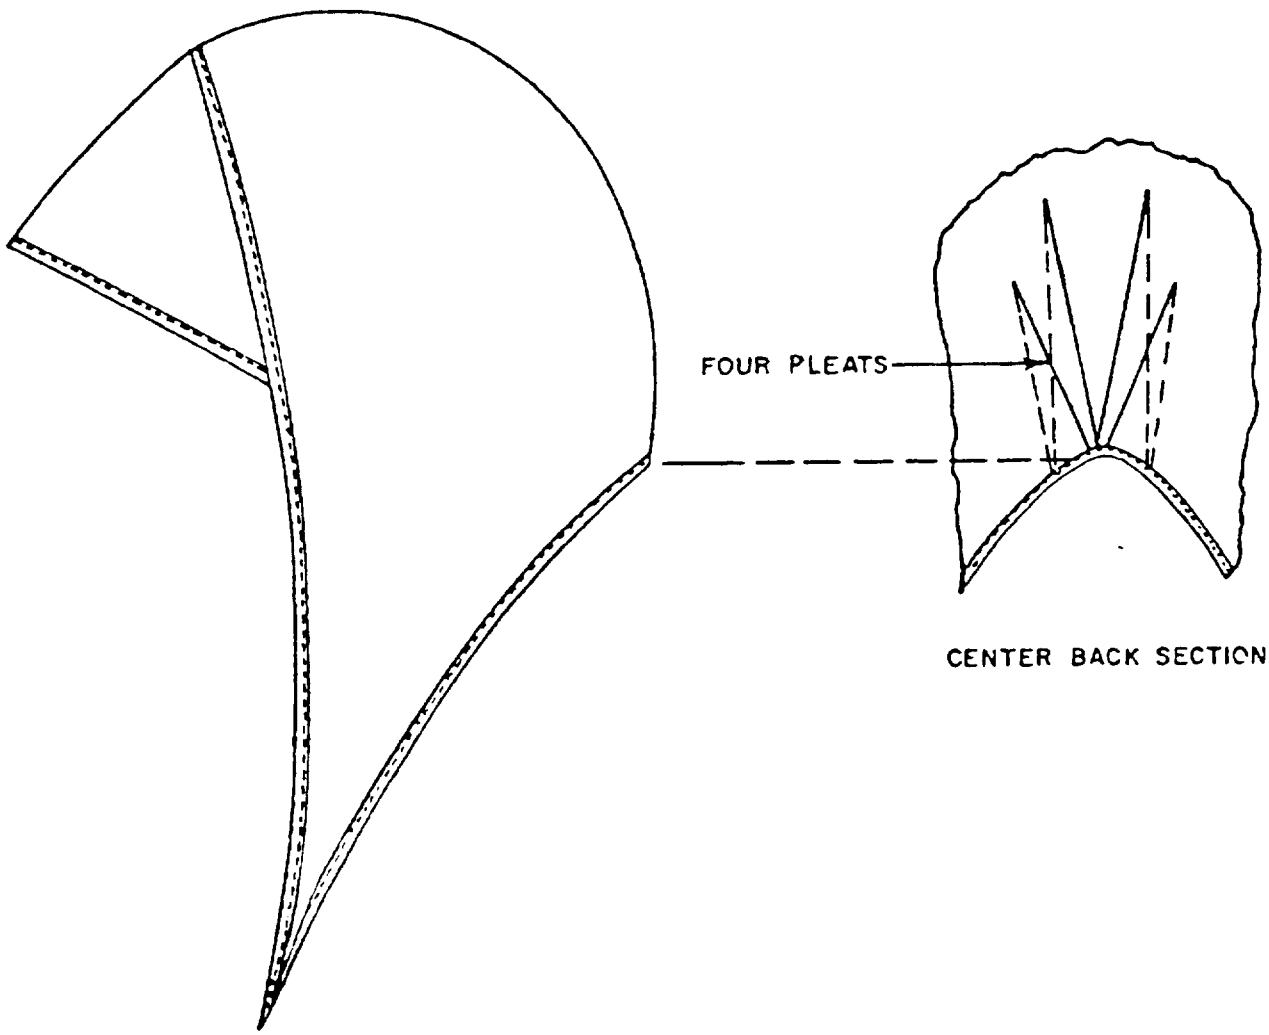


FIGURE 1. Rain hood, woman's

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE
ASD/ENES
Wright-Patterson AFB OH 45433

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

ASD/ENES
Wright-Patterson AFB OH 45433

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:44Z
Check the source to verify that this is the current version before use.