NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-27/277
3 May 1979

PERFORMANCE SPECIFICATION SHEET

TRANSFORMER, AUDIO FREQUENCY, SUB-MINIATURE, TFSR21ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of specification MIL-T-27.

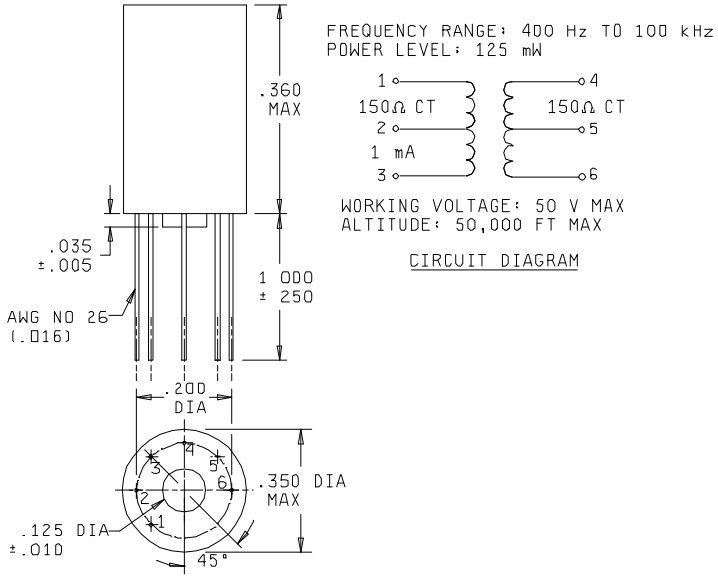

INCHES	MM
.350	8.89
.360	9.14
1.000	25.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. The number of terminals shall be as shown in circuit diagram.
4. Terminals are spaced the same as "TO"-76" transistors and micrologic elements.
5. For vibration and shock test the specimen shall be rigidly mounted on a printed circuit board.

FIGURE 1. Dimensions and configuration.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Electrical ratings
Primary power level 1 mW.
Working voltage (1-3) 50 Vrms, maximum.
Primary current 1 mAdc, 2.6 mA ac.
Primary impedance (1-3) 150 ohms ct.
Secondary load impedance: (4-6) 150 ohms ct.
Secondary current 2.6 mA ac.

Design and construction
Dimensions and configuration See figure 1.
Duty cycle Continuous.
Terminals Pin for printed circuit.
Material Type D per MIL-STD-1276.
Diameter 0.016 inch.
Length 1.000 ±0.250 inch.
Weight 2.4 grams.
Operating temperature range -55° to +105°C.
Altitude 50,000 feet.

Terminal strength Method 211 of MIL-STD-202, test condition A, 2 pounds.

Dielectric withstanding voltage.
At sea level 200 Vrms.
At reduced barometric pressure 100 Vrms.

Electrical characteristics:
Harmonic distortion. Total harmonic content of output 5 percent with .39 volts, 1 kHz and 1 mAdc applied to (1-3), secondary (4-5) + (6-7) loaded with .15 kilohms.
No load (ct voltage balance only) With 1 volt, 1 kHz applied to 1-3, unbalance (4-5) and (5-6) shall be 3 percent, maximum.
Self-resonant frequency 100 kHz, minimum.
Frequency response:
±3 dB at 300 Hz to 3 kHz at E_S = .78 V and load impedances of Z_S = 150 ohms and Z_L = 150 ohms, reference frequency shall be 1 kHz.

Polarity Additive, with terminals 3 and 4 connected.

Vibration, high frequency Method 204, MIL-STD-202, test condition B.

Part number M27/277-01.

Substitution data (information only) This military transformer is substitutable for FSCM 31669, part number 814. This in no way implies that the manufacturer's part is substitutable for the military item. This information is not intended to be complete.

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities
Army - ME
Navy - MC, AS
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0561-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-T-27/277 TRANSFORMER, AUDIO FREQUENCY, SUB-MINIATURE, TFSR21ZZ

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:01Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander, US Army ERADCOM
ATTN: DELET-RP
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:01Z
Check the source to verify that this is the current version before use.