INCH-POUND


MIL-PRF-27/277A
23 April 2003
SUPERSEDING
MIL-PRF-27/277
3 May 1979

PERFORMANCE SPECIFICATION SHEET

TRANSFORMER, AUDIO FREQUENCY, SUB-MINIATURE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of specification MIL-PRF-27.

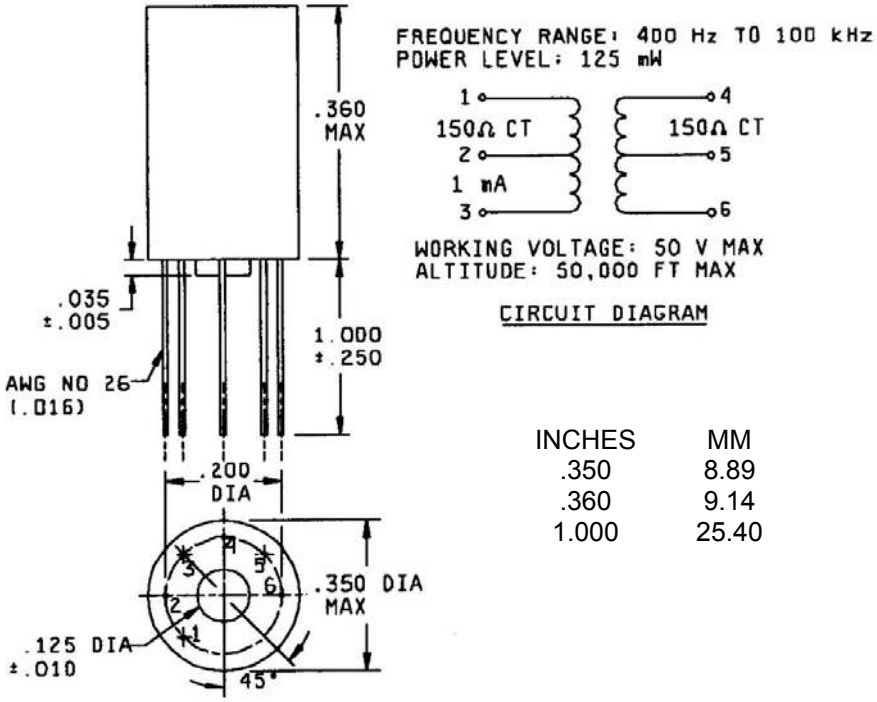

INCHES	MM
.350	8.89
.360	9.14
1.000	25.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The number of terminals shall be as shown in circuit diagram.
4. Terminals are spaced the same as “TO-76” transistors and micrologic elements.
5. For vibration and shock test the specimen shall be rigidly mounted on a printed circuit board.

FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Electrical ratings:
Primary power level: 1 mW.
Working voltage: (1-3) 50 Vrms, maximum.
Primary current: 1 mA dc, 2.6 mA ac.
Primary impedance: (1-3) 150 ohms ct.
Secondary load impedance: (4-6) 150 ohms ct.
Secondary current: 2.6 mA ac.

Design and construction:
Dimensions and configuration: See figure 1.
Duty cycle: Continuous.
Terminals: Pin for printed circuit.
Material: Type D per MIL-STD-1276.
Diameter: 0.016 inch.
Length: 1.000 ±0.250 inch.
Weight: 2.4 grams.
Operating temperature range: -55°C to +105°C.
Altitude: 50,000 feet.

Terminal strength: Method 211 of MIL-STD-202, test condition A, 2 pounds.

Dielectric withstanding voltage:
At sea level: 200 Vrms.
At reduce barometric pressure: 100 Vrms.

Electrical characteristics:
Harmonic distortion: Total harmonic content of output 5 percent with .39 volts, 1 kHz and 1 mA dc applied to (1-3), secondary (4-5) + (6-7) loaded with .15 kilohms.
No load (ct voltage balance only): With 1 volt, 1 kHz applied to 1-3, unbalance (4-5) and (5-6) shall be 3 percent, maximum.
Self-resonant frequency: 100 kHz, minimum.
Frequency response: ±3 dB at 300 Hz to 3 KHz at E_S = .78 V and load impedance of Z_S = 150 ohms and Z_L = 150 ohms, reference frequency shall be 1 kHz.

Polarity: Additive, with terminals 3 and 4 connected.

Vibration, high frequency: Method 204 of MIL-STD-202, test condition B.

Part or Identification Number (PIN): M27/277-01.

Custodians:
Army - CR
Navy - EC
Air Force - 11

Preparing activity:
DLA - CC

(Project 5950-1074)

Review activities:
Army - AR, CR4
Navy - AS, MC, OS, SH
Air Force - 19, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:00Z
Check the source to verify that this is the current version before use.