INCH-POUND

MIL-PRF-27/288C
W/AMENDMENT 2
20 May 2022
SUPERSEDING
MIL-PRF-27/288C
W/AMENDMENT 1
6 June 2017

PERFORMANCE SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS
(AUDIO, POWER AND HIGH-POWER PULSE)
INDUCTORS, POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-27.

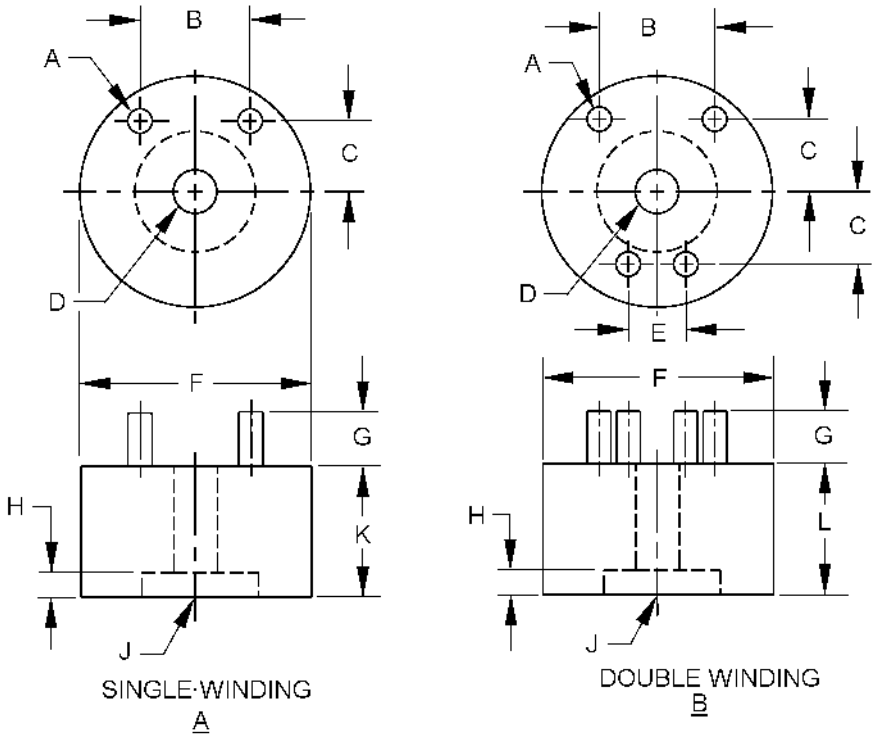



FIGURE 1. Dimensions and configurations.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:03Z
Check the source to verify that this is the current version before use.

Dim	Inches	mm
A	.073 ±.005	1.85 ±0.13
B	.600 ±.010	15.24 ±0.25
C	.300 ±.010	7.62 ±0.25
D	.156 ±.010	3.96 ±0.25
E	.400 ±.010	10.16 ±0.25
F	1.188 ±.030	30.18 ±0.76
G	.250 ±.030	6.35 ±0.76
H	.082 ±.015	2.08 ±0.38
J	.281 ±.015	7.14 ±0.38
K	.563 ±.063	14.30 ±1.60
L	.688 ±.063	17.48 ±1.60

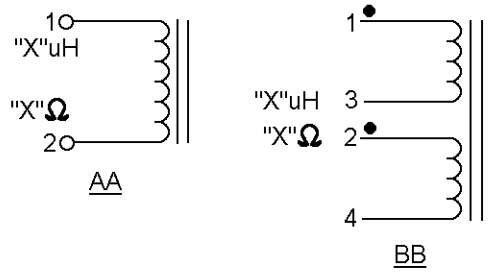

WV – 357V
(SEE TABLE I FOR VALUES OF “X”)
CIRCUIT DIAGRAM AND MARKING

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the side and on top.
4. Electrical values shall be marked as specified in table I, as applicable.
5. Circuit diagram BB, for series connection join terminals 2 and 3 for parallel connection join terminals 1 and 2, 3 and 4.

FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Electrical ratings: See table I.

TABLE I. Electrical ratings.

Dash no. 1/	Inductance (µh) +15 percent -5 percent 2/ 3/	DC current (A) max 2/ 4/	DC resistance (ohms) max 2/	Working voltage (peak) volts 5/	PIN arrangement (see figure 1)	Circuit Diagram (see figure 1)	Voltage
01	3000	1.2	1.2	357	A	AA	1 volt at 10 kHz
02	2000	1.5	.8	357	A	AA	1 volt at 10 kHz
03	1200	1.88	.5	357	A	AA	1 volt at 10 kHz
04	780	2.4	.3	357	A	AA	1 volt at 10 kHz
05	520	3	.2	357	A	AA	1 volt at 10 kHz
06	320	3.75	.13	357	A	AA	1 volt at 10 kHz
07	220 55	4.5 9	.08 .02	357	B	BB	1 volt at 10 kHz
08	120 30	6 12	.05 .013	357	B	BB	1 volt at 10 kHz
09	80 20	7.5 15	.032 .008	357	B	BB	1 volt at 10 kHz

1/ Qualification test and approval to M27/288-01, shall be sufficient to grant qualification approval to M27/288-02 through -09.
2/ Where electrical values are written one above the other they indicate the values from series or parallel connections respectively $\frac{(series)}{parallel}$.
3/ The inductance is measured with 0 A dc applied at the specified voltage and frequency.
4/ At rated dc current, inductance will exceed 80 of rated inductance.
5/ Between windings, 50 volts peak.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Epoxy.

Terminals: Printed circuit (tinned brass).

Weight: 1.5 ounces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:03Z
Check the source to verify that this is the current version before use.

Altitude: 75,000 feet.

Operating temperature range: -55°C to +130°C.

Terminal strength: MIL-STD-202-211, test condition A, 2 pounds.

Dielectric withstanding voltage:

At sea level: 1,000 Vrms.

At reduce barometric pressure: 500 Vrms.

Vibration (high frequency): MIL-STD-202-204.

Temperature rise: +45°C with 1 volt rms, 10 kHz, current as specified in table I at an ambient temperature of +85°C maximum.

Marking location: See figure 1.

Part or Identification Number (PIN): M27/288-(dash number from table I).

Referenced documents. In addition to MIL-PRF-27, this document references the following:

MIL-STD-202-204 MIL-STD-202-211

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Army - AR, MI
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
DLA - CC

(Project 5950-2022-049)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:03Z
Check the source to verify that this is the current version before use.