
MILITARY SPECIFICATION SHEET


TRANSFORMERS, POWER, 30 VA, 400 Hz, TF4S03YY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

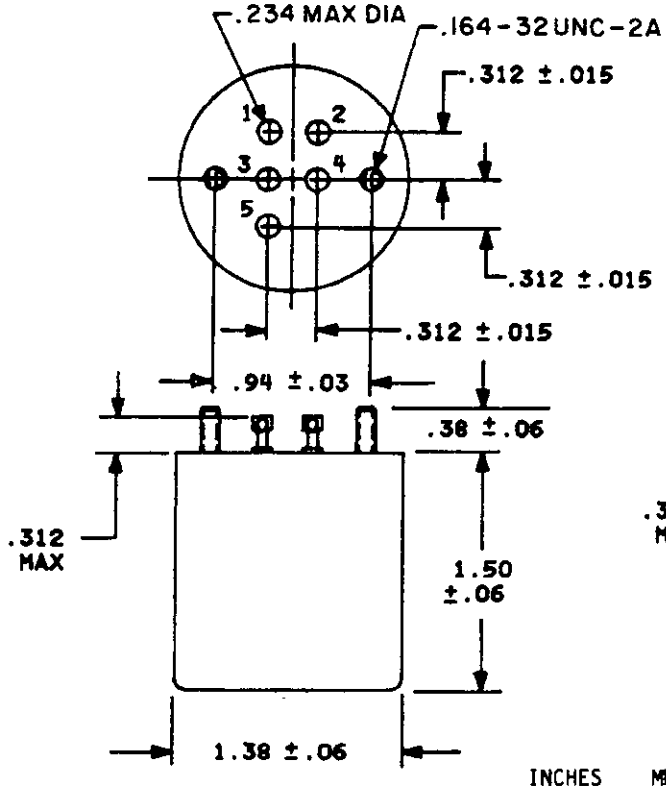


(1-2) 115 V 400 Hz




CONFIGURATION A

INCHES	MM
.015	.38
.03	.8
.06	1.5
.164	4.17
.234	5.94
.312	7.92
.38	9.7
.94	23.9
1.38	30.1
1.50	38.1

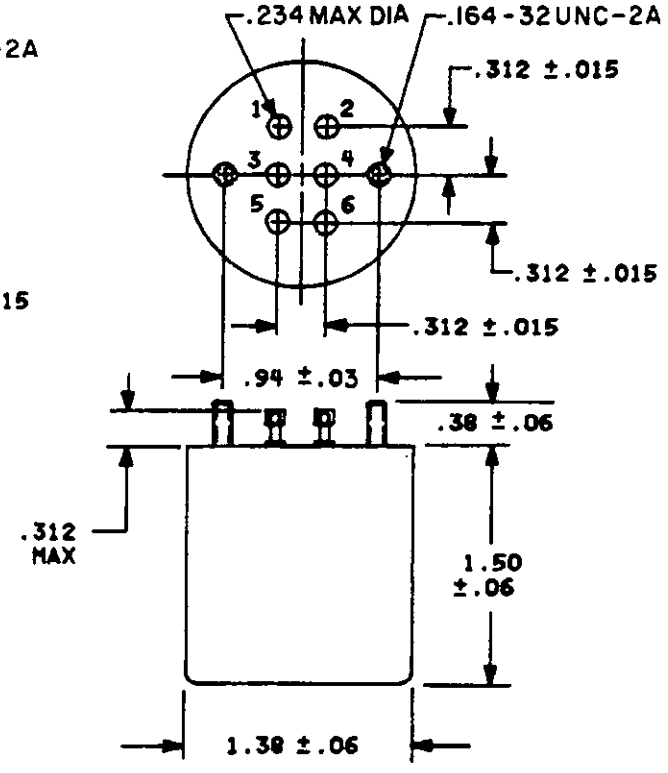

(1-2) 115 V 400 Hz



WORKING VOLTAGE 170 Vrms
ALTITUDE - 70,000 FT MAX
CIRCUIT DIAGRAM AND MARKING

CONFIGURATION B

(B)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Marking shall be on the sides of the case.

FIGURE 1. Dimensions and configuration.

(B) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:00Z
Check the source to verify that this is the current version before use.

FSC 5950

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Primary (1-2): 30 voltamperes, 115 volts rms, 400 hertz.

Secondary (3-5): See table I.

Working voltage:

(1-2): 170 volts rms.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Metal enclosed.

Material: Steel

Terminals: Feed through, solder terminals.

Height: .312 inch, maximum.

Diameter: .234 inch, maximum.

Weight: 7 ounces, maximum.

Operating temperature range; -55° to +130°C.

Altitude: 70,000 feet.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage (each winding):

At sea level: 500 volts rms.

At reduced barometric pressure: 300 volts rms.

Electrical characteristics:

Rated load: With 115 volts rms and 400 Hz in (1-2), and rated current in secondary: Voltage across (3-5): As specified in table I.

Efficiency: 85 percent at rated load.

Temperature rise: 40°C with 115 volts rms, 400 hertz across (1-2) at an ambient temperature of 90°C, full load terminals (3-5).

Vibration (high frequency): MIL-STD-202, method 204, test condition D.

Regulation: $\frac{\text{Voltage (no load)} - \text{Voltage (rated load)}}{\text{Voltage (rated load)}} \times 100$

Shall not exceed 10 percent

Polarity: Additive with terminals 2 and 3 connected.

Marking location: See figure 1.

Ⓑ Part number: M27/275 -dash number and letter (A or B) from table 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:00Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE I. Electrical ratings.

Dash number 1/	Secondary voltage (3-5) (Vrms) ±3%	Secondary current (3-5) (amps rms)	Dash number	Secondary voltage (3-5) (Vrms) ±3%	Secondary current (3-5) (amp rms)
01 A or B	6	5.00	23 A or B	39	0.77
02	6.3	4.76	24	43	0.70
03	7	4.29	25	47	0.64
04	7.5	4.00	26	51	0.59
05	8	3.75	27	56	0.54
06	9	3.33	28	62	0.48
07	10	3.00	29	68	0.44
08	11	2.73	30	75	0.40
09	12	2.50	31	82	0.37
10	12.6	2.38	32	91	0.33
11	13	2.31	33	100	0.30
12	15	2.00	34	110	0.27
13	16	1.88	35	115	0.26
14	18	1.67			
15	20	1.50			
16	22	1.36			
17	24	1.25			
18	26	1.15			
19	28	1.07			
20	30	1.00			
21	33	0.91			
22	36	0.83			

1/ Configuration B includes the electrostatic shield. The electrostatic shield has a voltage ratio of 5 to 1 at 10 kilohertz.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Propject 5950-0581-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:00Z
Check the source to verify that this is the current version before use.