
MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEP-DOWN, TF5S03ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

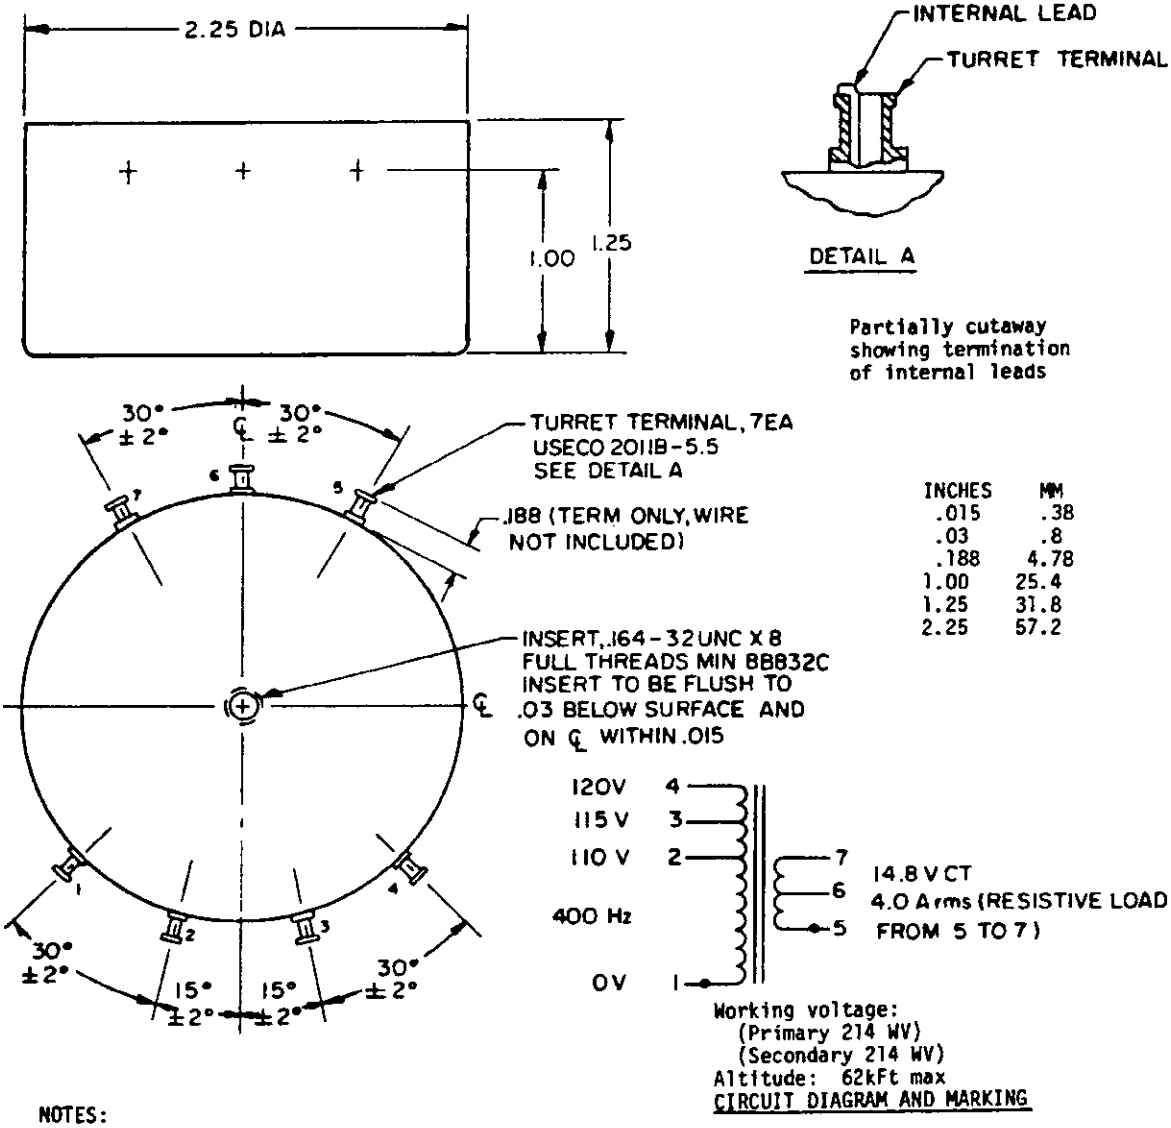

INCHES	MM
.015	.38
.03	.8
.188	4.78
1.00	25.4
1.25	31.8
2.25	57.2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Marking shall be on top of case.
4. Tolerances on all dimensions shall be ±.03 unless otherwise specified.

FIGURE 1. Dimensions and configuration.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:
Primary voltage: (1-2-3-4): 60 VA.
110/115/120 Vrms, 400 Hz.
Secondary voltage (5-6-7): 14.8 Vrms CT, 4.0 Arms.
Secondary current: 4.0 Arms.
Working voltage: 214 volts.

Design and construction:
Dimensions and configuration: See figure 1.
Duty cycle: Continuous.
Case: Diallylphthalate potting cup filled with Hysol C-18 epoxy.
Terminals: Turret terminal, hollow type, brass.
Height: .188 ±.010 inch.
Weight: 1 pound maximum.
Altitude: 62,000 feet maximum.
Operating temperature range: -55° to 130°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5.0 pounds.

Dielectric withstanding voltage:
At sea level: 600 volts rms.
At reduced barometric pressure: 300 volts rms.

Electrical characteristics:
No load: With 115 volts rms and 400 Hz in (1-3) voltage across (5-7): 15.4 volts ±3%, with 180 Vrms and 400 Hz in (1-3) current in (1-3): 200 mA pieak-to-peak maximum.
DC resistance: (1-4) 3.5Ω maximum.
(5-7) 0.065Ω maximum.
Polarity: Additive with terminals 4 and 5 connected.

Temperature rise: 42.5°C with 115 Vrms, 400 Hz across (1-3) at an ambient temperature of 87.5°C.

Shock (specified pulse): MIL-STD-810, method 516, procedure I, 15 G, half sine pulse.

Vibration (random): MIL-STD-202, method 214, test condition D, except the 6dB/octave roll-up shall intersect the 0.1 G^2/Hz point at 50 Hz. Vibration duration shall be 8 hours per axis.

Marking location: See figure 1.

Part number: M27/281-01.

Substitution data: This military transformer is substitutible for FSCM 72964, part number 19026. This in no way implies that the manufacturer's part is substitutable for the military item.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, WC, ME
Navy - MC, AS
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0561-19)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:01Z
Check the source to verify that this is the current version before use.