

MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER, AND HIGH-POWER PULSE) INDUCTOR, POWER, TF5V04ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the inductor described herein shall consist of this specification and the latest issue of MIL-T-27.

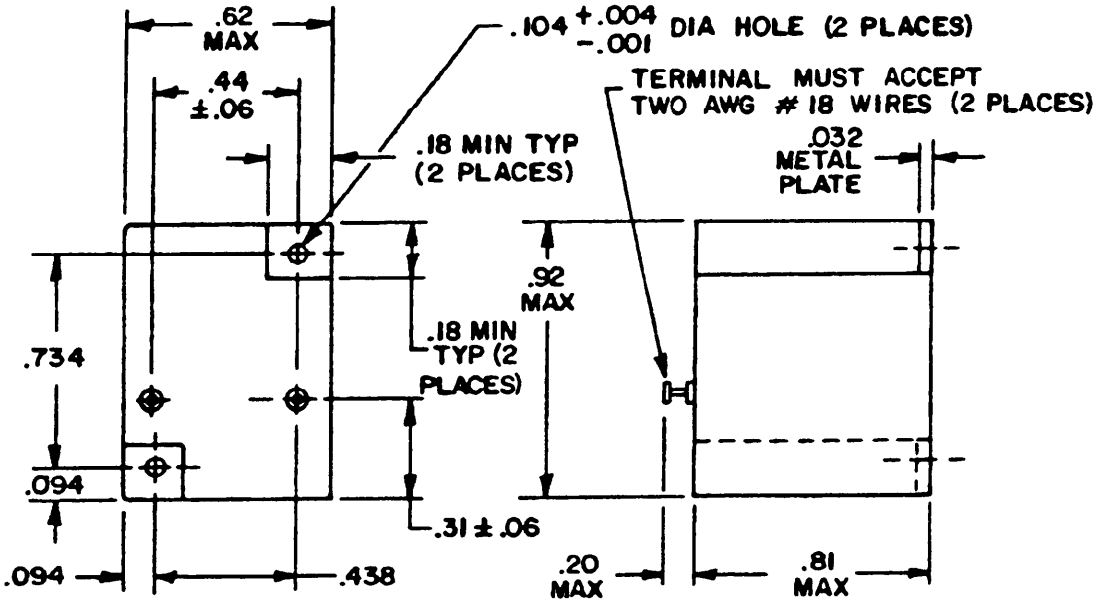

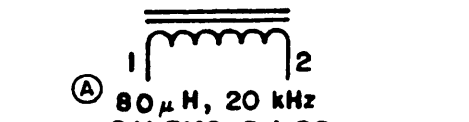

Ⓐ 80 μH, 20 kHz
8 V RMS, 5 A DC
.05 Ω
WORKING VOLTAGE: 175 V
ALTITUDE - 100,000 FT MAX

CIRCUIT DIAGRAM AND MARKING

INCHES	MM	INCHES	MM
.001	0.03	.20	5.08
.004	0.10	.31	7.87
.032	0.81	.438	11.13
.06	1.52	.44	11.2
.094	2.39	.62	15.8
.104	2.64	.734	18.64
.18	4.6	.81	20.6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the sides of the case.
4. Unless otherwise specified, tolerance is ±.010 (0.25 mm).

FIGURE 1. Dimensions and configuration.

Ⓐ denotes changes

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme material of the winding.)

Electrical ratings:

Inductance (1-2): 80 µH minimum.

Voltage (1-2): 8 V rms, 20 kHz.

Current (1-2): 5 A dc.

DC resistance: .05 ohm maximum.

Working voltage: 175 V maximum.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Material: Epoxy encased.

Terminals: Solder, turret type.

Height: .20 inch maximum.

Diameter: .11 inch maximum.

Weight: 20 grams maximum.

Altitude: 100,000 feet.

Operating temperature range: -55°C to +155°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds and test condition E, 8 ounce-inches.

Dielectric withstanding voltage:

At sea level: 500 V rms.

At reduced barometric pressure: 300 V rms.

Electrical characteristics:

Ⓐ Inductance: With 8 V rms, 20 kHz and 5 A dc applied to (1-2), the inductance shall be 80 µH minimum.

Temperature rise: 45°C maximum with 8 V rms, 20 kHz and 5 A dc applied to (1-2) at an ambient temperature of 110°C.

Vibration, high frequency: MIL-STD-202, method 204, test condition D.

Marking location: See figure 1.

Part number: M27/282-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:01Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy - SH, OS
Air Force - 11, 17, 99

User activities:
Army - ME
Navy - AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5950-0641-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:01Z
Check the source to verify that this is the current version before use.