
MILITARY SPECIFICATION SHEET


TRANSFORMER, AUDIO FREQUENCY, TF5S21ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

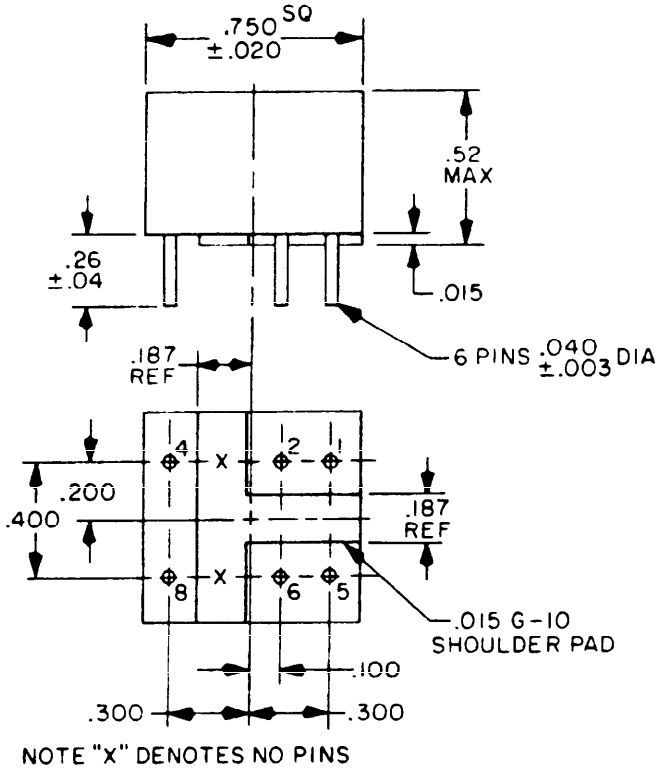

INCHES	MM
.003	.08
.015	.38
.020	.51
.040	1.02
.100	2.54
.187	4.75
.200	5.08
.26	6.6
.300	7.62
.400	10.16
.52	13.2
.750	19.05

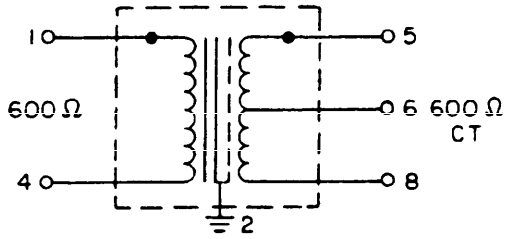

WORKING VOLTAGE 50 Vrms
ALTITUDE – 10,000 FT MAX
CIRCUIT DIAGRAM AND MARKING

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Marking shall be on the side of the case.

FIGURE 1. Dimensions and configurations.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:
Source impedance (1-4): 600 ohms.
Load impedance (5-8): 600 ohms.
Power level: 15 mW.
Working voltage: 50 volts peak

Design and construction:
Dimensions and configuration: See figure 1.
Duty cycle: Continuous.
Case: Epoxy cup.
Terminals: Pins, gold plated brass.
Terminal height: .26 inch, max.
Weight: 11.4 grams, max.
Operating temperature range: -55° to 130°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage (at sea level): 100 Vrms.

Electrical characteristics:
Primary impedance: 600 ohms ±10%.
Turns ratio (primary to secondary): 1 to 1.045.
Harmonic distortion: Total harmonic content of output 33 dB down with 3 volts, 1 kHz.
DC resistance and resistance unbalance:
(1-4) 50 ohms, maximum.
(5-8) 50 ohms, maximum.
Frequency response:
Z_S = 600 ohms (1-4).
Z_L = 600 ohms (5-8).
E_S = 3.14 volts.
Reference frequency: 1 kHz.
Frequency range: 300 to 4 kHz ±0.5 dB.
Insertion loss: 1 dB with 3.0 V, 1,000 Hz, maximum across (1-4).
Polarity: Additive with 1 and 5 added.
Electrostatic shielding: 2.5 to 1 minimum at 20 kHz.

Vibration (high frequency): MIL-STD-202, method 204, test condition E, except frequency range shall be 5 to 500 Hz, 3 axis, sweeptime 12 minutes, 3 Hz per axis.

Shock (specified pulse): MIL-STD-202, method 213, test condition C.
Measurement: Half-sine wave form 18 milliseconds duration.

Marking location: See figure 1.

Part number M27/283-01.

Substitution data (information only): This military transformer is substitutable for FSCM 72149, part number 2282A1. This in no way implies that the manufacturer's part is substitutable for the military item. This information is not intended to be complete.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, WC
Navy - MC, AS
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0561-21)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
TF5S21ZZ MIL-T-27/283 TRANSFORMER, AUDIO FREQUENCY,

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:02Z
Check the source to verify that this is the current version before use.