INCH-POUND

MIL-T-27/293A
20 April 1993
SUPERSEDING
MIL-T-27/293
7 July 1980

MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEP-DOWN, TF5R03ZZ

(A) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27


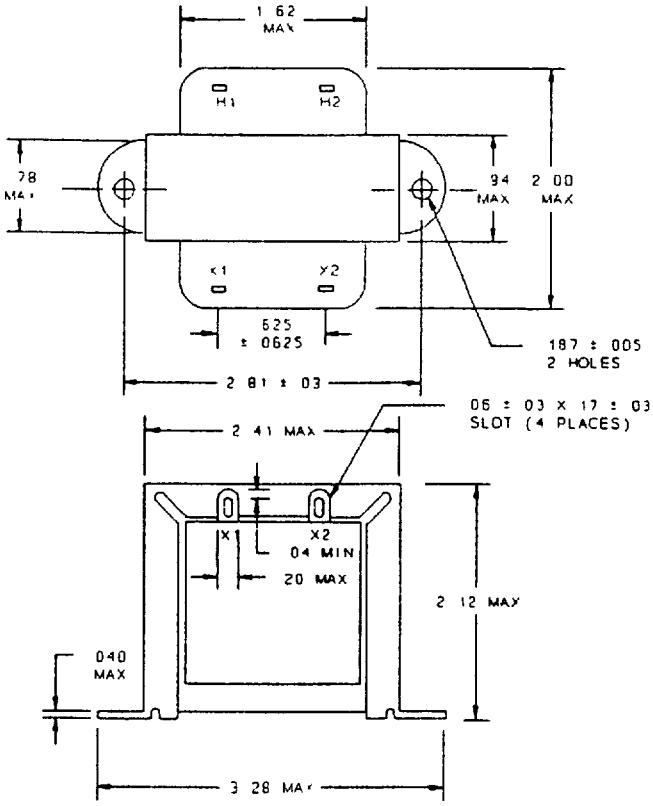


FIGURE 1 Dimensions and configurations

(A) denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:04Z
Check the source to verify that this is the current version before use.

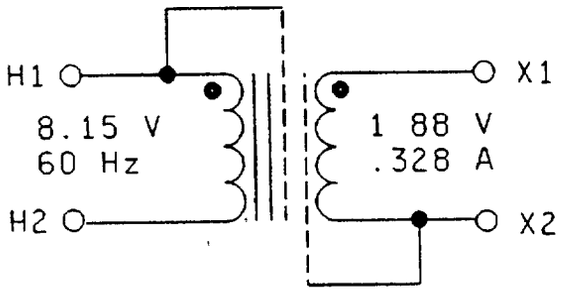

WV-857 V MAX
ALTITUDE-10,000 FT MAX

CIRCUIT DIAGRAM AND MARKING

Inches	mm
.030	0 76
.040	1 02
060	1 52
.0625	1 588
170	4 32
.200	5 08
.625	15 88
780	19 81
940	23 88
1.62	41 1
2 00	50 8
2 12	53 8
2 41	61 2
2.81	71 4
3 28	83 3

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for information only
3. Marking shall be on the top of the case

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i e , (H1-H2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings

Primary voltage (H1-H2) 8.15 V rms, 60 Hz

Primary current (H1-H2). 082 ampere rms

Volt-ampere 67 voltampere

Secondary voltage (X1-X2) 1 88 volts, 328 ampere rms

Working voltage 857 volts, maximum

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Encapsulated

Material Epoxy

Terminals Solder type

Material Brass, tinned or cadmium plated

Height 25 inch, minimum

Weight 16 7 ounces, maximum

Operating temperature range +5°C to +105°C

Terminal strength MIL-STD-202, method 211, test condition A, 2 pounds

Dielectric withstanding voltage (at sea level) 2,640 volts rms

Electrical characteristics

No load With 8 2 volts, 60 Hz across (H1-H2), current in (H1-H2) shall not exceed 320 milliampere and the power in (H1-H2) shall not exceed 2 5 watts

Voltage across (X1-X2) 2 05 volts ±1 percent

Rated load With 8.2 volts, 60 Hz across (H1-H2) and .328 ampere resistive load in (X1-X2), the voltage across (X1-X2) shall be 1 88 volts ±5 percent

DC resistance

(H1-H2) 3 42 ohms ±20 percent
(X1-X2) 0 31 ohm ±20 percent

Electrostatic shielding Static shields shall consist of 1 turn of 2 mil copper foil each

Polarity Additive, with terminals X1 and H2 connected

Temperature rise 40°C maximum with rated voltage and current at an ambient temperature of 65°C

Shock (high impact) MIL-STD-202, method 207

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:04Z
Check the source to verify that this is the current version before use.

(A) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Marking location See figure 1

Part or Identifying Number (PIN) M27/293-01

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities
Army - AR, WC
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0815-29)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:04Z
Check the source to verify that this is the current version before use.