INCH-POUND

MIL-T-27/298A
20 April 1993
SUPERSEDING
MIL-T-27/298
8 July 1980

MILITARY SPECIFICATION SHEET


TRANSFORMER AND INDUCTORS
(AUDIO, POWER AND HIGH-POWER PULSE)
INDUCTOR, POWER, TF5RD4ZZ

(A) Inactive for new design after the date of this specification.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-27

Inches	mm
.030	0.76
.04	1.0
.06	1.5
.17	4.3
.187	4.75
.25	6.4
.625	15.88
.75	19.0
.94	23.9
1.62	41.1
2.00	50.8
2.12	53.8
2.41	61.2
2.81	71.4
3.25	82.6

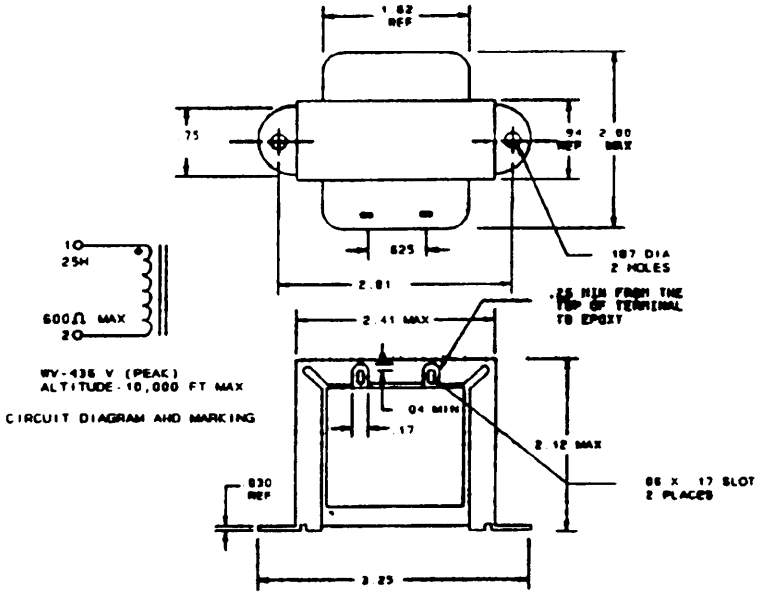

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Marking shall be on the side of the case.
4. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three-place decimals and ±.03 (0.8 mm) for two-place decimals.

FIGURE 1. Dimensions and configurations.

(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the windings.)

Electrical ratings:

Inductance: 25 H ±15 percent.

Voltage: 160 volts rms, 60 Hz.

Current: .040 ampere dc.

DC resistance: 600 ohms, maximum.

Working voltage (peak): 436 volts.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Material: Epoxy.

Terminals: Brass, solderable, tinned or silver plated.

Weight: 14.8 ounces ±15 percent.

Operating temperature range: +5°C to +105°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Shock (high impact): MIL-STD-202, method 207.

Dielectric withstanding voltage (at sea level): 1,220 volts rms

Electrical characteristics:

Inductance: With 160 volts rms, 60 Hz, and .040 ampere applied to (1-2), the inductance shall be 25 H ±15 percent.

Temperature rise: 40°C with 160 volts rms, 60 Hz, .040 ampere applied to (1-2) at an ambient temperature of 65°C maximum.

(A) Quality assurance provisions:

Qualification inspection: Not applicable for this specification sheet.

Quality conformance inspection: Groups A and B tests of MIL-T-27 shall be applicable.

Marking location: See figure 1.

Part or Identifying Number (PIN): M27/298-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:05Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0815-32)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:05Z
Check the source to verify that this is the current version before use.