NOT MEASUREMENT SENSITIVE

MIL-STD 2045-17508-3
29 July 1994

# MILITARY STANDARD

## Information Technology
## DOD Standardized Profiles AFT1(D)

## FILE TRANSFER, ACCESS, AND MANAGEMENT

### Part 3: AFT 11 - FTAM Simple File Transfer Service (unstructured)

AMSC N/A

AREA DCPS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

## Foreword

This military standard is approved for use by all Departments and Agencies of the Department of Defense (DOD).

Beneficial comments (recommendations, additions, deletions) and any pertinent data that may be of use in improving this MIL-STD should be addressed to the:

Joint Interoperability and Engineering Organization (JIEO)
ATTN: TBBF
Fort Monmouth, New Jersey 07703-5613

by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this MIL-STD or by memorandum.

This MIL-STD 2045-xxxx series DOD Standardized Profile (DSP) is a functional standard produced by the Data Communications Protocol Standards (DCPS) Technical Management Panel (DTMP). DTMP functional standards are functional groupings of base standards. Referenced base standards may be commercial, DOD or de facto standards, although International Standards (produced by ISO, CCITT, and other bodies) are preferred when possible.

This Defense Standardized Profile (DSP) is a functional DOD Data Communications Protocol Standard (DCPS) produced by the DCPS Technical Management Panel (DTMP). The MIL-STD-2045 document series was established within the DCPS Standardization Area to allow for the enhancement of commercial standards or the development of standards that are unique to DoD.

The MIL-STD-2045-10000 series, MIL-STD-2045-10000 to MIL-STD-2045-19999 inclusive, will be used to describe how DoD will implement commercial, international, national, federal, or military standards within the functional profile concept to provide required network services. The Government Open Systems Interconnection Profiles (GOSIP) will serve as the base for developing the 10000 series with DoD enhancements, unique military standards, and interim standards being used only when necessary.

The MIL-STD-2045-20000 series, MIL-STD-2045-20000 to MIL-STD-2045-29999 inclusive, will be used to describe DoD enhancements and extensions to existing commercial, international, national, or federal standards.

The MIL-STD-2045-30000 series, MIL-STD-2045-30000 to MIL-STD-2045-39999 inclusive, will be used to describe protocols and services unique to DoD that will not be supported by commercial, international, national, or federal standards.

The MIL-STD-2045-40000 series, MIL-STD-2045-40000 to MIL-STD-2045-49999 inclusive, will be used to document interim standards. Interim standards document protocols and services needed by DoD until these protocols and services are described in either a GOSIP or a MIL-STD-2045-20000 or -30000 series standard.

The MIL-STD-2045-50000 series, MIL-STD-2045-50000 to MIL-STD-2045-59999 inclusive, will be used to describe how DOD will implement commercial, international, national, federal, or military standards within the functional profile concept to provide required network services. The Government Open Systems Interconnection Profiles (GOSIP) will serve as the base for developing the 50000 series with DOD enhancements, unique military standards, and interim standards being used only when necessary. The difference between MIL-STD-2045-10000 series and the MIL-STD-2045-50000 series is that the 50000 series are interim profiles.

Specific details and instructions for establishing a MIL-STD-2045 document, as well as profile development guidelines, are documented in MIL-HDBK-829. DTMP Working Groups shall be responsible for DSP development and informal Service or Agency coordination; the DTMP Plenary shall be responsible for final review and approval.



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the currentversion before use.

This document was produced as an outgrowth of a requirement established for transmitting digital imagery and imagery related products using the National Imagery Transmission Format Standard (NITFS), and is intended to be a file transfer profile for end systems to communicate over DOD or commercial circuits.

This part of MIL-STD 2045-17508 contains two normative annexes and one informative annex.

| | |
|---|---|
| Annex A (normative) | DSPICS REQUIREMENTS LIST FOR ACSE, PRESENTATION AND SESSION |
| Annex B (normative) | AMENDMENTS AND CORRIGENDA |
| Annex C (informative) | CONCLUDING MATERIAL |

This document is a DSP for transmission of digital imagery using a file transfer protocol. It is in addition to the current Taxonomy and Framework for International Standardized Profiles.

The current technical content of the document has been derived from ISO 8571, parts 1 through 4. However, this document is based on DOD requirements. Differences between the content of this document and the base standards may exist.

For DOD acquisition purposes, where such differences exist, this DSP shall be the controlling document.

The Preparing Activity for this standard is the Data Communication Protocol Standards Technical Management Panel (DTMP). The custodians for the document are identified in the Defense Standardization Program, "Standardization Directory (SD-1)" and are classified in the Federal Supply Classification (FSC) system under Data Communication Protocol Standards (DCPS). Additional information can be obtained from:

Joint Interoperability and Engineering Organization
ATTN: DTMP Chairman
Ft. Monmouth, New Jersey 07703-5613



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the currentversion before use.

## Contents


| Paragraph | | Page |
|---|---|---|
| Introduction | | vi |
| 1 | Scope | 1 |
| 1.1 | General | 1 |
| 1.2 | Position Within the Taxonomy | 2 |
| 1.3 | Scenario Within the Taxonomy | 2 |
| 2 | References | 3 |
| 2.1 | Government Documents | 3 |
| 2.1.1 | Specifications, standards, and handbooks | 3 |
| 2.1.2 | Other Government documents, drawings, and publications | 4 |
| 2.2 | Non-Government publications | 4 |
| 2.2.1 | Profiles | 4 |
| 2.2.2 | Base Standards | 4 |
| 2.2.3 | Other Non-Government documents, drawings, and publications | 4 |
| 2.3 | Order of precedence | 5 |
| 3 | Definitions | 5 |
| 3.1 | General | 5 |
| 3.2 | Support level | 5 |
| 4 | Abbreviations and Acronyms | 6 |
| 5 | Conformance | 7 |
| 5.1 | ISO International Standardized Profiles | 7 |
| 5.2 | FTAM conformance | 7 |
| 6 | Virtual filestore | 7 |
| 6.1 | Filenames | 8 |
| 6.2 | Permitted actions file attribute | 8 |
| 6.3 | Format effectors | 8 |
| 6.4 | Document type FTAM-1 Unstructured Text | 8 |
| 6.5 | Document type NBS-9 File Directory File | 8 |
| 6.6 | Document type INTAP-1 Record File | 8 |
| 7 | File protocol | 8 |
| 7.1 | Length of FPDUs | 8 |
| 7.2 | File service class | 9 |
| 7.3 | Diagnostic parameter | 9 |
| 7.4 | Passwords | 9 |
| 7.5 | Initiator identity | 9 |
| 7.6 | Initiator identity, passwords and account | 9 |
| 7.7 | Presentation contexts | 9 |
| 7.8 | FTAM quality of service | 9 |
| 7.9 | Recovery-mode parameter | 9 |
| 7.10 | Recommendations | 9 |




Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

## Annexes


| | | |
|---|---|---|
| A | DSPICS Requirements List for DSP 2045-17508 (AFT11) | A-1 |
| B | Amendments and corrigenda. | B-1 |
| C | Concluding Material | C-1 |
| C.1 | Deviations from the Base Standards/Referenced Profiles | C-1 |
| C.2 | Subject Term (Keyword) Listing | C-3 |
| C.3 | Preparing Activity | C-3 |
| C.4 | Reviewing Activities | C-4 |
| C.5 | Custodians | C-4 |


## Figures


| | | |
|---|---|---|
| 1 | File transfer between two end systems | 2 |


## Tables


| | | |
|---|---|---|
| 1 | Interoperable configurations | 1 |
| 2 | Profile Stack | 3 |




Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

## Introduction

This DOD Standardized Profile (DSP) is defined within the context of functional standardization, in accordance with the principles specified by ISO/IEC TR 10000, "Framework and Taxonomy of International Standardized Profiles" and MIL-HDBK-829. The context of functional standardization is one part of the overall field of Information Technology (IT) standardization activities - covering base standards, profiles, and registration mechanisms. A profile defines a combination of base standards that collectively perform a specific well-defined IT function. Profiles standardize the use of options and other variations in the base standards to promote system interoperability and to provide a basis for the development of uniform, internationally recognized system tests.

One of the most important roles for a DSP is to serve as the basis for the development of recognized tests. DSPs also guide implementors in developing systems that fit the needs of the US Department of Defense (DoD). DSPs are produced not simply to 'legitimize' a particular choice of base standards and options, but to promote real system interoperability. The development and widespread acceptance of tests based on this and other DSPs is crucial to the successful realization of this goal.

The base standards of this DSP include Open Systems Interconnection (OSI) Layer Standards from the OSI Reference Model.

The specification in this part of MIL-STD 2045-17508 covers transfer of files between filestores of two end systems, using the OSI connection-mode Transport Service to provide the interconnection.



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

# Information Technology - DOD Standardized Profile (DSP) AFT1(D) - File Transfer, Access, and Management - Part 2: AFT11 - Simple File Transfer Service (unstructured)

## 1 Scope

### 1.1 General

This part of MIL-STD 2045-17508 (AFT11) covers transfer of files between the filestores of two end systems, using the OSI connection-mode Transport Service to provide the interconnection. One end system acts in the initiator role and requests access to the file, the other end system acts in the Responder role and provides access to the file in the Virtual Filestore.

These role combinations and the interoperability are shown in table 1.

**Table 1 - Interoperable configurations**

| | | Initiator | | Responder | |
|---|---|---|---|---|---|
| | | Sender | Receiver | Sender | Receiver |
| Initiator | Sender | | | | x |
| | Receiver | | | x | |
| Responder | Sender | | x | | |
| | Receiver | x | | | |

Transfer of files is supported for files with an unstructured constraint set and containing binary or character data.

This part of MIL-STD 2045-17508 specifies implementations that support file transfer, i.e. the ability to

a) either read a complete file, or

b) write (replace and/or extend) to a file, or

c) both;



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

and optionally to

a) create and delete a file, and

b) read the attributes of a file.

This part of MIL-STD 2045-17508 specifies how the FTAM Application standard shall be used to provide the functions defined above. It does not specify total system capability. In particular, a system may operate this Profile and at the same time engage in other communications. The requirements placed on an implementation in this part of MIL-STD 2045-17508 are solely those necessary for operation of the protocol specified.

This part of MIL-STD 2045-17508 describes the actions and attributes of the Virtual Filestore, and the service provided by the file service provider to file service users together with the necessary communications between the Initiator and the Responder.

## 1.2 Position within the taxonomy

This part of MIL-STD 2045-17508 is the third part of a multi-part DSP for AFT1n(D) File Transfer, Access and Management. The multi-part DSP consists of the following parts:

Part 1: Specification of ACSE, Presentation, and Session Protocols for use by FTAM

Part 2: Definition of documents types, constraint sets and syntaxes

Part 3: Simple File Transfer Service (unstructured)

Part 6: File Management Service

It may be combined with any T-Profiles (see ISO/IEC TR 10000) specifying the OSI connection-mode transport service.

## 1.3 Scenario

The model used is one of two end systems establishing an association and transferring files into and out of the Responder's Virtual Filestore as shown in figure 1.

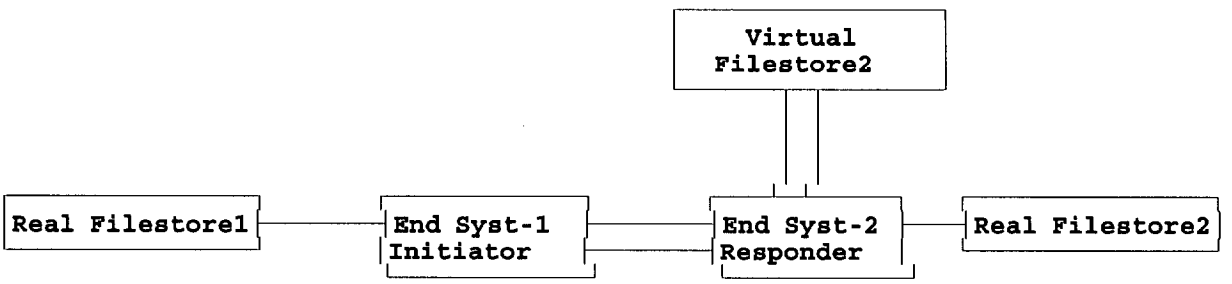



**Figure 1 - File transfer between two end systems**



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the currentversion before use.

Specifications of this part of MIL-STD 2045-17508 apply on the double lines of figure 1. The mapping between the Virtual Filestore and the Real Filestore together with the local data management system is not part of this part of MIL-STD 2045-17508.

This part of MIL-STD 2045-17508 defines the selection of specific Virtual Filestore options, file service options and file protocol options. The required functions from the supporting protocol stack of ACSE, Presentation, and Session are specified in MIL-STD 2045-17508-1 (see also table 2).

**Table 2 - Profile Stack**

| | |
|---|---|
| **Application Layer** | **ISO 8571**<br>**ISO 8650** |
| **Presentation Layer** | **ISO 8824, 8825**<br>**ISO 8823** |
| **Session Layer** | **ISO 8327** |

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of this part of MIL-STD 2045-17508. At the time of publication, the editions indicated were valid. All documents are subject to revision, and parties to agreements based on this part of MIL-STD 2045-17508 are warned against automatically applying any more recent editions of the documents listed below, since the nature of references made by DSPs to such documents is that they may be specific to a particular edition.

Amendments and corrigenda to the base standards referenced: See annex A for a complete list of these documents which are used in this part of MIL-STD 2045-17508.

## 2.1 Government Documents:

**2.1.1 Specifications, standards, and handbooks.** The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

MIL-HDBK 829: July 1994 *Guidelines for Developing Data Communications Profiles.*

DOD activities may obtain copies of DOD directives through their own publication channels or from the DOD Single Stock Point, Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094. Other federal agencies and the public may purchase copies from the U.S. Department of Commerce, National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161.

Copies of Federal Information Processing Standards (FIPS) are available to Department of Defense activities from the Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120-5099. Others must request copies of FIPS from the National Technical Information Services, 5285 Port Royal, Springfield, VA 22161-2171.



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

**2.1.2 Other Government documents, drawings, and publications.** The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

None.

**2.2 Non-Government publications.** The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation.

### 2.2.1 Profiles.

ISO/IEC ISP 10607-1: 1990, Information technology - International Standardized Profiles AFTnn - File Transfer, Access and Management - Part 1:Specification of ACSE, Presentation and Session Protocols for the use by FTAM.

ISO/IEC ISP 10607-2: 1990, Information technology - International Standardized Profiles AFTnn - File Transfer, Access and Management - Part 2:Definition of document types, constraint sets and syntaxes

DIS/IEC ISP 10607-6: 1990, Information technology - International Standardized Profiles AFTnn - File Transfer, Access and Management - Part 6:AFT3 - File Management Service.

Application for copies of these documents should be addressed to the American National Standards Institute, 11 West 42nd Street, NY, NY 10036 or to ISO, Van Demonstrate 94, 1013 CN Amsterdam, Netherlands.)

### 2.2.2 Base Standards

ISO 8571-1: 1988, Information processing systems - Open Systems Interconnection - File Transfer, Access and Management - Part 1:General introduction.

ISO 8571-2: 1988, Information processing systems - Open Systems Interconnection - File Transfer, Access and Management - Part 2: Virtual Filestore definition.

ISO 8571-3: 1988, Information processing systems - Open Systems Interconnection - File Transfer, Access and Management - Part 3:File Service Definition.

ISO 8571-4: 1988, Information processing systems - Open Systems Interconnection - File Transfer, Access and Management - Part 4:File Protocol Specification.

ISO 8571-5: 1990, Information processing systems - Open Systems Interconnection - File Transfer, Access and Management - Part 5:Protocol Implementation Conformance Statement (PICS) Proforma.

### 2.2.3 Other Non-Government documents, drawings, and publications.

The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation.

ISO 646: 1983, Information processing - ISO 7-bit coded character set for information interchange.

ISO 4873: 1986, Information processing - ISO 8-bit code information interchange - Structure and rules for implementation.



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the currentversion before use.

ISO 6429: 1988, Information processing - Control functions for 7-bit and 8-bit code character sets for character imaging devices.

ISO 6937-2: 1983, Information processing - Coded character sets for text communication - Part 2: Latin alphabetic and non-alphabetic graphic characters.

ISO 8327: 1987, Information processing systems - Open Systems Interconnection - Basic Connection Oriented Session Protocol Specification.

ISO 8327/Add.2---[1], Information processing systems - Open Systems Interconnection - Basic Connection Oriented Session Protocol Specification - ADDENDUM 2: Incorporation of unlimited user data.

ISO 8650: 1988, Information processing systems - Open Systems Interconnection - Protocol specification for the Association Control Service Element.

ISO 8823: 1988, Information processing systems - Open Systems Interconnection - Connection Oriented Presentation Protocol Specification.

ISO 8824: 1987, Information processing systems - Open Systems Interconnection - Specification of Abstract Syntax Notation One (ASN.1).

ISO 8825: 1987, Information processing systems - Open Systems Interconnection - Specification of Basic Encoding Rules for Abstract Syntax Notation One (ASN.1).

ISO 8859-1: 1987, Information processing - 8-bit single-byte coded graphic character sets - Part 1 - Latin alphabet No. 1.

(Application for copies of these documents should be addressed to the American National Standards Institute, 11 West 42nd Street, NY, NY 10036 or to ISO, Van Demonstrate 94, 1013 CN Amsterdam, Netherlands.)

[1]To be published

**2.3 Order of precedence.** In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

## 3 Definitions

For the purposes of this part of MIL-STD 2045-17508, the following definitions apply.
Terms used in this part of MIL-STD 2045-17508 are defined in the referenced base standards.
In addition. the following terms are defined.

### 3.1 General

**Interwork:** to be able to communicate to satisfy the intent of the Initiator.

### 3.2 Support level

To specify to support level of protocol features for this part of MIL-STD 2045-17508, the following terminology is defined.

**3.2.1 supported; m:** Any feature denoted by "m" is mandatory or optional in the base standard. That feature shall be supported, i.e. its syntax and procedures shall be implemented as specified in the base standard or in this part of



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the currentversion before use.

MIL-STD 2045-17508 by all implementations claiming conformance to this part DSP 2045-17508.

However, it is not a requirement that the future shall be used in all instances of communication, unless mandated by the base standard or stated otherwise in this part of MIL-STD 2045-17508.

For fully supported attributes, this implies that at least the minimum range of attribute values, as defined in ISO 8571-2, shall be supported unless stated otherwise in this part of MIL-STD 2045-17508.

NOTES

1 For features which are optional in the base standard, conformant implementations shall be able to interwork with other implementations not supporting this feature.

2 The support of a feature can be conditional, depending on the support of a class of features to which it belongs, e.g. a parameter in a PDU, a PDU in a functional unit.

**3.2.2 optionally supported; o:** Any feature denoted by "o" is left to the implementation as to whether that feature is implemented or not.

If an attribute group with a support level of "o" is chosen to be implemented, then all the attributes in this group that are classified as "m" shall be supported.

If a parameter is optionally supported, then the syntax shall be implemented, but it is left to each implementation whether the procedures are implemented or not.

When receiving an optional parameter which is not subject of negotiation and is not supported by the Receiver, the Receiver shall at least inform the Sender by information diagnostic and interworking shall not be disrupted.

**3.2.3 conditionally supported; c:** Any feature denoted by "c" shall be supported under the conditions specified in this part of MIL-STD 2045-17508. If these conditions are not met, the feature is outside the scope of this part of MIL-STD 2045-17508.

**3.2.4 excluded; x:** Any feature denoted by "x" is excluded in this part of MIL-STD 2045-17508, i.e. it shall not be implemented.

**3.2.5 outside the scope; i:** Any feature denoted by "i" is outside the scope of this part of MIL-STD 2045-17508, i.e. it may be ignored, and will therefore not be subject of an DSP conformance test. However, the syntax of all parameters of supported PDUs shall be implemented, even if the procedures are not (i.e. the Receiver shall be able to decode the PDU).

**3.2.6 not applicable; -:** Any feature denoted by "-" is not defined in the context where it is mentioned, e.g. a parameter which is not part of the respective PDU. The occurrence of n"not applicable" features is mainly due to the format of the tables in the DSPICS Requirements List.

## 4 Abbreviations and Acronyms

| | |
|---|---|
| ACSE | Association Control Service Element |
| AFT | Profile sub-class: File Transfer, Access and Management |
| CR | Carriage Return |
| DSP | Defense Standardized Profile |
| DSPICS | DSP Implementation Conformance Statement |
| FADU | File Access Data Unit |



Source: https://assist.dla.mil -- Downloaded: 2026t0-26T07:56Z
Check the source to verify that this is the currentversion before use.

| | |
|---|---|
| FPDU | File Protocol Data Unit |
| FTAM | File Transfer, Access and Management |
| IA5 | International Alphabet No. 5 |
| IRV | International Reference Version |
| ISP | International Standardized Profile |
| LF | Line Feed |
| OSI | Open Systems Interconnection |
| PCI | Protocol Control Information |
| PDU | Protocol Data Unit |
| PDV | Presentation Data Value |
| PICS | Protocol Implementation Conformance Statement |

Definitions and abbreviations used in MIL-STD 2045-17508-3, annex A are defined in ISO 8571.

Support level for protocol features:

| | |
|---|---|
| m | supported |
| o | optionally supported |
| c | conditionally supported |
| x | excluded |
| i | outside the scope |
| - | not applicable |

## 5 Conformance

This part of MIL-STD 2045-17508 states requirements upon implementations to achieve interworking. A claim of conformance to this part of MIL-STD 2045-17508 is a claim that all requirements in the relevant base standards are satisfied, and that all requirements in the following clauses and in annex A are satisfied. Annex A states the relationship between these requirements and those of the base standards.

### 5.1 Conformance statement

For each implementation claiming conformance to this part of MIL-STD 2045-17508 a PICSs shall be made available stating support or non-support of each option identified in this part of MIL-STD 2045-17508.

### 5.2 FTAM conformance

This part of MIL-STD 2045-17508 specifies implementation options or selections such that conformant implementation will satisfy the conformance requirements of ISO 8571.

This part of MIL-STD 2045-17508 includes some additional requirements above those required in ISO 8571-2 for a minimum range of values for the attributes that are supported (as indicated in annex A).

Implementation conforming to this part of MIL-STD 2045-17508 shall state whether they support the Initiator and/or the Responder role. They shall implement all the supported (m) features (identified in annex A) unless they are part of an unimplemented optional feature. They shall state which optionally supported (o) features are implemented (including a list of supported diagnostics). No additional requirements.

## 6 Virtual filestore

For interworking with implementations conforming to this part of MIL-STD 2045-17508, the Virtual Filestore is restricted



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the currentversion before use.

to files within the unstructured constraint set. The defined actions are restricted to actions on whole files.
The support for file and filestore characteristics, file actions, attribute groups and attributes is as specified in annex A.

## 6.1 Filenames

Apart from the minimum conformance requirements specified in ISO 8571-2, filenames have to be specified in the naming convention of the responding FTAM implementation. It is a local implementation matter of the FTAM Responder, whether or not additional name mapping onto the real filestore's filename convention is supported.

A Responder shall not require an Initiator to use multiple component GraphicString filenames. Requests using a single-component filename value with a sequence of on GraphicString shall be responded to using a single-component filename value. Use of multiple-component sequences of GraphicString is outside the scope of this DSP.

## 6.2 Permitted action file attribute

The values for the "permitted actions" attribute are not restricted by this part of MIL-STD 2045-17508 (see also ISO 8571-1 figure 5 and ISO 8571-2, 12.2).

## 6.3 Format effectors

When a single format effector for vertical (or horizontal) movement is optionally permitted to effect a combined vertical and horizontal movement, implementations shall not use this format effector for effecting the combined vertical and horizontal movement.

NOTES:
1 For further information see ISO 646 1983 4.1.2.2 and 6.4 ISO 6429:1988, E.1.2; and ISO 4873:1986, A.3.2.

2 This part of MIL-STD 2045-17508 requires only support of CO control characters of ISO 646 containing, among others, the format effectors <CR> and <LF> pairs as line terminators.

## 6.4 Document type FTAM-1 Unstructured Text

No additional requirements.

## 6.5 Document type NBS-9 File Directory File

No additional requirements.

## 6.6 Document type INTAP-1 Record File

The support of the transfer syntax INTAP-TS1 shall not be implemented.

# 7 File protocol

To support the internal file service identified in this part of MIL-STD 2045-17508, the basic file protocol and the basic bulk data transfer protocol are included. The error recovery file protocol machine, which may be null depending upon whether the recovery or restart functional units are in use, is used to provide the external
file service specified in this part of MIL-STD 2045-17508. Annex A summarizes the characteristics of the file protocol.

## 7.1 Length of FPDUs



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the currentversion before use.

No additional requirements.

## 7.2 File service class

No additional requirements.

## 7.3 Diagnostic parameter

No additional requirements.

For the "diagnostic" parameter of F-INITIALIZE, F-P-ABORT and F-RECOVER PDUs, the term "suggested delay" shall be supported.

## 7.4 Passwords

The parameters "filestore-password" for F-INITIALIZE PDU and "create-password" for F-CREATE PDU shall be supported for Initiators and optionally supported for Responders.

The "access passwords" parameters for F-SELECT, F-CREATE, and F-RECOVER PDUs shall be supported for Initiators and are optionally supported for Responders.

## 7.5 Initiator identity

No additional requirements.

## 7.6 Initiator identity, passwords and account

No additional requirements.

## 7.7 Presentation contexts

No additional requirements.

## 7.8 FTAM quality of service

No additional requirements.

## 7.9 Recovery-mode parameter

Responder implementations shall be able to negotiate the "recovery-mode" parameter value to a value other than "none" from the value received in an F-OPEN request.

## 7.10 Recommendations

No additional requirements.



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

# ANNEX A (normative)

## DSPICS Requirements List

## A.1 Introduction

This document provides the DoD Standardized Profile Implementation Conformance Statements (DSPICS) Requirements List (DPRL) for implementations of the MIL-STD 2045-17508. The DSPICS for an implementation is generated by completing the DPRL in accordance with the following instructions.

An implementation shall satisfy the mandatory conformance requirements of the base standards referenced in this profile.

An implementation's completed DPRL is called the DSPICS. The DSPICS states which capabilities and options of the protocol have been implemented. The following can use the DSPICS:

(a) the protocol implementor, as a checklist to reduce the risk of failure to conform to the standard through oversight.

(b) the supplier and acquirer or potential acquirer of the implementation, as a detailed indication of the capabilities of the implementation, stated relative to the common basis for understanding provided by the standard DSPICS proforma.

(c) the user or potential user of the implementation, as a basis for initially checking the possibility of inter-working with another implementation (note that, while inter-working can never be guaranteed, failure to internetwork can often be predicted from incompatible DSPICSs).

(d) a protocol tester, as the basis for selecting appropriate tests against which to assess the claim for conformance of the implementation.

### A.1.1 Notation

The following notations and symbols from ISP 10607 are used in the DPRL to indicate the basis for selection of options:

D - As defined in the base standard
P - As defined in MIL-STD 17508
I - Initiator
R - Responder
_ - underline indicates change from ISP 10607 selection



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

Example:

| Protocol Element/Parameter | D | P | Range of Values or Reference |
|---|---|---|---|
| **FTAM unstructured text abstract syntax** | o | o | |

The following notations and symbols from MIL-HDBK 829, which references ISO/IEC TR 10000-1 and -2, are used in the DPRL to indicate the status of features:

Status Symbols

| | |
|---|---|
| m | - mandatory |
| m.<n> | - support of every item of the group labeled by the same numeral <n> required, but only one is active at a time |
| o | - optional |
| o.<n> | - optional, but support of at least one of the group of options labeled by the same numeral <n> is required |
| c | - conditional |
| - | - non-applicable (i.e. logically impossible in the scope of the profile) |
| x | - excluded or prohibited |
| i | - out of scope of profile (left as an implementation choice) |
| f | - fully supported (see ISO 8571-2, clause 14) |
| p | - partially supported (see ISO 8571-2, clause 14) |

In addition, the symbol "•" is used to indicate an option whose status is not constrained by the profile (status in the base standard). The o.<n> notation is used to show a set of selectable options (i.e., one or more of the set must be implemented) with the same identifier <n>.

Two character combinations may be used for dynamic conformance requirements. In this case, the first character refers to the static (implementation) status, and the second refers to the dynamic (use); thus "mo" means "mandatory to be implemented, optional to be used."

Notations for Conditional Status

The following predicate notations are used:

<predicate>:: This notation introduces a group of items, all of which are conditional on <predicate>.

<predicate>: This notation introduces a single item which is conditional on <predicate>.

In each case, the predicate may identify a profile feature, or a boolean combination of predicates. ("^" is the symbol for logical negation.)

<index>: This predicate symbol means that the status following it applies only when the DSPICS states that the features identified by the index are supported. In the simplest case, <index> is the identifying tag of a single DSPICS items. The symbol <index> also may be a Boolean expression composed of several indices.

<index>:: When this group predicate is true, the associated clause should be completed.



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

Notations used in the Protocol Feature Column

<r> Symbol used to denote the receiving system.
<t> Symbol used to denote the transmitting system.

Support Column Symbols

The support of every item as claimed by the implementor is stated by circling the appropriate answer (Yes, No, or N/A) in the support column:

Yes Supported by the implementation.
No Not supported by the implementation.
N/A Not applicable.

Base standard requirements are shown using the equivalent notations in upper case (e.g., M, O, X).

### A.1.2 Footnotes

Footnotes to the proforma are indicated by superscript numerals. The footnote appears on the page of the first occurrence of the numeral. Subsequent occurrences of a numeral refer to the footnote of the first occurrence.

### A.1.3 Instructions for Completing the DPRL

A DSP implementor shows the extent of compliance to a DSP by completing the DPRL; that is, compliance to all mandatory requirements and the options that are not supported are shown. The resulting completed DPRL is called a DSPICS. Where this profile refines the features of the base standards, the requirements expressed in this DPRL shall be applied (as indicated in DPRL items with no "Profile Support" column) to constrain the allowable responses in the base standard DSPICS proforma. When this profile makes additional requirements, the "Profile Support" column for such DPRLs shall be completed. In this column, each response shall be selected either from the indicated set of responses, or it shall comprise one or more parameter values as requested. If a conditional requirement is inapplicable, use the Not Applicable (NA) choice. If a mandatory requirement is not satisfied, exception information must be supplied by entering a reference Xi, where i is a unique identifier, to an accompanying rationale for the noncompliance. When the profile requirement is expressed as a two-character combination (as defined in A.1.1 above), the response shall address each element of the requirement; e.g., for the requirement "mo," the possible compliant responses are "yy" or "yn."

### A.1.4 Standards Referenced

This AF profile covers transfer of files between filestores of two end systems, using the OSI connection-mode Transport Service to provide the interconnection. It uses the following standards:

ISO 8650 Protocol specification for the Association Control Service Element.
ISO 8327 Basic Connection Oriented Session Protocol Specification.
ISO 8823 Connection Oriented Presentation Protocol Specification.

## A.2 DSPICS Requirements List

The following tables give the DPRL for specification of transfers of files between two end systems. These tables refernce ISP 10607-3.



Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:56Z
Check the source to verify that this is the currentversion before use.

**Section 1:** No additional requirements

## Section 2: General ISO 8571 Detail

### A.3 ISO 8571 Protocol version

| | |
|---|---|
| FTAM protocol version numbers(s) | 1 |

### A.4 ISO 8571 Addenda

| | |
|---|---|
| ISO 8571-1 | - |
| ISO 8571-2 | - |
| ISO 8571-3 | - |
| ISO 8571-4 | - |
| ISO 8571-5 | - |

### A.5 Defect report numbers and amendments

| |
|---|
| see annex B |

### A.6 Global statement of conformance (A.6 PICS)

| | |
|---|---|
| Does MIL-STD 2045-17508 conform to ISO 8571? | yes |

### A.7 Initiator/Responder capability

No additional requirements.

### A.8 Application context name details

No additional requirements.



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:56Z
Check the source to verify that this is the current version before use.

# Section 3 : Syntax Detail

## A.9 Abstract syntaxes

| Object Descriptor | Object Identifier | D | I | R |
|---|---|---|---|---|
| FTAM PCI | {iso standard 8571 abstract-syntax(2) ftam-pci(1)} | m | m | m |
| FTAM FADU | {iso standard 8571 abstract-syntax(2) ftam-fadu(2)} | o | i | i |
| | {joint-iso-ccitt association-control(2) abstract-syntax(1) apdus(O) version 1(1)} | m | m | m |
| FTAM unstructured text abstract syntax | {iso standard 8571 abstract-syntax(2) unstructured-text(3)} | o | o | o |
| FTAM unstructured binary abstract syntax | {iso standard 8571 abstract-syntax(2) unstructured-binary(4)} | o | m | m |
| NBS file directory entry abstract syntax | {iso identified-organization oiw(14) ftamsig(5) abstract-syntax(2) nbs-as2(2)} | - | c | c |
| INTAP abstract syntax AS1 | {iso member-body 392 ftam(10) abstract-syntax(3) intap-as1(1)} | - | c | c |

NOTES

1 ISO 8571 requires the presence of the transfer syntax derived from the "Basic Encoding of a single ASN.1 type" {joint-iso-ccitt asn.1(1) basic-encoding(1)} encoding rules for transfer of the "FTAM PCI" and the "FTAM FADU" abstract syntax. Implementation detail of this transfer syntax, and other transfer syntaxes supported, is specified in the PICS of ISO 8823.

2 The support requirements for the conditional abstract syntaxes depend on the constraint sets and document types which are implemented (see clause A.14).



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

# Section 4 : Virtual Filestore Detail

## A.10 Virtual filestore

This clause details the conformance to the file model, file attribute support and to file structure support.

## A.10.1 File model

No additional requirements.

## A.10.2 Attributes

## A.10.2.1 Attribute groups

The level of support within each group is stated in A.10.2.2

| ATTRIBUTE GROUP NAME | D | I | R |
|---|---|---|---|
| Kernel | m | m | m |
| Storage | o | o | o |
| Security | o | m | m |
| Private | o | i | i |

## A.10.2.2 Attribute values

No additional requirements.

| SECURITY GROUP (INITIATOR) | D | I full | RANGE OF VALUES |
|---|---|---|---|
| Access control | f | m | see A.12.2 |
| Legal Qualifications | f | o | |

NOTE - An initiator shall not partially support attributes

## A.10.2.3 File detail

No additional requirements.

## A.10.3 File Structures

## A.10.3.1 Constraint sets

No additional requirements.

## A.10.3.2 File and filestore actions

## A.10.3.2.1 Filestore Actions

Support for filestore actions is dependent upon the functional units implemented (see A.13.4 and A.13.5)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

### A.10.3.2.2 File Actions

| CONSTRAINT SET<br>RESPONDER<br>unstructured<br>ACTION | D | R | |
|---|---|---|---|
| Locate | | | |
| Read | o | m | see note |
| Insert | | | |
| Replace | o | o | see note |
| Extend | o | o | see note |
| Erase | o | i | |

NOTE - The support of at least one of read, replace or extend is required.

### A.10.3.2.3 Access contexts supported

No additional requirements.

## A.10.4 Additional Information

No additional requirements.

## A.10.5 Override

No additional requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

# Section 5: File Protocol Detail

## A.11 File protocol: See clause 7

Subclauses A.11.2 to A.11.24 specify an indication of which PDUs are supported. The conformance requirements for PDUs are dependent on the particular functional units implemented. PDUs indicated in A.11.8 to A.11.24 as conditional shall be considered as mandatory when a particular functional unit is implemented, according to the following table.

No additional requirements.

## A.11.1 GraphicString support

No additional requirements.

## A.11.2 FTAM regime establishment

No additional requirements.

## A.11.3 FTAM regime termination (orderly)

No additional requirements.

## A.11.4 FTAM regime termination (abrupt) by service user

No additional requirements.

## A.11.5 FTAM regime termination (abrupt) by service provider

No additional requirements.

## A.11.6 File selection

No additional requirements.

## A.11.7 File deselection

No additional requirements.

## A.11.8 File creation

No additional requirements.

## A.11.9 File deletion

| | D | I | D | R | |
|---|---|---|---|---|---|
| F-DELETE PDU | c | o | c | o | see A.11, A.12.5 |
| FIELD NAME | | | | | RANGE OF VALUES OR REFERENCE |
| Action result | _____ | | m | m | all values defined in ISO 8571 |
| Shared ASE information | o | i | o | i | |
| Charging | _____ | | o | o | see A.12.10 |
| Diagnostic | _____ | | o | m | see A.12.6, 7.3 (in ISP 10607-3) |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

## A.11.10 Read attributes

| | D | I | D | R | |
|---|---|---|---|---|---|
| F-READ-ATTRIB PDU | c | o | c | o | see A.11, A.12.5 |
| FIELD NAME | | | | | RANGE OF VALUES OR REFERENCE |
| Action result | _____ | | m | m | all values defined in ISO 8571 |
| Attribute names | m | m | _____ | | |
| Attributes | _____ | | o | m | see A.10.2 |
| Diagnostic | _____ | | o | m | see A.12.6, 7.3 (in ISP 10607-3) |

## A.11.11 Change attributes

No additional requirements.

## A.11.12 File Open

No additional requirements.

## A.11.13 File close

No additional requirements.

## A.11.14 Beginning of grouping

No additional requirements.

## A.11.15 End of grouping

No additional requirements.



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the currentversion before use.

## A.11.16 Regime recovery

| | D | I | D | R | |
|---|---|---|---|---|---|
| F-RECOVER PDU | c | m | c | m | see A.11, A.12.5 |
| FIELD NAME | | | | | RANGE OF VALUES OR REFERENCE |
| State result | _____ | | m | m | all values defined in ISO 8571 |
| Action result | _____ | | m | m | all values defined in ISO 8571 |
| Activity identifier | m | m | _____ | | |
| Bulk transfer number | m | m | _____ | | |
| Requested access | m | m | _____ | | see A.12.16 |
| Access passwords | o | m | _____ | | see 7.4 and 7.6 (in ISP 10607-3) see notes |
| Contents type | _____ | | m | m | see A.12.7.2 |
| Recovery point | m | m | m | m | |
| Diagnostic | _____ | | o | m | see A.12.6, 7.3 (in ISP 10607-3) |
| Remove contexts | o | i | _____ | | see notes |
| Define contexts | o | i | _____ | | see notes |
| Presentation action | _____ | | m | m | see notes |

NOTES
1 Security is a military requirement. The form of security (access passwords, bulk encryption, etc.) has not been decided in many applications. Therefore, this item is specified as optional for the present.
2 The values available for the presentation action field depend upon the functional units implemented in ISO 8823.
3 The presentation action field is indicated as mandatory in accordance with ISO 8571-4. The field is defaulted to "no action".

## A.11.17 Locate file access date unit

No additional requirements.

## A.11.18 Erase file access data unit

No additional requirements.

## A.11.19 Read bulk data

| | D | I | |
|---|---|---|---|
| F-READ | c | m | see A.11, A.12.5 |
| FIELD NAME | | | RANGE OF VALUES OR REFERENCE |
| FADU identity | m | m | |
| Access context | m | m | see A.10.3.2.3 |
| FADU lock | o | i | |



Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

## A.11.20 Write bulk data

| | D | I | |
|---|---|---|---|
| F-WRITE PDU | c | m | see A.11, A.12.5 |
| FIELD NAME | | | RANGE OF VALUES OR REFERENCE |
| FADU operation | m | m | |
| FADU identity | m | m | |
| FADU Lock | o | i | |

## A.11.21 End of data transfer

| | D | I | R | |
|---|---|---|---|---|
| F-DATA-END PDU | c | m | m | see A.11, A.12.5 |
| FIELD NAME | | | | RANGE OF VALUES OR REFERENCE |
| Action result | m | m | m | all values defined in ISO 8571 |
| Diagnostic | o | m | m | see A.12.6, 7.3 (in ISP 10607-3) |

## A.11.22 End of transfer

No additional requirements.

## A.11.23 Cancel data transfer

No additional requirements.

## A.11.23.1 F-CANCEL mapping

No additional requirements.

## A.11.24 Restart data transfer

| | D | I | R | |
|---|---|---|---|---|
| F-RESTART PDU | c | m | m | see A.11, A.12.5 |
| FIELD NAME | | | | RANGE OF VALUES OR REFERENCE |
| Checkpoint identifier | m | m | m | |

## A.12 Expanded PDU field and filestore detail

This clause identifies further PDU field and filestore detail to expand on that given in clauses A.10 and A.11.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

### A.12.1 Implementation information detail

No additional requirements.

### A.12.2 Access control detail

No additional requirements.

### A.12.3 Access control element detail

### A.12.3.1 Action list detail (initiator)

No additional requirements.

### A.12.3.2 Action list detail (responder)

No additional requirements.

### A.12.3.3 Concurrency access term

No additional requirements.

### A.12.3.4 Identity term

No additional requirements.

### A.12.3.5 Initiator access passwords

No additional requirements.

### A.12.3.6 Responder access passwords

No additional requirements.

### A.12.3.7 Location term

No additional requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

### A.12.3.7.1 Application Entity Titles detail

No additional requirements.

### A.12.3.8 Access control element combinations

No additional requirements.

## A.12.4 Service class field detail

| | D | I | R | |
|---|---|---|---|---|
| **Transfer class** | o | m | m | see 7.2 (in ISP 10607-3) |
| **Access class** | o | i | i | |
| **Management class** | o | i | i | |
| **Transfer and management class** | o | m | o | see 7.2 (in ISP 10607-3) |
| **Unconstrained class** | o | i | i | |

NOTE - A conformant initiator is only permitted to specify those combinations defined in ISO 8571-3

## A.12.5 Functional unit field detail

| | SERVICE CLASSES | | | | | | |
|---|---|---|---|---|---|---|---|
| | Transfer | | | Transfer and Management | | | |
| **FUNCTIONAL UNITS** | D | I | R | D | I | R | |
| **Kernel** | m | m | m | m | m | m | |
| **Read** | c | m | m | c | m | m | see note 2 |
| **Write** | c | m | m | c | m | m | see note 2 |
| **File Access** | | | | | | | |
| **Limited File Management** | o | o | o | m | m | m | see 7.10.1 (in ISP 10607-3) |
| **Enhanced File Management** | o | i | i | o | i | i | |
| **Grouping** | m | m | m | m | m | m | |
| **FADU Locking** | | | | | | | |
| **Recovery** | o | m | m | o | m | m | see note 1 |
| **Restart data transfer** | o | m | m | o | m | m | see note 1 |

NOTES

1 The recovery and the restart data transfer functional units are only available at the internal file service interface and should only be explicitly referenced in the protocol.

2 The "c" indicates that either or both of the read and write functional units shall be implemented in the particular service class.



Source: https://assist.dla.mil -- Downloaded: 2026-04-26T07:56Z
Check the source to verify that this is the current version before use.

### A.12.6 Diagnostic field detail

No additional requirements.

### A.12.7 Contents type detail

### A.12.7.1 Contents type list parameter

No additional requirements.

### A.12.7.2 Contents type parameter

No additional requirements.

### A.12.8 FTAM Quality of service details

No additional requirements.

### A.12.9 Details of shared ASE information

No additional requirements.

### A.12.10 Details of charging

| Charging | D | R |
|---|---|---|
| Resource identifier term | m | o |
| Charging unit term | m | o |
| Charging value term | m | o |

### A.12.11 Filestore password detail

No additional requirements.

### A.12.12 Create password detail

No additional requirements.

### A.12.13 Concurrency control

### A.12.13.1 Supported values

No additional requirements.

### A.12.13.2 Responder default values

No additional requirements.

### A.12.14 FADU locking

No additional requirements.

### A.12.15 Initiator override

No additional requirements.



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

### A.12.16 Requested access

No additional requirements.

### A.12.17 Processing mode

No additional requirements.

### A.12.18 Recovery mode

No additional requirements.

## Section 6: Document Types

### A.13 Document types

Conformance to document types is given at two levels. The following table indicates which document types have some level of support. The detail of that level of support is stated in the following subclauses.

| Entry number | FTAM-1 | D | I | R |
|---|---|---|---|---|
| Object descriptor | ISO FTAM unstructured text | o | o | o |
| Object identifier | {iso standard 8571 document-type(5) unstructured-text(1)} | | | |

No additional requirements.

### A.13.1 FTAM-1

### A.13.1.1 Universal class number parameter

No additional requirements.

### A.13.1.2 String length parameter and string significance parameter combinations

No additional requirements.

### A.13.1.3 G sets supported

G sets which are supported in FTAM-1 GraphicString.

No additional requirements.

### A.13.1.4 G and C sets support

G and C sets which are supported in FTAM-1 GeneralString

No additional requirements.

### A.13.2 FTAM-2

No additional requirements.

### A.13.3 FTAM-3



Source: https://assist.dla.mil - Downloaded: 2026-04-26T07:56Z
Check the source to verify that this is the current version before use.

### A.13.3.1 String length parameter and string significance parameter combinations

No additional requirements.

## A.13.4 FTAM-4

No additional requirements.

## A.13.5 INTAP-1

### A.13.5.1 Maximum record length parameter

No additional requirements.

### A.13.5.2 Record significance parameter

No additional requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-04-26T07:56Z
Check the source to verify that this is the current version before use.

# ANNEX B (normative)

# AMENDMENTS AND CORRIGENDA

International Standards are subject to constant review and revision by the ISO/IEC Technical Committee concerned. The following amendments and corrigenda are approved by ISO/IEC JTC1, but at the date of publication of this part of MIL-STD 2045-17508 they were not yet incorporated in the text of the corresponding base standards as referenced in clause 2. The amendments and corrigenda as listed below are considered as normative references in this part of MIL-STD 2045-17508.

**ACSE**

ISO 8650/Cor.1:1990

**Session**

Solution to ISO 8327 Defects:

8326/002:ISO/IEC JTC1 SC21 N 4659

8325/005:ISO/IEC JTC1 SC21 N 4660

8326/025:ISO/IEC JTC1 SC21 N 4637

8326/026:ISO/IEC JTC1 SC21 N 4638

8327/037:ISO/IEC JTC1 SC21 N 4661

8327/043:ISO/IEC JTC1 SC21 N 4663

8327/045:ISO/IEC JTC1 SC21 N 4664

8327/047:ISO/IEC JTC1 SC21 N 4665

**FTAM**

ISO 8571-1/Cor.1:1990

ISO 8571-2/Cor.1:1990

ISO 8571-3/Cor.1:1990

ISO 8571-4/Cor.1:1990



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the currentversion before use.

# ANNEX C (informative)

# CONCLUDING MATERIAL

## C.1 Deviations from Base Standards/Referenced Profiles

Quality of Service (QoS), Security and other unique DoD requirements are addressed with the modifications to ISO/IEC 10607. Listed below are the changes that have been made along with the rationale behind each modification:

Part 3, Clause 6.6

| Protocol Element/Parameter | Base(D) | ISP(P) | DSP(P) |
|---|---|---|---|
| Support of transfer syntax INTAP-TS1 | o | o | x |

Rationale: The characteristics of the NITF digital image transferred is generally a large data file with binary-typed content. This parameter excluded for this reason.

Part 3, Clause 7.3

Protocol Element/Parameter

Diagnostic parameter"For the "diagnostic" parameter of F-INITIALIZE, F-P-ABORT and F-RECOVER PDUs, the term "suggested delay" shall be supported if the Recovery functional unit is implemented.

Rationale: Required to support the implementation of the Restart and Recovery functional units.

Part 3, Clause 7.4

Protocol Element/Parameter

Passwords"If the security attribute group is supported, the "access passwords" parameter for F-SELECT, F-CREATE, and F-RECOVER PDUs shall be supported for initiators and are optionally supported for Responders.

Rationale: Required to support the implementation of the security attribute group.

Part 3, Clause 7.9

Protocol Element/Parameter

Recovery-mode parameter"Responder implementations supporting the Restart-data-transfer or the Recovery functional unit shall be able to negotiate the "recovery-mode" parameter value to a value other than "none" from the value received in an F-OPEN request."

Rationale: Required to support the implementation of the Restart and Recovery functional units.

Part 3, Table A.10

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| Abstract Syntaxes | | | |
| FTAM unstructured text abstract syntax | o | m | o |

Rationale: The characteristics of the NITF digital image transferred is generally a large data file with binary-typed content. This parameter optional in case the users decided to optionally send unstructured text.

Part 3, Table A.10.2.2

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| Attribute Values | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

| | | | |
|---|---|---|---|
| Security Group (Initiator) | | | |
| Legal Qualifications | f | m | o |

Rationale: No requirement identified for this parameter.

Part 3, Table A.10.3.2.2

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| File Actions -Constraint Set | | | |
| Responder Action: | | | |
| Read | o | o | m |

Rationale: Required to mandate the "pull" function.

Part 3, Table A.11.9

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| File Deletion | | | |
| F-DELETE PDU (Initiator & Responder) | c | c | o |

Rationale: Required to provided limited management of the NITF files.

Part 3, Table 12.10

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| Read Attributes | | | |
| F-READ-ATTRIB PDU (I & R) | c | c | o |

Rationale: Required to provide limited file management of the NITF files.

Part 3, Table 12.16

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| Regime Recovery | | | |
| F-RECOVER PDU | c | c | m |

Rationale: Required to support the Restart and Recovery functional units.

Part 3, Table 12.19

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| Read Bulk Data | | | |
| F-READ | c | c | m |

Rationale: This is mandatory when the Read functional unit is implemented.

Part 3, Table 12.20

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| Write Bulk Data | | | |
| F-WRITE PDU | c | c | m |

Rationale: This is mandatory when the Write functional unit is implemented.

Part 3, Table A.11.21

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| End of Data Transfer | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

| | | | |
|---|---|---|---|
| F-DATA-END PDU | c | c | m |

Rationale: This parameter is mandatory if the Read or Write functional unit is implemented (see ISP 10607-4, A.10.

Part 3, Table A.11.24

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| Restart Data Transfer | | | |
| F-RESTART PDU | c | c | m |

Rationale: This parameter is mandatory if the Restart functional unit is implemented.

Part 3, Table 13.4

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| Service Class Field Detail | | | |
| Transfer & management Class | o | o | m (For Initiator only) |

Rationale: Required to provide transfer and limited management of the NITF files.

Part 3, Table A.12.5

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| Functional Unit Field Detail | | | |
| Read | o | o | m |
| Write | o | o | m |
| Recovery | o | o | m |
| Restart Data XFER | o | o | m |

Rationale: See responses above.

Part 3, Table A.12.10

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| Details of Charging | | | |
| Resource ID Term | m | m | o |
| Charging Unit Term | m | m | o |
| Charging Value Term | m | m | o |

Rationale: No requirement identified to support these parameters as mandatory.

Part 3, Table A.13

| Protocol Element/Parameter | Base(D) | ISP | DSP(P) |
|---|---|---|---|
| Document Types | | | |
| Entry Number FTAM-1 Object Descriptor | o | m | o |

Rationale: The characteristics of the NITF digital image transferred is generally a large data file with binary-typed content. This parameter was made optional in case the users decided to optionally send FTAM-1 type structures.

## C.1.1 Security

Mandatory Functional Groups: The Security attribute group, Concurrency control group, and Access Passwords are mandatory to ensure security of virtual filetstore access and transfer.

## C.1.2 Robustness and Quality of Service.

1. Mandatory Functional Groups: The Restart and Recovery functional units are mandatory to assist in file transfer.

2. Mandatory support for FTAM Phase 3: To provide restart and recovery functional units.



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

## C.2 Subject Term (Keyword) Listing

Communication Protocol Standards
Data Communications
Functional Profiles
Interoperability
Application
File transfer
Standards

## C.3 Preparing Activity

DISA-JIEO (Project DTMP-0008-04)

## C.4 Reviewing Activities

| | |
|---|---|
| Army : | SC, PT |
| Air Force: | 13, 17, 29, 33, 90 |
| DLA: | DH |
| DMA: | MP |
| DIA: | DI |
| DOT: | OST |
| NSA: | NS |
| OASD: | IQ, DO, IR |
| ODISC4: | AC |
| NAVY: | EC, CH, ND, TD, OM |
| USMC: | MC, CG |

## C.5 Custodians

| | |
|---|---|
| DISA: | DC |
| Army: | SC |
| Air Force: | 90 |
| Navy: | OM |
| DIA: | DI |
| NSA: | NS |
| USMC: | MC |
| DLA: | DH |
| Other: | Joint Staff/Architecture & Integration |
| | USSPACECOM |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

## INSTRUCTIONS

1. The preparing activity must complete blocks 1,2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| I RECOMMEND A CHANGE: | 1. DOCUMENT NUMBER<br>MIL-STD 2045-17508-3 | 2. DOCUMENT DATE *(YYMMDD)*<br>940729 |
|---|---|---|

3. DOCUMENT TITLE **FTAM Part 3: AFT11 - Simple File Transfer Service (unstructured)**

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME *(Last, First, Middle Initial)* | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS *(Include Zip Code)* | d. TELEPHONE *(Include Area Code)*<br>(1) Commercial<br>(2) DSN<br>*(If applicable)* | 7. DATE SUBMITTED *(YYMMDD)* |

8. PREPARING ACTIVITY **DEFENSE INFORMATION SYSTEMS AGENCY (DISA)**

| a. NAME | b. TELEPHONE *(Include Area Code)* | |
|---|---|---|
| Dr. F. D. Curcio | (1) Commercial<br>(908) 532-7732 | (2) DSN<br>922-7732 |
| c. ADDRESS *(Include Zip Code)*<br>Director, JIEO<br>ATTN: JEBBF, Bldg 283<br>Ft. Monmouth, NJ 07703-5613 | **IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:**<br>Defense Quality and Standardization Office<br>5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466<br>Telephone (703) 756-2340 DSN: 289-2340 | |



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the currentversion before use.