MIL-STD-2094(AS)
29 JULY 1980

MILITARY STANDARD

MISSILE GUIDANCE SET, AIM/RIM-7M, FIRST ARTICLE TESTS



FSC 1425

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, D.C. 20301

Missile Guidance Set, AIM/RIM-7M, First Article Test

MIL-STD-2094(AS)

1. This Military Standard is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, Engineering Specification and Standards Dept. (ESSD), Code 93, Lakehurst, N.J. 08733.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

CONTENTS

Paragraph			Page
	1.	SCOPE	1
	1.1	Scope	1
	1.2	Purpose	1
	1.3	Application	1
	2.	REFERENCED DOCUMENTS	2
	2.1	Issues of documents	2
	3.	DEFINITIONS	3
	3.1	Technical control	3
	3.2	Technical direction	3
	3.3	Procuring activity	3
	3.4	Observers	3
	3.5	Contractor	3
	3.6	Applicable handbooks	3
	3.7	Technical Observation	3
	4.	GENERAL REQUIREMENTS	4
	4.1	Deviations	4
	4.2	Responsibilities	4
	4.2.1	Contractor	4
	4.2.2	Government	4
	4.3	Handling Procedures	4
	4.4	Test schedules	4
	4.5	Classification of failures	4
	4.6	Failures investigation	5
	4.7	First article acceptance	5
	4.8	Qualification tests	5
	4.8.1	Extent of testing	5
	4.8.2	Telemetering installation and analysis	5
	4.8.3	Test failure verification	6
	4.8.4	Rework of missile guidance sets	6
	4.9	Reports	6
	5.	DETAILED REQUIREMENTS	7
	5.1	Classification of tests	7
	5.2	First article qualification test sample	7
	5.3	Certification of test equipment	7
	5.4	Test conditions	7
	5.5	Receiving inspection	7
	5.6	Individual test: intermediate level	8
	5.7	Configuration audit	8
	5.8	Captive carry test	8
	5.8.1	Installation on aircraft	9
	5.8.2	On-board aircraft check	9
	5.8.3	Carried flight conditions	9
	5.8.4	Scoring of captive carry tests	9
	5.9	Environmental failure rate test	9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

		Page
5.9.1	Functional test - - - - - - - - - - - - - - - -	10
5.9.2	Missile guidance set operating/environmental cycle -	10
5.9.3	Statistical test for EFRT - - - - - - - - - -	10
5.10	Quality conformance examination - - - - - - -	11
5.11	Captive flight test: three plane- - - - - - -	11
5.12	Free-flight test- - - - - - - - - - - - - - -	11

FIGURES

Figure	1.	First article qualification test sequence - - -	13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 Scope. This standard defines the government qualification testing of the First Article AIM/RIM-7M Missile Guidance Sets (MGS). The First Article Qualification test sample will consist of twenty (20) MGSs. The environmental tests and the reliability tests of MIL-G-85142(AS) (para. 4.1.2.1.1 and 4.1.2.2) are conducted by the contractor on a sample of nine (9) MGSs. This standard defines the tests which will be conducted on the remaining eleven (11) MGSs of the FAQT sample and three (3) residuals from the contractor tests. This qualification phase follows a program of extensive testing and certification by government activities and the contractor.

1.2 Purpose. The purpose of qualification testing is to:

a. Determine the ability of the First Article MGSs to meet the requirements as specified in MIL-G-85142(AS), MIL-G-85143(AS), MIL-G-85144(AS), and the contract.

b. Uncover defects related to the production of the First Article MGSs when subjected to an extended ground and airborne testing program.

c. Verify the missile configuration with respect to the technical documentation.

1.3 Application. This standard shall apply to the testing, by the Pacific Missile Test Center (PACMISTESTCEN), of fourteen (14) First Article MGSs produced by the contractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-G-85142(AS)	-Prime Item Product/Fabrication Specification for Guidance and Control Section for Guided Missile AIM/RIM-7M(U).
MIL-G-85143(AS)	-Critical Item Product Fabrication Specification Guidance Section for Guided Missile AIM/RIM-7M(U).
MIL-G-85144(AS)	-Critical Item Product Fabrication Specification Control Section for AIM/RIM-7M Guided Missile.
MIL-C-45662	-Calibration System Requirement.

STANDARDS

MILITARY

MIL-STD-781	-Reliability Design Qualification and Production Acceptance Tests: Exponential Distribution

HANDBOOKS

MILITARY

MIL-HDBK-261	-Tests, Intermediate Level for Guided Missile AIM/RIM-7M(U) with Test Set AN/DPM-21.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 Technical control. Technical control is defined as the specialized or professional guidance and direction exercised by an authority of the Naval establishment in technical matters. Included in technical control is authority to conduct, alter, or stop tests authorized by the procuring activity according to the dictates of safety or interference to other projects. Any alteration of tests shall not change the requirements of this standard.

3.2 Technical direction. Technical direction is defined as including the formulation of general test programs and detailed test plans, the preparation of articles to be tested, conduct of the test program, the evaluation of test data, the reporting of test results, and the reorientation of the test program and plans based on these data.

3.3 Procuring activity. The procuring activity is the Naval Air Systems Command.

3.4 Observers. Qualified personnel that will closely follow progress of the missile through test and flight evaluation.

3.5 Contractor. Reference to contractor herein means the Missile Guidance Set manufacturer.

3.6 Applicable handbooks. Any reference to applicable handbooks herein means those publications promulgated by the procuring activity for the adjustment, operation and maintenance of the equipments involved. Modified test procedures may be used subject to concurrence between the testing and procuring activities and the contractor.

3.7 Technical observation. Technical observation is defined as observation or review of the following:

a. General test programs and detail test plans

b. Preparation of articles to be tested

c. Prosecution of articles' test

d. Evaluation of test data

e. Report of test results

f. Reorientation of the test program.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Deviations. Deviations from this standard shall not be permitted except by written authorization from the contracting officer.

4.2 Responsibilities

4.2.1 Contractor. The contractor has the right to observe all tests performed by PACMISTESTCEN. If he chooses to do so, he may indicate by concurrence or nonconcurrence that each Missile Guidance Set has or has not been prepared for test and checked out in accordance with applicable handbooks. When the contractor does not concur that the Missile Guidance Set, other missile components, missile test equipment, aircraft or aircraft test equipment were checked out in accordance with applicable handbooks or instructions, he shall, within 48 hours of the incident, inform the procuring activity, in writing, with information copies to PACMISTESTCEN and the cognizant design activity, of the particulars concerning any improper procedure or check.

4.2.2 Government. The First Article Qualification Test Program will be conducted by PACMISTESTCEN. PACMISTESTCEN will exercise technical direction (3.2) and technical control (3.1) of the program. The Government will furnish all test equipment required to conduct this test program and is responsible for the performance of all inspections and tests specified herein. PACMISTESTCEN shall notify the contractor a minimum of 48 hours prior to the start of testing of the First Article Missile Guidance Sets. PACMISTESTCEN shall notify the procuring activity of the results of the tests of the sample immediately upon completion of the tests of the sample. Upon request all data will be made available to the contractor.

4.3 Handling procedure. The First Article Qualification test articles will be handled, transported, stored, prepared, and ground tested in accordance with applicable handbooks and instructions.

4.4 Test schedules. PACMISTESTCEN will commence testing of individual MGSs of the First Article Qualification test articles upon receipt at the testing activity and after adequate notification (4.2.2) has been provided to the contractor.

4.5 Classification of failures. Failures detected during any portion of the testing program will be relevant and accountable unless they are classified in one or more of the categories constituting non-relevant failures, listed below:

a. Caused by operator or procedural error

b. Failure of approved limited life parts, when failure occurs after the stipulated life period

c. Secondary failures, when analysis confirms the failure to be induced by failure of another part. However, at least one primary failure must be charged when a secondary failure is claimed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

d. Test equipment induced failures when caused by a condition external to the equipment under test

e. Failure for which corrective action has been taken but not incorporated in the hardware

Classification and the determination that a failure has occurred will be made by PACMISTESTCEN acting for the procuring activity. In the event the contractor does not concur with the determination by PACMISTESTCEN, he may submit his nonconcurrence to the procuring activity, within 48 hours, for consideration in the final decision.

4.6 Failures investigation. Failures will be investigated to determine:

a. The cause of the failure

b. The advisability of continued or additional testing

c. A corrective course of action

d. Whether the failure should preclude or suspend qualification of the First Article MGSs

The final disposition of each failure resides with the procuring activity.

4.7 First article acceptance. Acceptance of the first articles will be determined by the procuring activity based upon the review and evaluation of the data from the tests and examinations required in Section 5. Included in this determination will be consideration of each individual failure cause, failure modes criticality, corrective action proposed by the contractor, and compliance of the MGS with the requirements of all applicable specifications and drawings.

4.8 Qualification tests. First Article Qualification tests shall be performed in accordance with Section 5 of this standard. PACMISTESTCEN will randomly select test articles for accomplishment of those tests which are not to be performed on all articles of the First Article test sample.

4.8.1 Extent of testing. A test once started may be run to completion (provided damage will not result) even though a failure to meet specified performance occurs during the test. Testing of the First Article Qualification test article will be terminated when all tests are completed.

4.8.2 Telemetering installation and analysis. Telemetering equipment will be installed by PACMISTESTCEN, in accordance with applicable procedures and instructions, in those missiles which are selected for captive carry tests, captive flight and free-flight tests. PACMISTESTCEN will monitor and record telemetered information from each captive flight launch or attempted launch. Information so recorded will be analyzed by PACMISTESTCEN following each flight. The results of such analysis will be contained in the Test Reports (4.9). Information so recorded will be provided to the contractor upon request.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

4.8.3 Test failure verification. Missile Guidance Sets which fail to pass a prescribed test may be retested to establish that the article under test (not the test equipment, instrumentation or aircraft) was at fault. PACMISTESTCEN shall also make a determination of whether each test failure is relevant or non-relevant, as defined in Section 4.5. A non-relevant failure will be considered "No Test" and excluded from scoring. The defective component (i.e., transistor, resistor, switch, etc.) or tray (i.e., RF unit) which caused the MGS to fail will be identified by PACMISTESTCEN. PACMISTESTCEN will detail the circumstances and results of examination of each test failure in the Test Reports (4.9).

4.8.4 Rework of missile guidance sets. MGSs determined to have failed in First Article Qualification testing may be reworked by the contractor and returned to PACMISTESTCEN for completion of testing, in accordance with the terms of the contract.

4.9 Test reports. Within 48 hours after each test failure, and after each launching, PACMISTESTCEN shall submit a preliminary report of the test results to the procuring activity with a copy to the contractor. Within 60 days following completion of testing, PACMISTESTCEN will submit a final report to the procuring activity with a copy to the contractor. If the contractor does not concur with PACMISTESTCEN's final report, he shall inform the procuring activity directly with an information copy of his nonconcurrence to PACMISTESTCEN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Classification of tests. Tests will be classified as follows:

a. Receiving Inspection (5.5)

b. Individual Test: Intermediate Level (5.6)

c. Configuration Audit (5.7)

d. Captive Carry Test (5.8)

e. Environmental Failure Rate Test (5.9)

f. Quality Conformance Examination (5.10)

g. Captive Flight Test; Three-Plane (5.11)

h. Free-Flight Test (5.12)

5.2 First article qualification test sample. The First Article Qualification test sample will consist of twenty (20) MGSs. In accordance with the contract schedule the administrative contracting officer (ACO) shall select nine (9) MGSs from the First Article production quantity for environmental and reliability demonstration testing by the contractor. The ACO shall select two (2) MGSs for Configuration Audit (5.7) and direct that they be held in bonded storage at the contractor's facility pending arrival of the audit team. The ACO shall direct shipment of the remaining First Article quantity of nine (9) MGSs to PACMISTESTCEN. PACMISTESTCEN will select random sub-samples of the nine (9) MGSs for testing as illustrated in Figure 1. Three (3) residual MGSs from the contractor's reliability demonstration test will also become a part of the government test sample.

5.3 Certification of test equipment. All electrical, electronic, torque or other measuring equipment used in acceptance testing and in mechanical assembly will be calibrated in accordance with requirements of MIL-C-45662. The Fleet Analysis Center will certify missile performance test equipment. PACMISTESTCEN will certify that all test equipment is within its calibration cycle before testing begins, and will maintain records of testing throughout the First Article Qualification Test Program.

5.4 Test conditions. Test conditions will be in accordance with applicable handbooks and specifications, as defined in Section 3 for the type test being performed.

5.5 Receiving inspection. PACMISTESTCEN will unpack the First Article MGSs and perform the receiving inspection. This inspection is a visual examination to insure that no shipment damage or shortages have occurred. All MGSs which fail this inspection will be returned to the contractor for repair unless PACMISTESTCEN determines that the observed discrepancies will not affect subsequent tests. After repair, the MGSs will be returned to PACMISTESTCEN and resubmitted to the receiving inspection.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:56Z
Check the source to verify that this is the currentversion before use.

5.6 Individual test: intermediate level. The Individual Tests: Intermediate Level will be conducted in accordance with approved intermediate level test requirements as specified in MIL-HDBK-261 applicable to the test equipment utilized (i.e., AN/DPM-21). The individual test (intermediate level) serves two purposes: (1) it provides a weapons station level test to evaluate the MGS for acceptable quality level specified as follows: At least 95 percent of the missiles which have been accepted shall pass the individual test when unpackaged at the first point of checkout; and (2) it provides the test failure verification of Section 4.8.3. Noncompliance of the first article MGSs with the acceptance quality level shall be demonstrated if three (3) or more Missile Guidance Sets of the First Article Qualification test sample are determined to have incurred relevant failures (4.5). Three failures demonstrates noncompliance with the acceptance quality level at the 0.99 confidence level. Compliance with the acceptance quality level cannot be demonstrated due to the limited sample size.

5.7 Configuration audit. Two (2) MGSs shall be randomly selected by the ACO from the First Article Sample MGSs for a configuration audit. The two (2) MGSs selected for configuration audit shall be placed in bonded storage at the contractor's facility pending arrival of the audit team. The purpose of the configuration audit is the formal examination of a test article against its technical documentation in order to establish the test article's achieved configuration. The configuration audit has two phases: (1) the functional configuration audit (FCA), which will be performed on the contractor's test equipment and; (2) the physical configuration audit (PCA). The FCA checks the specified performance of the MGS, while the PCA compares the MGS drawings and technical description with the physical hardware. The configuration audit shall be performed at the contractor's facility by a government audit team selected by PACMISTESTCEN with the concurrence of the procuring activity. The configuration audit will be conducted to the module level (level 3) and selected critical components in accordance with a configuration audit plan approved by the procuring activity. The contractor shall support the configuration audit by providing personnel for test equipment operation and documentation retrieval, work spaces for the audit team, access to test equipment and other support as specified in the contract. Any discrepancies will be reported by PACMISTESTCEN to the contractor and the procuring activity.

5.8 Captive carry test. Six (6) MGSs, which will subsequently be launched, shall be subjected to the captive carry test. During this test each MGS, assembled with government furnished equipment (GFE) components into a flight ready round, will be loaded on an F-4, F-14 or F-15 aircraft and flown in the operational environment a minimum of 10 hours. Telemetry equipment may (at PACMISTESTCEN option) be installed on those units designated for the captive flight/pre-flight tests. Should a relevant failure occur, the MGS may be reworked (4.8.4) and reintroduced into the test program. The purpose of this test is to insure correct missile/aircraft interface and functioning prior to free flight test and to correlate failure data from these tests with that obtained from the Environmental Failure Rate Test (5.9). The captive carry test will consist of:

a. Telemetering installation (4.8.2)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:56Z
Check the source to verify that this is the current version before use.

b. Assembly with GFE components into a flight ready round (4.3)

c. Installation on aircraft (5.8.1)

d. On-board aircraft check (5.8.2)

e. Airborne carried flight (5.8.3)

f. Post-flight Individual Test after 10 hours of captive flight (5.6)

The installation of telemetering equipment will be at the option of PACMISTESTCEN.

5.8.1 Installation on aircraft. Missile installation on aircraft, removal from aircraft, and associated inspections shall be in accordance with applicable handbooks. PACMISTESTCEN shall check the test aircraft in accordance with applicable handbooks with the contractor observing if he so desires. This check shall be the basis for the test activity determination that the essential non-expendable elements of the weapon system are operating within normal accuracy limits and that equipment and procedures available to Fleet personnel are being used. Adjustments and servicing to assure such accuracy shall be accomplished as necessary.

5.8.2 On-board aircraft check. On-board aircraft check of each Missile Guidance Set shall be in accordance with applicable handbooks for the aircraft. When telemetering equipment is installed in the missile, analysis of telemetered data will be in accordance with 4.8.2.

5.8.3 Carried flight conditions. During airborne carried flight the carriage aircraft shall remain within its approved flight envelope. Each Missile Guidance Set shall be subjected to at least ten (10) hours airborne carried flight time, which may include repetitive aircraft landings.

5.8.4 Scoring of captive carry tests. Due to the limited number of captive carry hours to be accumulated, the captive carry test will not be scored on a pass/fail statistical basis. At the completion of the captive carry test the total number of Missile Guidance Set captive-carry-hours and the total number of Missile Guidance Sets which exhibited a malfunction in either the telemetry checks (5.8.a) or the post-flight individual tests (5.8.f) shall be tabulated and reported. Failures will be investigated for possible corrective action.

5.9 Environmental failure rate test. Six (6) Missile Guidance Sets of the First Article which have passed the individual test (5.6) will be selected for the environmental failure rate test (EFRT). The EFRT, conducted under laboratory conditions, is designed to simulate captive flight parameters and ensure a direct correlation to anticipated Fleet operational reliability through the faithful reproduction of those operational environmental conditions which are believed to be contributing factors to random failure rates. This test serves three purposes:

a. To perform a flight test simulation to demonstrate, at an appropriate statistical confidence level, projected reliability under simulated captive carry conditions

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:56Z
Check the source to verify that this is the current version before use.

b. To establish a data base for future use of the EFRT for production verification tests.

c. To identify deficiencies in the contractor's product

This test shall consist of three elements:

a. A functional test

b. An operating/environmental cycle

c. A statistical test

The results of the EFRT will be reported by PACMISTESTCEN to the procuring activity, the contractor and the cognizant design activity.

5.9.1 Functional test. The Missile Guidance Set functional tests will consist of intermediate level tests. These tests shall be as specified in MIL-HDBK-261 with some modification due to restrictions imposed by environmental test requirements (missile cannot be rolled while under vibration due to rigid mounting on vibration fixture). The individual test of 5.6 shall be performed for information on each Missile Guidance Set indicated to have failed during environmental testing, and on each Missile Guidance Set which has completed environmental testing in order to determine its readiness for subsequent tests or for disposition.

5.9.2 Missile guidance set operating/environmental cycle. The Missile Guidance Set operating/environment cycle shall be repetitions of a combined sequence of temperature, acoustic pressure, mechanically induced vibration/ shock, and duty cycle. This sequence will, in accordance with MIL-STD-781C, reproduce the levels and durations of captive-flight stresses corresponding to tactical AIM-7M mission-profiles as defined by Operational Test and Evaluation Force (F-14 and F-18) and Air Force Test Evaluation Center (F-15). The correspondence between mission flight conditions and Missile Guidance Set stresses will be determined from captive-flight measurements. The operating cycle will include, in addition to the reproduction of the tactical duty cycles, a period for Functional Test (5.9.1) which will occur no more often than every four hours and no less often than every eight hours. This functional test may be performed during any portion of the environmental cycle. Its duration will be limited so as to avoid failure of the Missile Guidance Set due to excessive self-heating.

5.9.3 Statistical test for EFRT. Each Missile Guidance Set failing to meet the performance requirements of the functional test (5.9.1) will be classified as a relevant or non-relevant failure, in accordance with (4.5). The statistical test for EFRT shall be as specified in MIL-STD-781C Test Plan XIV with a mean time between failure (θo) as specified in the contract. Test assessment will be used to establish a statistical history of Missile Guidance Set performance under EFRT and will be reported by PACMISTESTCEN for information purposes to the procuring activity, the contractor and the cognizant design activity.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

5.10 Quality conformance examination. At least one sample article will be selected from those sets which were determined to have failed (4.8.3) in prior tests, or which have successfully completed the required tests of the EFRT (5.9) or the captive carry flight test (5.8). The quality conformance examination will consist of Missile Guidance Set disassembly, internal inspection for quality of workmanship, and selected functional test of subsections in accordance with depot level maintenance procedures as specified in MIL-G-85143(AS), and MIL-G-85144(AS). Any discrepancies observed in the Missile Guidance Set in this test will be reported by PACMISTESTCEN to the procuring activity, the contractor, and the cognizant design activity with recommendations for appropriate actions.

5.11 Captive flight test: three plane. Captive flight tests may be performed on one (1) missile prior to the free-flight tests. This test will utilize a three plane captive format one airplane to carry the missile being tested (simulating the missile in flight); one to illuminate the missile and the target (simulating the firing aircraft); and the third to act as the target. The missile shall be configured with telemetry and the seeker and receiver function shall be monitored. This test is designed to provide:

a. A dynamic simulation of free flight tests

b. Verification of the performance of the target seeker head tracking and receiver sensitivity is within acceptable limits for flight testing.

c. An evaluation of MGS performance under the following environments:

(1) Chaff

(2) Clutter

(3) Noise jamming,

d. A final check of airborne telemetry and aircraft interface function prior to free-flight testing.

5.12 Free-flight test. The free-flight test will consist of six (6) live missile firings conducted against a sample of airborne targets with different characteristics. The free-flight test parameters will be selected from within the design launch envelope. PACMISTESTCEN will recommend free-flight launch parameters to the procuring activity following analysis of free-flight tests conducted during CTE/JTE. Each planned free-flight test shall be evaluated by simulation prior to launch. Missiles which have completed other First Article Tests may be included in the free-flight tests at the discretion of the procuring activity.

The purposes of the free flight tests are to:

a. Test the missile under actual operating flight conditions

b. Discover discrepancies not possible to detect in any other tests

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the current version before use.

c. Collect engineering data for validation of the non-destructive elements employed in the test program

d. Evaluate the flight characteristics of the First Article missiles

e. Verify that the production techniques employed by the contractor in the manufacture of the First Article do not degrade missile performance.

Preparing Activity:
Navy - AS
(Project No. 1425-N-101)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

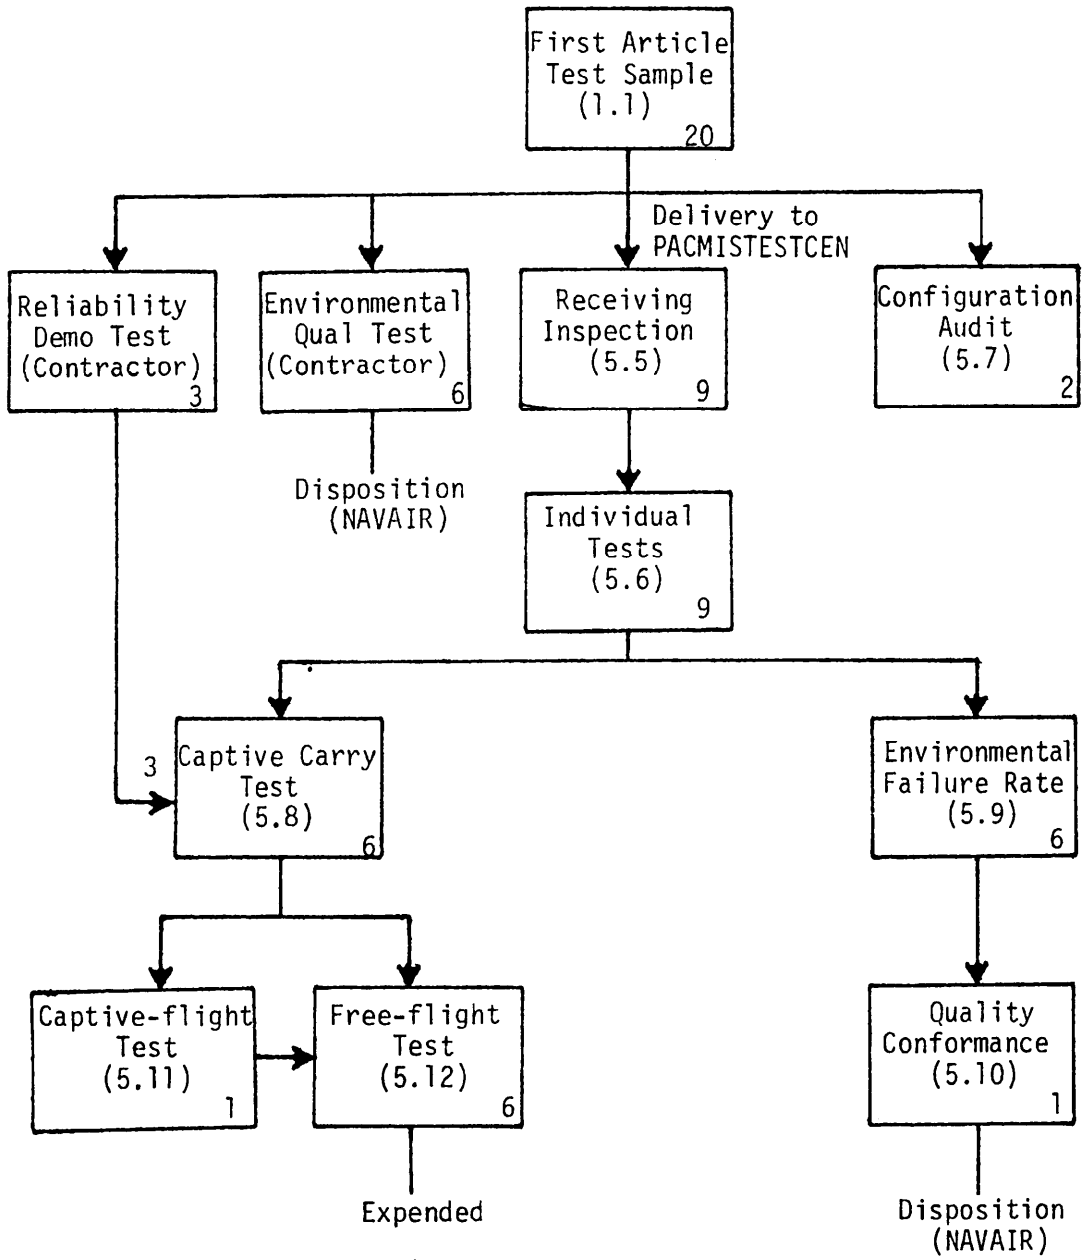


FIGURE 1. First article qualification test sequence

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-STD-2094(AS) MISSILE GUIDANCE SET, AIM/RIM-7M, FIRST ARTICLE TESTS

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards Department
(ESSD) Code 93
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.