MIL-STD-2095(AS)

29 JULY 1980

MILITARY STANDARD

MISSILE GUIDANCE SET, AIM/RIM-7M, PRODUCTION VERIFICATION TEST

FSC 1425

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, D.C. 20301

MISSILE GUIDANCE SET, AIM/RIM-7M, PRODUCTION VERIFICATION TESTS

MIL-STD-2095(AS)

1. This standard is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, Engineering Specification and Standards Dept. (ESSD), Code 93, Lakehurst, N.J. 08733.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

CONTENTS

Paragraph			Page
	1.	SCOPE	1
	1.1	Scope	1
	1.2	Purpose	1
	1.3	Application	1
	2.	REFERENCED DOCUMENTS	2
	2.1	Issues of documents	2
	3.	DEFINITIONS	3
	3.1	Technical control	3
	3.2	Technical direction	3
	3.3	Observers	3
	3.4	Contractor	3
	3.5	Applicable handbooks	3
	3.6	Technical observation	3
	3.7	Lot	3
	3.8	Sample	3
	3.9	Test element or article or sample article	4
	3.10	Relevant failure	4
	4.	GENERAL REQUIREMENTS	5
	4.1	Deviations	5
	4.2	Responsibilities	5
	4.2.1	Contractor	5
	4.2.2	Government	5
	4.3	Lot formation	5
	4.4	Handling procedure	5
	4.5	Test schedules	5
	4.6	Satisfactory lot	5
	4.7	Unsatisfactory lot	6
	4.8	Lot resubmission	6
	4.9	Verification tests	6
	4.9.1	Extent of testing	6
	4.9.2	Cummulative production criteria	6
	4.9.3	Telemetering installation and analysis	7
	4.9.4	Test failure verification	7
	4.9.5	Rework of missile guidance set	7
	4.10	Test reports	7
	5.	DETAILED REQUIREMENTS	8
	5.1	Classification of tests	8
	5.2	Sampling	8
	5.3	Certification of test equipment	8
	5.4	Test conditions	8
	5.5	Receiving inspection	8
	5.6	Individual test: intermediate level	9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

CONTENTS (Continued)

			Page
Paragraph	5.7	Environmental failure rate test	9
	5.7.1	Functional test	9
	5.7.2	Missile guidance set operating/environments cycle	10
	5.7.3	Statistical test for EFRT	10
	5.8	Captive-carry test	10
	5.8.1	Installation on aircraft	10
	5.8.2	On-board aircraft check	11
	5.8.3	Carried flight conditions	11
	5.9	Free-flight tests	11
	5.10	Quality conformance examination	11
	5.11	Cumulative scoring of test results	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 Scope. This standard delineates the requirements of the Naval Air Systems Command for the Production Verification Test (PVT) program of the Missile Guidance Set, for Guided Missile AIM/RIM-7M.

1.2 Purpose. The purpose of the PVT program is to permit the government to determine whether production quantities continue to meet the performance and reliability values as specified in MIL-G-85142, MIL-G-85143, MIL-G-85144 and the procurement contract.

1.3 Application. This standard shall apply to the testing by, the Government Test Activity (GTA), of fifteen (15) production Missile Guidance Sets produced by the contractor on a schedule to be determined by the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect of the date of invitation for bids or requests for proposal form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-G-85142(AS)	Prime Item Product Fabrication Specification for Guidance and Control Section for Guided Missile AIM/RIM-7M(U).
MIL-G-85143(AS)	Critical Item Product Fabrication Specification, Guidance Section for Guided Missile AIM/RIM-7M(U).
MIL-G-85144(AS)	Critical Item Product Fabrication Specification Control Section for AIM/RIM-7M Guided Missile.
MIL-C-45662	Calibration System Requirement.

STANDARDS

MILITARY

MIL-STD-781	Reliability Design Qualification and Production Acceptance Tests: Exponential Distribution.
MIL-STD-2091(AS)	Tests, Intermediate, Level for Guided Missile AIM/RIM-7M(U) with Test Set AN/DPM-21.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 Technical control. Technical control is defined as the specialized or professional guidance and direction exercised by an authority of the Naval Establishment in technical matters. Included in technical control is authority to conduct, alter, or stop tests authorized by the procuring activity according to the dictates of safety or interference to other projects. Any alteration of tests shall not change the requirements of this standard.

3.2 Technical direction. Technical direction is defined as including the formulation of general test programs and detailed test plans, the preparation of articles to be tested, conduct of the test program, the evaluation of test data, the reporting of test results, and the reorientation of the test program and plans based on these data.

3.3 Observers. Qualified personnel that will closely follow and document progress of the missile through test and flight evaluation.

3.4 Contractor. Reference to contractor herein means the Missile Guidance Set manufacturer.

3.5 Applicable handbooks. Any reference to applicable handbooks herein means those publications promulgated by the procuring activity for the adjustment, operation and maintenance of the equipment involved. When available publications do not completely reflect current equipment, modified test procedures may be used subject to concurrence between the testing and procuring activities and the contractor. If the contractor does not concur he shall indicate his nonconcurrence as in paragraph 4.2.1.

3.6 Technical observation. Technical observation is defined as observation or review of the following:

a. General test programs and detail test plans

b. Preparation of articles to be tested

c. Prosecution of articles' test

d. Evaluation of test data

e. Report of test results

f. Reorientation of the test program

3.7 Lot. Lot is defined as a group of Missile Guidance Sets which is a candidate for acceptance into Government inventory.

3.8 Sample. Sample is defined as all of the articles (Missile Guidance Sets) selected from the lot upon which PVT may or will be performed.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:56Z
Check the source to verify that this is the current version before use.

3.9 Test element or article or sample article. Test element or article or sample article is defined as a single article (Missile Guidance Set) of the lot sample.

3.10 Relevant failure. All failures detected during the PVT and verified shall be classified as relevant and accountable unless determined to be non-relevant. Failures falling into one or more of the categories below will be classified as non-relevant.

a. Failure resulting from design incompatibility

b. Failure caused by operator or procedural error

c. Failure of approved limited life parts, when failure occurs after the stipulated life period

d. Secondary failures, when analysis confirms the failure to be induced by failure of another part. However, at least one primary failure must be charged when a secondary failure is claimed

e. Test equipment induced failures when caused by a condition external to the equipment under test

f. Failure for which corrective action has been taken but not incorporated in the hardware

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Deviations. Deviations from this standard shall not be permitted except by written authorization from the contracting officer.

4.2 Responsibilities

4.2.1 Contractor. The contractor has the right to observe all tests performed by the GTA. If he chooses to do so, he may indicate by concurrence of non-concurrence that each Missile Guidance Set has or has not been prepared for test and checked out in accordance with applicable handbooks. When the contractor does not concur that the Missile Guidance Set, other missile components, missile test equipment, aircraft or aircraft test equipment were checked out in accordance with applicable handbooks or instructions, he shall, within 48 hours of the incident, inform the procuring activity, in writing, with information copies to the GTA and the cognizant design activity, of the particulars concerning any improper procedure or check.

4.2.2 Government. The PVT program will be conducted by the GTA designated by the procuring activity. The GTA will exercise technical direction (3.2) and technical control (3.1) of the PVT program. The Government will furnish all test equipment required to conduct this test program and is responsible for the performance of all inspections and tests specified herein. The GTA will notify the contractor at the earliest practicable date, but no less than 48 hours before, when the unpacking and testing of each sample of Missile Guidance Sets is scheduled to start in order that the contractor may be present to observe any and all tests if he desires. The GTA shall notify the procuring activity of the results of the tests of each sample immediately upon completion of the tests of each sample. Upon request all data will be made available to the contractor.

4.3 Lot formation. Missile Guidance Sets will be formed into lots by the procuring activity for the purpose of PVT.

4.4 Handling procedure. Production lot sample selected for PVT will be handled, transported, stored, prepared, and ground tested as specified in applicable handbooks and instructions.

4.5 Test schedules. The GTA will commence the testing of a lot sample after receiving notification from the cognizant Government representative at the contractor's plant that the lot has successfully completed the required test as specified in MIL-G-85142.

4.6 Satisfactory lot. A production lot shall be considered satisfactory when the requirements set forth in Section 5 of this standard have been met. When a lot sample successfully meets the requirements, the GTA shall so advise the procuring activity and the cognizant design activity. The procuring activity shall then notify the Government representative at the contractor's plant that the lot is of satisfactory status. The residual articles of the sample will be disposed of as directed by the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:56Z
Check the source to verify that this is the current version before use.

weight of contents in shipping containers shall not exceed 250 pounds.

4.7 Unsatisfactory lot. When a lot sample fails to meet the requirements set forth in Section 5 of this standard, the following action shall be taken:

a. The GTA shall immediately notify the procuring activity and the cognizant design activity of the unsatisfactory status of the lot sample; notification of the unsatisfactory status of the lot sample shall include as a minimum the serial numbers of Missile Guidance Sets which failed each test, and the mode of failure. The GTA will return all unexpended Missile Guidance Sets from the unsatisfactory lot to the contractor or dispose of them as directed by the procuring activity.

b. Upon notification of the unsatisfactory status of the lot sample, the procuring activity will notify the cognizant Government representative at the contractor's plant that the lot is unsatisfactory.

4.8 Lot resubmission. The contractor may resubmit the lot for PVT when the following steps have been taken.

a. The contractor shall investigate and determine the cause of failure to meet the requirements in Section 5 of this specification and shall recommend to the procuring activity the appropriate action to be taken to correct the deficiencies in the lot as well as in the returned test samples. Upon the formulation of a corrective course of action by the contractor and the procuring activity, the contractor shall proceed to correct the deficiencies.

b. The cognizant Government representative at the contractor's plant will select new samples from the lot in accordance with Section 5 of this standard.

c. The samples of the resubmitted lot shall be tested in accordance with this standard as if from a new lot.

4.9 Verification tests. Production verification tests shall be performed in accordance with Section 5 of this standard. The GTA will randomly select test articles for accomplishment of those tests which are not to be performed on all articles of the PVT sample.

4.9.1 Extent of testing. A test once started may be run to completion (provided damage will not result) even though a failure to meet specified performance occurs during the test. Testing of a lot sample will be terminated when all tests are completed. When the allowable number of failures, specified in Section 5, has been exceeded the procuring activity will have the options to continue or to terminate testing.

4.9.2 Cumulative production criteria. The cumulative results of the lot verification testing will be plotted in accordance with paragraph 5.11. If the test results of the lot sample causes any cumulative plot to fall in the unsatisfactory region, the procuring activity will investigate the unsatisfactory performance and formulate a course of corrective action.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

4.9.3 Telemetering installation and analysis. Telemetering equipment will be installed by the GTA, in accordance with applicable procedures and instructions, in those missiles which are selected for free-flight tests. The GTA will monitor and record telemetered information from each launch or attempted launch. Information so recorded will be analyzed by the GTA following each flight; the results of such analysis will be contained in the Test Reports (4.10). Information so recorded will be provided to the contractor upon request.

4.9.4 Test failure verification. Missile Guidance Sets which fail to pass a prescribed test may be retested to establish that the article under test (not the test equipment, instrumentation or aircraft) was at fault. The GTA shall also make a determination of whether each test failure is relevant, as defined in Section 3.10, or non-relevant. A non-relevant failure will be considered "No Test" and excluded from scoring. The defective component (i.e., transistor, resistor, switch, etc.) or tray (i.e., RF unit) which caused the Missile Guidance Set to fail will be identified by the GTA. The GTA will detail the circumstances and results of examination of each test failure in the Test Reports (4.10).

4.9.5 Rework of missile guidance set. Missile Guidance Sets from production lot samples which fail will be returned to the contractor for rework in accordance with the terms of the contract.

4.10 Test reports. Within 48 hours after completion of lot sample testing the GTA will submit a preliminary report of the results to the procuring activity with a copy to the contractor. Within 60 working days following completion of testing the GTA will submit five copies of the final lot report to the procuring activity and one copy to the contractor. If the contractor does not concur with the testing activity's final report he shall inform the procuring activity directly with an information copy of this nonconcurrence to the testing activity. In such cases of nonconcurrence the procuring activity's determination shall be final.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the currentversion before use.

5. DETAILED REQUIREMENTS

5.1 Classification of tests. Tests will be classified as follows:

a. Receiving inspection (5.5)

b. Individual test (5.6)

c. Environmental Failure Rate Test (5.7)

d. Captive-flight test (5.8)

e. Free-flight test (5.9)

f. Quality conformance examination (5.10)

5.2 Sampling. The lot sample for the PVT will be fifteen (15) Missile Guidance Sets in number. The sample will be selected by the procuring activity. Once a Missile Guidance Set is selected as a part of the sample, no further inspection or adjustment shall be performed by the contractor. The lot sample selected will be tested as specified herein. Subsamples of these 15 missiles will be randomly selected by the GTA for testing as illustrated in figure 1. Additional lot sample missiles, if required, will be selected from the lot according to the same procedures as used for the primary lot sample.

5.3 Certification of test equipment. All electrical, electronic torque or other measuring equipment used in acceptance testing and in mechanical assembly will be calibrated in accordance with requirements of MIL-C-45662 and certified by Fleet Analysis Center, Corona as required. The GTA will certify that all test equipment is within its calibration cycle before testing of a lot sample begins, and will maintain records of testing throughout each production contract test program. The accuracy of the test equipment will be such as to satisfy requirements as specified in MIL-STD-2091(AS).

5.4 Test conditions. Test conditions will be as specified in applicable handbooks and specifications, as defined in Section 3, for the type test being performed.

5.5 Receiving inspection. Upon notification that a lot has passed required tests as specified in MIL-G-85142, the GTA will unpack all sample articles from that lot and perform the receiving inspection as specified in the applicable handbook or instructions. This inspection is performed to ensure that lot sample articles were not damaged during shipment and that no shortages have occurred. All Missile Guidance Sets which fail this inspection will be removed from the lot sample and returned to the contractor for rework in accordance with the terms of the contract. Replacement Missile Guidance Sets will then be selected from the same lot by the cognizant Government representative at the contractor's plant and forwarded to the GTA to complete the lot sample.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:56Z
Check the source to verify that this is the currentversion before use.

5.6 Individual test: intermediate level. All Missile Guidance Sets of the lot sample which have passed the receiving inspection will be subjected to the Individual Test. The Individual Test will be conducted as specified in MIL-STD-2091(AS) as applicable to the test equipment utilized. Missile Guidance Sets failing to pass this test will be processed as specified in 4.9.4 (Test Failure Verification). If three or more relevant failures are determined to have occurred in the sample, the lot sample will be of unsatisfactory status and the provisions of 4.7 (Unsatisfactory) and 4.8 (Lot Resubmission) will apply. The individual tests will also be scored cumulatively in accordance with 5.11 (Cumulative Scoring of Test Results).

5.7 Environmental failure rate test. Ten (10) Missile Guidance Sets of the lot sample which have passed the Individual Test will be selected for the Environmental Failure Rate Test (EFRT). The EFRT, conducted under laboratory conditions, is designed to simulate captive-flight parameters and ensure a direct correlation to anticipated Fleet operational reliability through the faithful reproduction of those operational environmental conditions which are believed to be contributing factors to random failure rates. This test serves three purposes:

a. to perform a flight test simulation to demonstrate, at an appropriate statistical confidence level, projected reliability under simulated captive carry conditions

b. to establish a data base for future use of the EFRT

c. to identify deficiencies in the contractor's product

This test shall consist of three elements:

a. a functional test

b. an operating/environmental cycle

c. a statistical test

The results of the EFRT will be reported by the GTA to the procuring activity, the contractor and the cognizant design activity. The EFRT will be scored for determination of lot status.

5.7.1 Functional test. The Missile Guidance Set functional tests will consist of intermediate level tests as specified in MIL-STD-2091(AS) with some modification due to restrictions imposed by environmental test requirements (missile cannot be rolled while under vibration due to rigid mounting on vibration fixture). The individual test of 5.6 shall be performed for information on each Missile Guidance Set indicated to have failed during environmental testing, and on each Missile Guidance Set which has completed environmental testing in order to determine its readiness for subsequent tests or for disposition.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:56Z
Check the source to verify that this is the current version before use.

5.7.2 Missile guidance set operating/environmental cycle. The Missile Guidance Set operating/environment cycle shall be repetitions of a combined sequence of temperature, acoustic pressure, mechanically induced vibration/shock, and duty cycle. This sequence will, in accordance with MIL-STD-781C, reproduce the levels and durations of captive-flight stresses corresponding to tactical AIM-7M mission-profiles as defined by Operational Test and Evaluation Force (F-14 and F-18) and Air Force Test Evaluation Center (F-15). The correspondence between mission flight conditions and Missile Guidance Set stresses will be determined from captive-flight measurements. The operating cycle will include, in addition to the reproduction of the tactical duty cycles, a period for Functional Test (5.7.1) which will occur no more often than every four hours and no less often than every eight hours. This functional test may be performed during any portion of the environmental cycle. Its duration will be limited so as to avoid failure of the Missile Guidance Set due to excessive self-heating.

5.7.3 Statistical test for EFRT. Each Missile Guidance Set failing to meet the performance requirements of the functional test (5.7.1) will be classified as a relevant or non-relevant failure, in accordance with 4.9.4. An assessment will be used to establish a statistical history of lot performance under EFRT and will be reported by the GTA for information purposes to the procuring activity; the contractor and the cognizant design activity. The test assessment will be made as specified in Test Plan XIV of MIL-STD-781C with a mean time between failure (θ_0) as specified in the procurement contract.

5.8 Captive-carry test. Four (4) Missile Guidance Sets of the lot sample which have passed the Individual Test will be selected for the captive-carry test. Missile Guidance Sets which fail in this test will be processed in accordance with 4.9.4. Cumulative scoring of the test results will be in accordance with 5.11. The captive-carry test will consist of:

a. Assembly with GFE components into a flight ready round (4.4)

b. Installation on aircraft (5.8.1)

c. On-board aircraft check (5.8.2)

d. Airborne carried flight (5.8.3)

e. Post-flight Individual Test after 10 hours of captive-flight (5.6)

5.8.1 Installation on aircraft. Missile installation on aircraft, removal from aircraft, and associated inspections shall be as specified in applicable handbooks. The GTA will check the test aircraft as specified in applicable handbooks with the contractor observing if he so desires. This check will be the basis for the test activity determination that the essential non-expendable elements of the weapon system are operating within normal accuracy limits and that equipment and procedures available to Fleet personnel are being used. Adjustments and/or servicing to assure such accuracy will be accomplished as necessary.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

5.8.2 On-board aircraft check. On-board aircraft check of each Missile Guidance Set will be as specified in applicable handbooks for the aircraft. When telemetering equipment is installed in the missile, analysis of telemetered data will be in accordance with 4.9.3.

5.8.3 Carried flight conditions. During airborne carried flight, the carriage aircraft will remain within its approved flight envelope. Each Missile Guidance Set will be subjected to up to ten (10) hours airborne carried flight time, which may include repetitive aircraft landings, during or after which there shall be no malfunction of the Missile Guidance Set.

5.9 Free-flight tests. Prior to free-flight testing, the GTA will provide a detailed flight test plan with recommended requirements for free-flight testing of the lot sample to the procuring activity for approval, and to the cognizant design activity and the contractor for review. The recommendation for each test firing will be based specifically upon the technical need for any or all of the following:

a. Data providing a measure of Missile Guidance Set performance within the operating envelope as verified in previous flight tests.

b. Verification of the effects of design or manufacturing changes incorporated in the production lot.

c. Engineering data for validation of the non-destructive test elements employed in the test program.

The GTA shall present the conclusions derived from analysis of PVT and Fleet firings conducted on prior production missiles in the proposed flight test plan. All free-flight tests conducted as a part of PVT will use flight test conditions which are within the missile envelope. Test firings will be conducted in accordance with the recommended flight test plan unless specifically modified by direction of the procuring activity. At the direction of the procuring activity, a specific number of Missile Guidance Sets of the lot sample, which have passed the tests of Receiving Inspection (5.5), Individual Tests (5.6) and Captive-carry Tests (5.8) may be selected for, and subjected to, the free-flight test. These Missile Guidance Sets will be configured with GFE rocket motors and telemetry sets (4.9.3) for the free-flight tests. The number of Missile Guidance Sets to undergo free-flight test will be determined and justified in the flight test plan. Free-flight test results will be evaluated for compliance with performance and flight safety requirements. In the event of demonstrated Missile Guidance Set performance deficiency or safety deficiency in free-flight test, as determined by both the contractor and the GTA, the procuring activity may direct suspension of pre-acceptance tests at the contractor's plant pending formulation of a course of corrective action.

5.10 Quality conformance examination. At least one sample article will be selected for quality conformance examination from those sets which were determined to have failed (4.9.4) in prior tests, or which have successfully completed the required tests of the EFRT (5.7) or the Captive-carry Test (5.8).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

The quality conformance examination will consist of Missile Guidance Set disassembly, internal inspection for quality of workmanship at the tray level, and selected functional test of subsections in accordance with depot level maintenance procedures prescribed in applicable specification (i.e., MIL-G-85143 and MIL-G-85144). Any discrepancies observed in the Missile Guidance Set in this test will be reported by the GTA to the procuring activity, the contractor, and the cognizant design activity with recommendations for appropriate actions.

5.11 Cumulative scoring of test results. When a lot sample has completed each of the prescribed Individual and Captive-carry Tests (5.6 and 5.8) the results of these tests will be plotted on the score charts of figures 2 and 3. The number of failed Missile Guidance Sets and the number of Missile Guidance Sets tested will be added to the total Missile Guidance Sets test results of previous tests of that contractor's production. The new total obtained will be plotted as a point on the applicable score chart.

Preparing Activity:
Navy - AS
(Project No. 1425-N-102)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

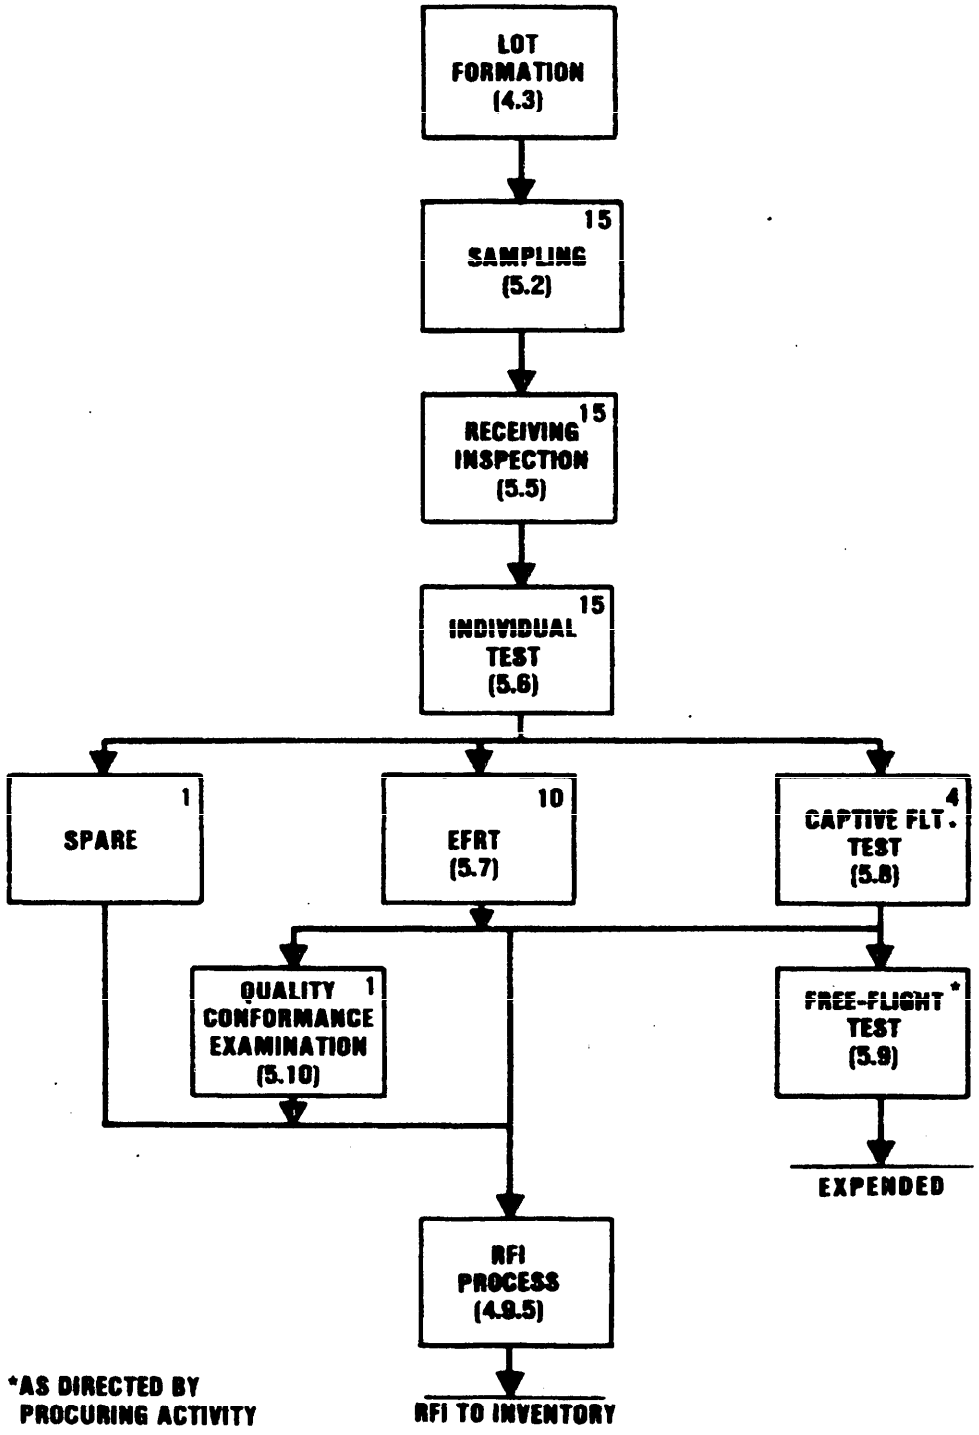


FIGURE 1. PVT TEST SEQUENCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

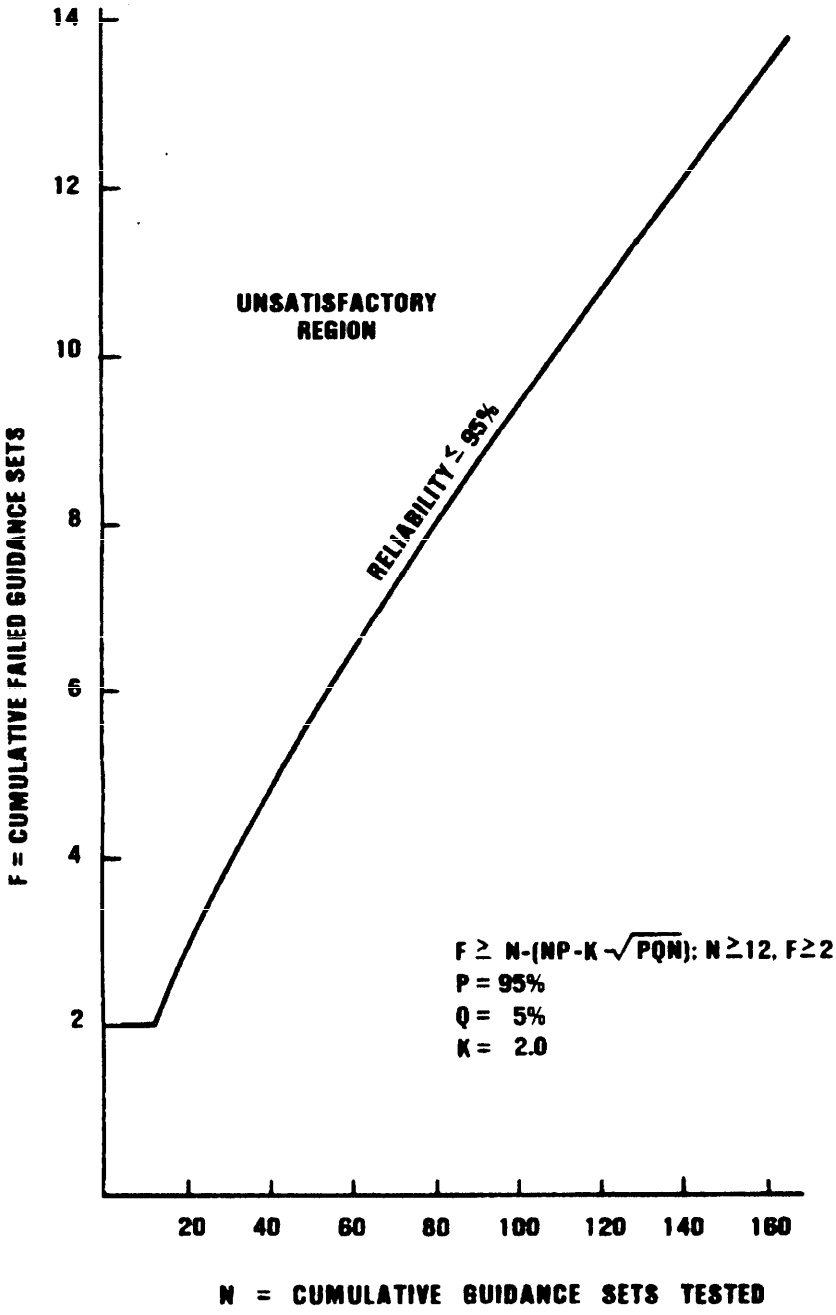


FIGURE 2. SCORE CHART FOR INDIVIDUAL TESTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

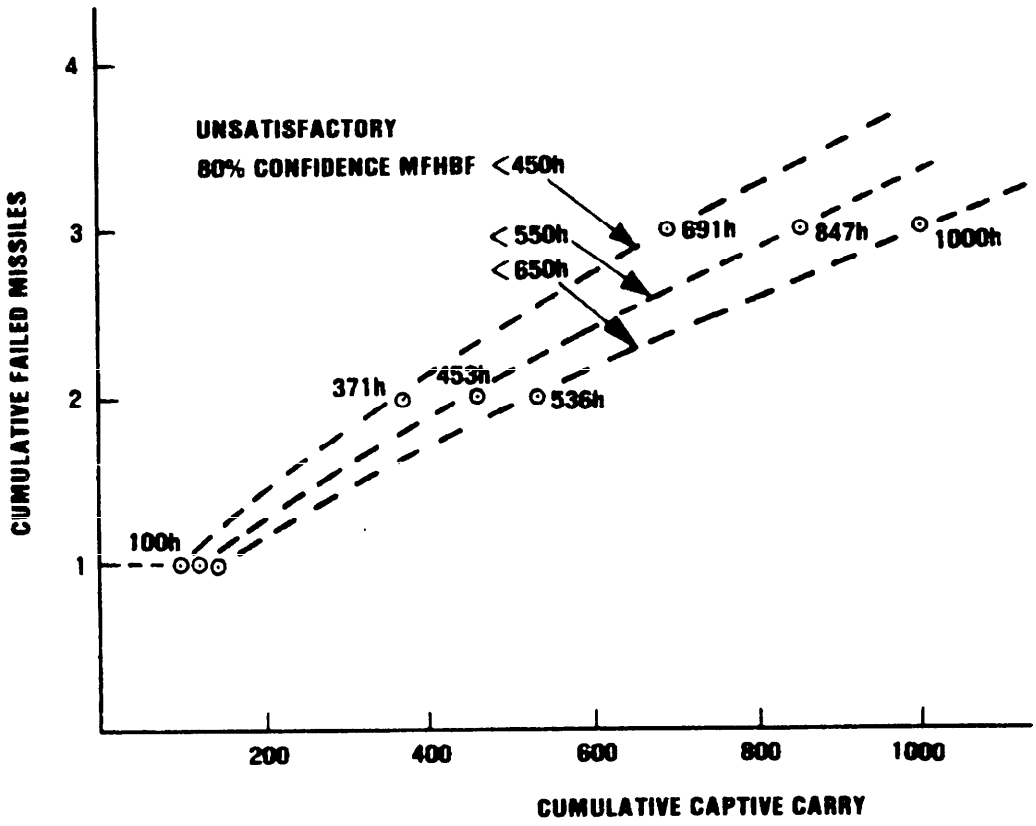


FIGURE 3. SCORE CHART FOR CAPTIVE CARRY TESTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards Department
(ESSD) Code 93
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-STD-2095(AS), MISSILE GUIDANCE SET, AIM/RIM-7M, PRODUCTION VERIFICATION TEST

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:56Z
Check the source to verify that this is the current version before use.