MIL-P-22295C(MC)
27 November 1979
SUPERSEDING
MIL-P-22295B(MC)
22 November 1972

MILITARY SPECIFICATION

PROTECTOR, TROUSERS, PISTOL HOLSTER

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type and size trouser protector.

2. APPLICABLE DOCUMENTS.

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATION

FEDERAL

V-T-276	- Thread, Cotton
UU-P-268	- Paper, Kraft, Wrapping
CCC-C-461	- Cloth, Uniform Twill, Cotton.
DDD-T-86	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached, or Dyed).

MILITARY

MIL-G-16491	- Grommet, Metallic.
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-29127	- Cloth, Twill, Polyester/Cotton (crease resistant finish)
MIL-T-43548	- Thread, Polyester, Cotton Covered

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps (LMA-1), Headquarters, U. S. Marine Corps, Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitches, Seams, and Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection By Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P. Street, N.W., Washington, D. C. 20026.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Standard sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, a first article consisting of the number of finished protectors specified by the procuring activity (see 6.2) shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all provisions of the specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Basic material. The basic material shall be cloth, uniform twill, cotton, 8.0 ounce, white shade 3006, conforming to type III of CCC-C-461. As an alternate, cloth, twill, polyester/cotton,6.8 ounce, white shade 3053 conforming to class 2 of MIL-C-29127 may be used.

3.3.2 Tape, cotton. The tape for binding the raw edges of the protector shall be cotton, bleached, 5/8 inch wide, conforming to type I of DDD-T-86.

3.3.3 Grommets. Grommets with washers shall be brass, plain type, bright finish, conforming to type I, class 1, size No. 1 of MIL-G-16491.

3.3.4 Cotton thread. The cotton thread shall conform to V-T-276, soft finish, type IA2, bleached white, ticket No. 40, 3 ply for all seaming and stitching. As an alternate, thread, polyester, cotton covered, white shade, size 70 conforming to MIL-T-43548 may be used.

3.4 Design. The design of the protector shall be as shown in Figure 1, consisting of two pieces of basic material each for body, the pistol holster side retainer and bottom support. The raw edges shall be bound with cotton tape and grommets shall be provided for attaching the protector to the pistol holster.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used as a guide for cutting the contractor's working patterns. The contractor's working patterns shall be identical to the standard patterns. These patterns are marked for placement and cutting and are notched for proper assembly of component parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

3.5.1 List of pattern parts. Protectors shall be cut from the materials specified herein in accordance with the number of pattern parts indicated below:

Item	Pattern Nomenclature	No. of Cut Parts
	Material: Cloth, uniform twill, cotton	
1.	Body protector	2
2.	Side retainer	2
3.	Bottom support	2

3.6 Construction.

3.6.1 Manufacturing requirements. Protectors shall be manufactured in accordance with the operations and the stitch, seam and stitching types specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I but all operations specified shall be used to manufacture the protector.

3.6.1.1 Stitches, seams and stitching. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.2 Shade marking. The component parts shall be marked to insure a uniform shade througout the protector. Any method of shade marking may be used except:

(a) Corrosive metal devices.
(b) Adhesive type tickets which show discoloration or leave traces of paper or adhesive mass to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD	
					NDL	BOB/ LPR
1.	Cutting.					
	a. Cut protector in strict accordance with patterns furnished by the Government.					
	b. Cut all materials in the direction indicated by directional lines on pattern. The straight of material shall indicate the warp direction.					
	c. Cut all component parts of protector from one piece of basic material.					
2.	Replacement of damaged parts.					
	a. Replace at time of cutting any part of the protector containing holes or seriously weakening defects such as smashes, multiple floats, loose or weakening slubs, etc., expected to develop into holes.					
	b. Replace any part damaged during manufacturing process by needle chews which may develop into holes, scissor or knife cuts, tears, holes, mends or burns in the material.					
3.	Shade marking.					
	a. Mark, ticket or bundle all component parts (see 3.6.2) cut from one piece of basic material.					
4.	Make side retainer and bottom support.					
	a. The side retainer and bottom support shall each be made of two pieces of basic material bound together with 5/8-inch-wide cotton tape.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD	
					NDL	BOB/ LPR
4.	Make side retainer and bottom support. (cont'd)					
	b. Position the two side retainer pieces with edges and ends even and bind the two pieces together at the top and bottom raw edges with the folded width of the tape equal on both sides of the retainer and the stitching placed over the selvage edge of the tape with a 1/8-inch throw.	304	BSa-1	8-12	40/3	40/3
	c. Position the two bottom support pieces with all edges even and bind the two pieces together at the top raw edge with the folded width of the tape equal on both sides of the support and the stitching placed over the selvage edge of the tape with 1/8-inch throw.	304	BSa-1	8-12	40/3	40/3
5.	Assemble protector.					
	a. The body of the protector shall be made of two pieces of basic material bound together with 5/8 inch wide cotton tape.					
	b. Bind the body pieces together with all edges even, starting at the top center edge and continuing around the entire protector with the side retainer positioned on the front part in accordance with the notches on the pattern and the bottom support properly positioned on the front part and each caught in the binding. The free end of the tape shall be carried to the back of the protector at approximately 45 degrees.	304	BSa-1	8-12	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
5.	Assemble protector. (cont'd)					
	c. The folded width of the tape shall be equal on both sides of the protector and the stitching shall be placed over the selvage edge of the tape with a 1/8-inch throw.					
	d. Stitch the free end with the same stitch as is used for the binding. The stitch for the free end shall be a minimum of 1 inch and shall be superimposed over the binding stitch.	304	BSa-1	8-12	40/3	40/3
6.	Set grommets.					
	a. Set the grommets and washers at the locations shown in Figure 1 with both washers placed on the underside of the protector.					
	b. The grommets and washers shall be securely clinched through all plies of the protector without cutting or otherwise damaging the cloth.					
7.	Clean protector.					
	a. Trim all ends of stitching and remove all loose ends of thread from the protector. Remove all spots, stains, and shade tickets and markings without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished protector shall conform to the measurements shown in Figure 1.

3.8 Workmanship. The finished protector shall conform to the quality and grade of product established by this specifiection. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be in accordance with the provisions set forth in MIL-STD-105.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated protector for all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be in accordance with the applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing shall be as specified in FED-STD-191, wherever applicable.

4.5.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.5.3 Examination of the end item. The end item shall be examined for defects listed in 4.5.3.1 and 4.5.3.2. The sample unit shall be one finished protector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

4.5.3.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification		
		Major	Minor	
			A	B
Fabric	Hole, cut or tear.	X		
	Other fabric defects:			
	- Seriously affecting serviceability or appearance.	X		
	- Affecting serviceability or appearance, but not seriously.			X
Tape	Not firmly and tightly woven; edges frayed or scalloped.	X		
Grommets with washers	Broken, split, or malformed; burrs or sharp edges that may cause injury in handling.	X		
	Finish partly or totally omitted; not as specified.		X	
Seams and stitching	Open seams:			
	- 1 inch or less.			X
	- more than 1 inch.	X		
	NOTE: A seam shall be considered open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur.			
	Run-offs (see open seams)			
	Any raw edge (except on end of tape)			X
	NOTE: Raw edges not securely caught in stitching shall be classified as open seam.			
	Wrong seam or stitching type.		X	
	Stitch tension loose, resulting in a loosely exposed top or bobbin thread; tight, resulting in excessive puckering of fabric on seams.		X	
	Stitches per inch:			
	- One stitch less than minimum specified.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	- Two or more stitches in excess of maximum specified.		X	
	Stitching ends backstitched less than 1/2 inch, except where held down by other stitching.			X
	Thread breaks backstitched less than 1 inch.			X
	NOTE: Thread breaks not backstitched shall be classified as an open seam.			
Components and assembly	Any required component or part of protector omitted (unless otherwise classified herein).	X		
	Any required stitching omitted.	X		
	Needle chews.	X		
Cleanness	Spots or stains clearly noticeable:			
	- Seriously affecting appearance.	X		
	- Affecting appearance, but not seriously.			X
	Thread ends not trimmed throughout.			X
Details of construction	Binding:			
	- Improperly or loosely applied.		X	
	- Overlapped ends misplaced.			X
	- Ends of binding not overlapped.	X		
	Grommets with washers:			
	- Not securely clinched.		X	
	- Clinched too tightly, cutting material.	X		
	- Improperly set, i.e., one or both washers set on front of protector instead of underside.		X	
	- Location not within specified tolerance.		X	
	- Not size No. 1.		X	
	Any part of bottom support distorted or bulged.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

4.5.3.2 Dimensional examination. The protector shall be examined for the following dimensional defects:

Examine	Defect
Overall dimensions of protector (except grommets, side retainer and bottom support).	Not within specified tolerances.
Side retainer	Width not within specified tolerances.
Bottom support	Under or over specified tolerance.

4.5.3.3 Inspection levels and AQL's. The inspection levels and AQL's expressed in defects per hundred units (DHU) shall be as follows:

Examination	Inspection level	AQL's
For defects applicalbe to 4.5.3.1	II	Major 1.5 Total 4.0
For defects applicable to 4.5.3.2	S-3	One class 6.5

4.5.4 Examination of packaging. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling. Bulged or distorted containers
Content	Number per bundle is more or less than required. Number per container is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Ten protectors shall be evenly stacked, one on the other, and bound around the center with suitable cord or cloth tape forming a secure bundle.

5.1.2 Commercial. Commercial packaging shall afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice, provided it meets the requirements specified for commercial packing.

5.2 Packing. Packing shall be level A, B and commercial as specified (See 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Two hundred (200) protectors (20 bundles of 10 each), packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to class weather resistant, grade V2s, size 1, of MIL-B-17757 and assembled, closed and reinforced as specified in the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.1.2 Method 2. When specified (see 6.2), 12 level B shipping containers (2400 protectors) shall be packed in a fiberboard shipping container conforming to class weather resistant, size No 4 of MIL-B-17757, and assembled, closed and reinforced as specified in the appendix thereto.

5.2.2 Level B. Two hundred (200) protectors (20 bundles of 10 each) packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to class domestic, grade 275, size 1, of MIL-B-17757 and assembled, closed and reinforced as specified in the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum weight kraft paper conforming to grade B of UU-P-268.

5.2.3 Commercial. Protectors, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rule or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The protectors are intended to be worn with the leather pistol holster by Military Police of the Marine Corps and are part of the Military Police Equipment set.

6.2 Ordering data. Purchasers should exercise any desire options offered herein, and procurement documents should specify the following:

6.2.1 Procurement requirements.

(a) Title, number, and date of this specification.
(b) Whether first article is required (see 3.2).
(c) Number of protector trousers in first article (see 3.2).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When level A, method 2, packing is required (see 5.2.1.2).

6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

6.3 Samples. For information regarding the availability of sample protectors, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figure 1 shows the general design and finished measurements of the protector. In the event of conflict between the figure and the text of this specification, the text of this specification shall govern.

6.6 Marginal notations. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing Activity
Navy - MC
Project No. 8465-N807

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

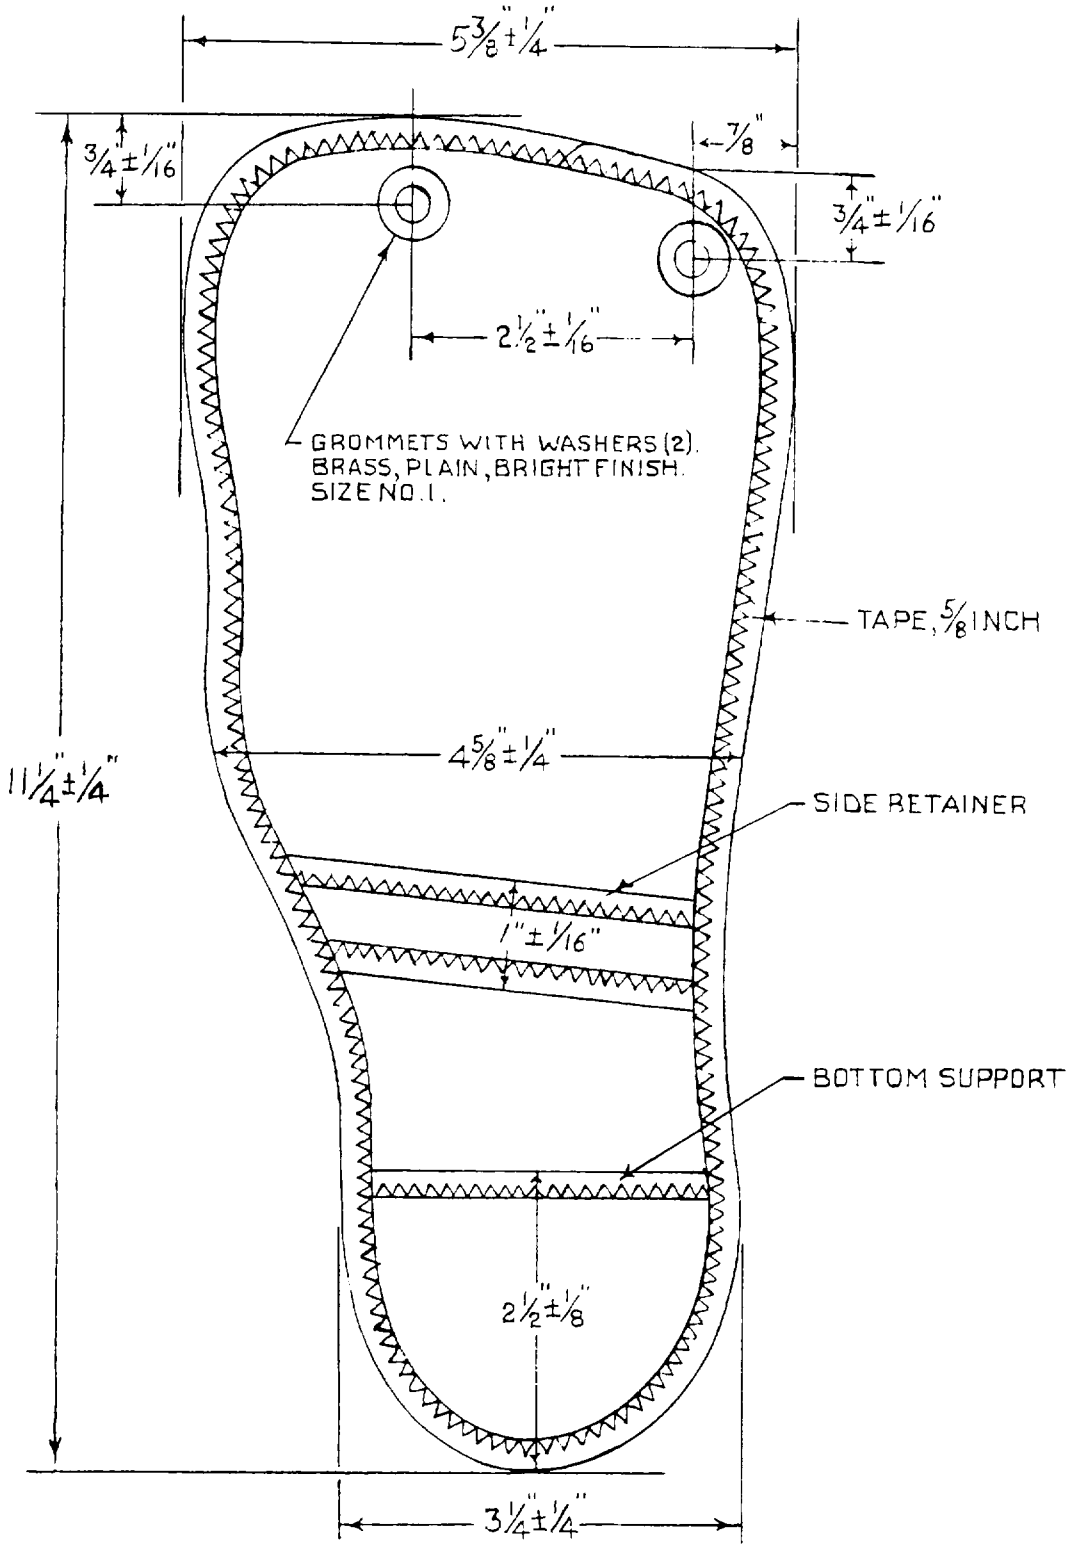


FIGURE 1. PROTECTOR, TROUSERS, PISTOL HOLSTER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

Protector, Trousers, Pistol Holster, MIL-P-22295C(MC)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-LF-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
HEADQUARTERS, U.S. MARINE CORPS
WASHINGTON, D.C. 20380

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID

Department of the Navy
DOD-317



Commandant of the Marine Corps
Headquarters, U.S. Marine Corps
(Code LMA-1)
Washington, D.C. 20380

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:49Z
Check the source to verify that this is the current version before use.