MILITARY SPECIFICATION

SHIRT, WOMAN'S: POLYESTER AND COTTON; GREEN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

*1.1 Scope. This specification covers requirements for green polyester/cotton shirts.

*1.2 Classification. The shirts shall be of one type in the following sizes as specified (see 6.2):

Schedule of Sizes

Short	Regular	Long
28	28	28
30	30	30
32	32	32
34	34	34
36	36	36
38	38	38
40	40	40
42	42	42

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic).
V-T-285	- Thread, Polyester.
DDD-L-20	- Label, For Clothing, Equipage, and Tentage, (General Use).

MILITARY

MIL-B-17757	- Box, Fiber, Corrugated (Modular Sizes).
MIL-C-43479	- Cloth, Broadcloth, Polyester and Cotton.

STANDARDS

FEDERAL

FED-STD-751	- Stitch, Seam, and Stitching.

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:53Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the sample, in which case the specification shall govern.

*3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, a first article consisting of the number of finished shirts specified by the procuring activity (see 6.2) shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

*3.3.1 Basic material. The basic material shall be broadcloth, polyester/cotton cloth, green shade 2237 (see 6.3), conforming to type I, class 2, of MIL-C-43479.

*3.3.2 Interlining. The interlining for the front, collar and collarstand shall be cut out of basic material specified in 3.3.1.

*3.3.3 Thread. The thread for seaming, stitching, buttonholes, overedge stitching and for sewing on buttons shall be polyester conforming to type I, class 1, size A, 3-ply of V-T-285. The polyester thread shall be green shade TT, Cable No. 66083. The dyed thread shall show good colorfastness to light, laundering, chlorine bleaching or combined laundering and bleaching when tested as specified in the thread specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

*3.3.4 Buttons. The buttons shall be melamine formaldehyde composition, 20 or 22 line, gray shade AR, Cable No. 62034, conforming to type II, class D, style 24 or 29 of V-B-871.

*3.3.5 Labels. Each shirt shall have a combined identification size label and a laundering instruction card. The shirt is intended to be laundered and the label shall show fastness to laundering.

*3.3.5.1 Identification size label. The combination identification size label which shall measure not less than 2-1/2 inches by 1-1/2 inches and shall conform to DDD-L-20, type I, classes 1 and 2 combined. The content and format of the label shall be as follows:

Nomenclature (item description)
Name of contractor
Contract number
Size_____Stock number_____
Fiber Products Act information

*3.3.5.2 Instruction card. The instruction card shall be a commercial type made of white cardboard. The card shall measure not less than 3-1/2 inches by 3 inches with letters not less than 1/16 inch high, except the title and the words "DO NOT USE BLEACH", which shall be in capital letters not less than 1/8 inch high. The tag shall be attached to each shirt by a string. The content and format shall be as follows:

LAUNDERING INSTRUCTIONS

Launder in warm water using a mild soap or detergent.
Scrub soiled areas.
DO NOT USE BLEACH
Rinse thoroughly in clear warm water.
Do not squeeze or wring out.
Place dripping shirt on hanger.
Press when dry or nearly dry on wrong side with steam iron at low heat.

*3.4 Design. The shirt shall be the U.S. Marine Corps design shown on Figures 1 through 3, six-button semiformfitting shirt having bust darts, front and back pleats and waist tucks, buttonhole plait, breast pocket, shirt type collar, and long sleeves with cuffs to button.

*3.5 Patterns. Standard patterns will be furnished to the supplier by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the supplier's working patterns. The standard patterns provide 1/2-inch allowance for the seam joining the yoke to the back and for the armhole, side and sleeve seams; 3/8-inch allowance for shoulder seam and 3/16-inch allowance for seam at edges of collar and all

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:53Z
Check the source to verify that this is the current version before use.

other seams. Standard patterns show size, seam allowances, directional lines for cutting, and are marked or notched for proper placement and assembly of the component parts.

*3.5.1 List of pattern parts. Shirts shall be cut from the material specified herein in accordance with the number of pattern parts indicated below:

Item	Pattern nomenclature Material: Broadcloth, polyester/cotton	No. of cut parts
1.	Front	2
2.	Back	1
3.	Sleeve	2
4.	Yoke	2
5.	Cuff	2
6.	Collar	2
7.	Collar interlining	1
8.	Collarstand	2
9.	Collarstand interlining	1
10.	Pocket	1
11.	Placket	2
12.	Placket facing	2
13.	Front interlining (buttonhole plait and buttonstand interlining).	2
	Shaper Pocket	

3.6 Construction.

*3.6.1 Manufacturing requirements. The shirts shall be manufactured in accordance with the operations and stitch, seam, and stitching types specified in Table I.

*3.6.1.1 Operations. The supplier is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the shirts.

*3.6.1.2 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more stitch or seam types are specified for the same operation, any one of them may be used. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. All overedge stitching shall be done on serging machines with a knife attachment properly set to trim the raveled edge without cutting the material.

*3.6.1.2.1 Ends of seams and stitching. Ends of seams and stitching (stitch type 301), except the ends of a continuous line of stitching, when not caught in another seam or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

*3.6.1.3 Shade marking. The component parts of the shirt, except parts cut from ends, shall be marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew on tickets.
(c) Adhesive-type tickets which show discoloration and the adhesive mass which adheres to the material upon removal of the tickets.
(d) Any marking medium which would tend to leave a permanent mark.

*3.6.1.4 Pressing. All pressing operations specified in Table I shall be accomplished with a heated pressing iron or pressing machine set at medium (low) temperature (285° F, maximum).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting. a. Cut the shirt in strict accordance with patterns furnished by the Government. b. Cut all materials in the direction indicated by directional lines on the pattern. The straight of the material shall indicate the warp direction. c. Cut the component parts for the shirt from one piece of basic material, except the following parts may be cut from ends, but when so cut, the parts shall harmonize with the shirt: undercollar, collar interlining, lining for collarstand, interlining for collarstand, front interlining, inside yoke, and binding for the raw inner edge of sleeve at cuff opening. The binding shall be cut on the straight (warp direction) 1-3/8 inches wide.					
2.	Replacement of damaged parts. a. Replace at time of cutting any parts of the shirt containing holes or serious weakening defects such as smashes, multiple floats, loose or weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc. b. Replace any parts damaged during the manufacturing process by needle chews which may develop into a hole, scissor or knife cuts, tears, holes, mends or burns in the material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
3.	Shade marking.					
	a. Mark or ticket all component parts (see 3.6.1.3) cut from one piece of basic material, except those parts cut from ends, to insure uniform shade and size throughout the shirt. Sized parts cut from ends shall be identified for size.					
4.	Make collar.					
	Finished appearance. The completed collar shall finish smooth and flat without distortion. Edges shall be uniformly even. The seams shall finish at the edges of the collar. The points and seamed edges shall be neatly and completely forced out. The points shall be uniform in length.					
	a. The collar shall be made of three plies of basic material.					
	b. Seam the three plies together 3/16 inch from top and side edges, with the interlining on top and all edges even.	301	SSe-2 (a)	12-16	A	A
	c. The interlining may be stitched to the underply of collar 1/8 inch from outer edges before joining to the top ply of collar.	301	SSa-1	12-16	A	A
	d. Trim points and turn collar on a heated collarpoint, turning and pressing machine, working out the points completely and working seam line to edge.					
	e. Edgestitch the collar 1/16 inch from the seamed edges.	301	SSe-2 (b)	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
5.	Assemble collar and collarstand. Finished appearance. Assembled collar shall consist of a collarstand and collar-leaf and shall finish smooth and flat without puckers, pleats, twists or other distortions. The collar points shall be uniform in length.					
	a. The collarstand shall be made of three plies of basic material.					
	b. Position the raw edge of collar between the top and under collarstand with interlining as indicated by notches on pattern and stitch from end to end along top edge of collar-stand, 3/16 to 1/4 inch from edge and continue stitching around the ends of the collar stand.	301	SSq-2 (a)	12-16	A	A
	or					
	c. The collarstand interlining may be stitched to the under collarstand 1/8 inch from the raw edges before joining to collar.	301	SSa-1	12-16	A	A
	d. Turn top and under collar-stand to finished position and raise stitch 1/16 inch from turned edge. The stitching shall extend the length of the collar.	301	SSq-2 (b)	12-16	A	A
6.	Make buttonhole plait. Finished appearance. The buttonhole plait shall finish smooth and flat, without pleats, puckers, or twists, and each part shall be uniform in width.					

Source: https://assist.dla.mil -- Downloaded: 20260-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
6.	Make buttonhole plait. (cont'd)					
	a. The front edge of right front shall be reinforced with the front interlining for making the buttonhole plait.					
	b. Position the front interlining on the outside of the right front with the front edge of reinforcement in line with fold notches. Stitch to the front 1/16 to 1/8 inch from front edge of interlining.	301	SSaa-1	12-16	A	A
	c. Turn the front to outside, in accordance with the notches, over front edge of the interlining and edgestitch through all plies uniformly 1/16 inch from the folded edge.	301	LSdd-2 (a)	12-16	A	A
	d. Fold the raw edge of the right front over the back edge of the interlining and edgestitch uniformly 1/16 inch from folded edge, forming the buttonhole plait. On the finished shirt, the buttonhole plait shall be 1-1/4 ±1/8 inches wide.	301	LSd-1	12-16	A	A
	or					
	e. The buttonhole plait may be made on a double needle sewing machine equipped with a 1-1/4 inch wide folder attachment designed for folding, turning under the raw edge, and stitching 1/16 inch from folded edge.	301	EFq-2 (inverted)	12-16	A	A
7.	Make buttonstand; sew on label.					
	Finished appearance. The buttonstand shall finish smooth and flat, without pleats, puckers, distortions or twists, and each part shall be uniform in width.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
7.	Make buttonstand; sew on label. (cont'd)					
	a. The front edge of left front shall be reinforced with the front interling for making the buttonstand.					
	b. Position the front interlining for the buttonstand on the outside of the left front, with front edge of front and one edge of interlining even. Seam the interlining and front together 3/16 inch from front edges.	301	LSq-2 (a)	12-16	A	A
	c. Turn the seam and raise stitch the front uniformly 1/16 inch from the joining seam.	301	LSq-2 (b)	12-16	A	A
	or					
	d. When front edge of front is selvaged, the front and interlining shall be joined together with a 3/8-inch lap seam, with the stitching centered and the front edge of front on top.	301	LSa-1	12-16	A	A
	or					
	e. Fold under front edge 3/16 inch, lap over one edge of interlining 3/16 inch and stitch 7/16 inch from folded edge. The interlining may be joined with a folder attachment designed to produce the appropriate seam type.	301	LSb-1	12-16	A	A
	f. Turn interlining to inside along raw edge of seam allowance joining interlining to front, and with back edge of interlining in line with the	301	LSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
7.	Make buttonstand; sew on label. (cont'd)					
	notches for front edge of shirt. Stitch back edge of interlining to front 1/8 inch from raw edge of interlining. In the finished shirt, the stitching shall not show on the outside of front.					
	g. Turn front to inside at notches and stitch top and bottom of buttonstand to the body of the front 1/16 inch from the edges.	301	SSa-1	12-16	A	A
	h. Position the identification label between the front and buttonstand with the inner folded edge of the stand lapped 1/4 inch on the top edge of the label, and with the lower end of the label approximately 1 inch above the bottom edge of the shirt. Stitch the label to the buttonstand 1/16 inch from the inner folded edge of the stand.	301	LSa-1	12-16	A	A
8.	Make tucks and pleats in fronts.					
	a. Fold and stitch the tuck on inside of fronts as indicated by marks on pattern (see Figure 1).	301	OSf-1	12-16	A	A
	b. The stitching shall be across the width of the tuck at each end and shall extend for a distance of 3/8 to 1/2 inch from the fold and shall be 2-3/4 ±1/4 inches in length. Tucks shall not be stitched to the body of the shirt.					
	c. Press the tucks smooth and flat with a heated pressing iron or pressing machine, from the stitched top end of tuck to bottom edge of shirt, forming					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
8.	Make tucks and pleats in fronts (cont'd)					
	a pleat below the tuck and with the folded edge of the tuck and inside folded edge of pleat turned toward the front edge of the shirt.					
9.	Make darts.					
	Finished appearance. The dart shall be properly positioned and finished without pleats, puckers, or gathers.					
	a. Fold and stitch bust darts in fronts, as indicated by marks on the patterns. The darts shall be neatly formed and tapered to a flat point. The point shall be securely tacked or backstitched.	301	OSf-1	12-16	A	A
10.	Make tucks and pleats in back part.					
	a. Fold, stitch and press tucks and form pleats in back in the same manner as specified for fronts, except when pressing the tucks and pleats, the folded edge shall be towards the center back.	301	OSf-1	12-16	A	A
11.	Join yoke to back.					
	Finished appearance. The yokes shall be seamed to the back smoothly and flatly, without twists, pleats, raw edges, puckers or distortion and shall be uniform in appearance and placement.					
	a. The yoke shall be two ply.					
	b. Position back between the two yoke pieces, with top edge of back and lower edge of yoke pieces even and with notches	301	LSbp-2 (b)	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
11.	Join yoke to back. (cont'd)					
	matching. Seam the three pieces together 1/2 inch from the edge.					
	c. Turn back the outside yoke and raise stitch the yoke 1/16 inch from joining seam.	301	LSbp-2 (b)	12-16	A	A
12.	Join yoke to fronts at shoulders.					
	a. Shirr the shoulder edge of fronts between the notches as indicated by pattern.	301	OSa-1		A	A
	b. Join the inside yoke to fronts at shoulders with a 3/8-inch seam, matching notches.	301	LScf-2 (a)	12-16	A	A
	c. Stitch the outside yoke to the fronts at the shoulder with the shoulder edge of the yoke turned under 3/8 inch and caught in the stitching 1/16 inch from the folded edge. On the finished shirt, the yoke shall be lapped on the outside of the front with the folded edge toward the front.	301	LScf-2 (b)	12-16	A	A
13.	Set collar with size label.					
	Finished appearance. The collar shall be uniform in appearance and placement, and shall be carefully joined to the shirt without distortion.					
	a. Position collar-collar-stand assembly on the outside of shirt with notch in the neck edge of the collarstand and neck edge of back matching, and with ends of collarstand even with front edges of shirt.					
	b. Join the undercollar and interlining collarstand from end to end to the shirt with a 3/16-inch seam.	301	SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
13.	Set collar with size label. (cont'd)					
	c. Turn under the lower edge of the top collarstand; lap the folded edge on the inside of the shirt turning the seam allowance toward collarstand and raise stitch the collarstand, starting at the top edge not less than 3/8 inch, to the back of lower corners of collar and continuing around the ends and along the bottom edge 1/16 inch from the edges.	301	SSe-2 (ends) (shows finished seam) LSb-1 (topcollar stand)	12-16	A	A
	d. On the finished shirt, the collarstand shall be 1 to 1-1/8 inches wide, and the collar shall be 1-5/8 ±1/8 inches wide at the center back. The ends of the collar shall be 3-1/8 ±1/8 inches long, when measured from juncture point of collar and collarstand to finished edge of collar.					
14.	Bind cuff opening.					
	a. Bind the raw back edge of the sleeve at the cuff opening with a 1-1/2-inch-wide strip of basic material, with the raw edges of the binding turned under and caught in the stitching 1/16 inch from the inner folded edges. The binding shall finish 3/8 to 1/2 inch wide on inside and outside of the sleeve.	301	BSc-1	10-14	A	A
15.	Make placket.					
	Finished appearance. The sleeve placket shall finish smooth and flat without distortion, twists, pleats or puckers, and shall be uniform in length and width.					

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
15.	Make placket. (cont'd)					
	a. Position the placket piece on the inside of the sleeve at the front edge of the sleeve opening with edges even and seam 1/4 inch from the edge. Stitching shall extend from bottom end of sleeve to top of opening.	301	SSa-1	12-16	A	A
	b. Turn placket and raise-stitch 1/16 inch from turned edge. Stitching shall extend from bottom end of placket to top end of sleeve opening.	301	LSq-2 (b)	12-16	A	A
	c. Turn placket to outside, properly folding, and edgestitch placket 1/16 inch from folded edge. Stitching shall extend from bottom end of placket to top end of cuff opening.	301	OSf-1	12-16	A	A
	d. Backtack the placket, the binding, and tongue notch together at top end of sleeve opening; with the top of the binding and face side of placket against the underside of the sleeve.	301	SSa-1	12-16	A	A
	e. Turn under the top and front raw edges of the placket forming a point at the top end (see Figure 1) and stitch the placket to the body of the sleeve 1/16 inch from top, back and front folded edges, lapping the placket on the bound edge of cuff opening,	301	LSd-1	12-16	A	A
	f. Stitch and backstitch across the top end of the opening 1-1/4 ±1/8 inches below the point. The stitching shall extend to, but shall not cross, the two rows of stitching for the placket and shall be through the placket and bound edge of cuff opening.	301	SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
15.	Make placket. (cont'd) -					
	g. On the finished shirt, the placket shall be 3-3/4 ±1/8 inches in length when measured from the point to the top edge of the cuff and 1-1/8 ±1/8 inches in width.					
16.	Set sleeves.					
	Finished appearance. The sleeves shall be set without distortion.					
	a. Join sleeves to shirt around the entire armhole with a 1/2-inch seam, matching the notches.	301	SSa-1	12-16	A	A
17.	Overedge stitch sleeve and armhole.					
	a. Overedge stitch the raw edges of the sleeve and armhole together.	504	FFd-1	10-14	A	A
	or					
	b. The sleeves may be joined to the shirt by seaming and overedge stitching the raw edges together in one operation.	517	SSa-2	12-16	A	A
18.	Close sleeves and sides.					
	a. Join fronts and back at the sides and close the sleeve underarm with a 1/2-inch seam, turning the folded edge of the bust darts toward the bottom of the shirt and the armhole seam flat against the sleeve, and catching the back end of the darts and ends of the armhole in the stitching.	301	SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
19.	Overedge stitch seams and bottom edge.					
	Finished appearance. The overedge stitching shall be securely caught in the fabric. The raw edges of the overedge stitched material shall be properly trimmed.					
	a. Overedge stitch the raw edges of the sleeves and side seam allowances, and bottom edge of shirt with the side seams turned toward the back and catching the back end of the bust darts and ends of the armhole seam in the stitching at the sides, and the bottom end of buttonhole plait, buttonstand and side seams in the stitching at the bottom edge.	504	EFd-1	10-14	A	A
	or					
	b. The raw edges of the sleeve and side seam allowances may be joined by seaming and overedge stitching in one operation.	517	SSa-2	12-16	A	A
20.	Make cuffs.					
	Finished appearance. The cuffs shall finish smooth and flat without distortion and shall be uniform in shape and size. The edgestitching shall be of uniform gage. The cuffs shall have rounded lower corners. The buttonholes shall be clean cut, well made and correctly positioned, and the stitching shall be securely caught in the fabric with the purling on the outside.					
	a. The cuffs shall be made of a single ply of basic material folded in half to form two plies.					

Source: https://assist.dla.mil -- Downloaded: 20261O-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
20.	Make cuffs. (cont'd)					
	b. Fold the cuff piece in half lengthwise and close the ends with a 3/16-inch seam; continue the stitching around lower corners tapering to zero at the folded edge, approximately 3/4 inch from the ends.	301	SSa-1	12-16	A	A
	c. Turn cuff, working out the seamed edges and rounded corners completely.					
21.	Join cuffs to sleeves.					
	Finished appearance. The finished cuffs shall be uniform in width without raw edges or distortion and the fullness in the sleeves shall be properly distributed, as indicated by pleats.					
	a. Position the underply of the cuffs on the lower inside end of the sleeve with edges even; fold the end of the sleeves in accordance with notches, forming two top arm pleats and one underarm pleat and join sleeve and cuff together with a 1/4-inch seam, turning the sleeve closing seam towards the back and catching the ends of the pleats and sleeve seam in the seam.	301	LScf-2 (a)	12-16	A	A
	b. Turn under the raw edge of the top ply of the cuffs 1/4 inch; lap the folded edge on the outside of the sleeve and edgestitch cuff 1/16 inch from upper folded edge; continue stitching along ends and bottom edge. Stitching at top of cuff shall not be through the underply of cuff.	301	LScf-2 (b) (top edge) SSe-2 (b) (ends) OSf-1 (bottom edge)	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
21.	Join cuffs to sleeves. (cont'd)					
	c. On the finished shirt, the outside folded edge of the sleeve pleats shall be turned towards the cuff opening and the cuffs shall be 2-1/4 ±1/8 inches in height.					
22.	Make pocket.					
	Finished appearance. The hem of the pocket shall be uniformly stitched and shall finish smooth and flat without distortion.					
	a. Hem the top of the pocket in accordance with the notches, with the raw edge turned under not less than 3/8 inch and caught in the stitching 1/16 inch from the finished bottom edge of hem.	301	EFb-1	12-16	A	A
	b. On the finished shirt, the hem shall be 3/4 ±1/8 inch wide.					
23.	Set pocket to front.					
	Finished appearance. The pocket shall be set without distortion or raw edges. The seaming of the pockets shall be of uniform gage. The front edge of the pocket shall be in parallel alignment with front edge of shirt when buttoned.					
	a. Mark the left front in accordance with pattern for positioning the breast pocket.					
	b. Position pocket at marks on left front; turn under side and bottom edges in accordance with shape of pattern and stitch pocket to front with a double row of stitches 3/32-inch gauge, with the outer row 1/16 inch from side and bottom edges. The stitching shall follow the shape of the pocket.	301	LSd-2	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 20260-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
23.	Set pocket to front. (cont'd) c. On the finished shirt, the pocket shall be 4-1/4 ±1/4 inches in width, and 4-1/4 ±1/4 inches in height when measured along the vertical center from top to point at bottom edge.					
24.	Make buttonholes. Finished appearance. The buttonholes shall be clean cut, well made and correctly positioned. The stitching shall be securely caught in the fabric. The buttonholes shall be in vertical alignment with each other. a. Mark the right end of the collarstand for the location of one buttonhole. The center of the buttonhole shall be in line with the center of the buttonhole plait. b. Mark the buttonhole plait in accordance with marks indicated on pattern for the location of five equally spaced buttonholes. The center of the top buttonhole shall be three inches below the buttonhole for the collarstand. c. Mark the front end of each cuff for the location of one buttonhole. The buttonhole shall be midway between top and bottom edges of cuff with the back end of the buttonhole 3/8 inch from the end of the cuff. d. Make a 5/8-inch-long horizontal straight type buttonhole, tacked at each end, at the mark on the collarstand.	Buttonhole		55 per buttonhole including tacks at each end.	A	A

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
24.	Make buttonholes. (cont'd)					
	e. Make a 5/8-inch-long horizontal straight type buttonhole, tacked at each end, at each mark on the buttonhole plait.	Button-hole		55 per buttonhole including tacks at each end	A	A
	f. Make a 5/8-inch-long horizontal straight type buttonhole, tacked at each end, at the mark on each cuff.	Button-hole		55 per button-hole including tacks at each end	A	A
	g. The buttonholes shall be made to fit 20 or 22 line sewing hole buttons. The purling of the buttonholes shall be on the outside of the shirt.					
25.	Sew on buttons.					
	Finished appearance. The buttons shall be securely sewn to the shirt with the ends of the stitching securely tacked. The buttons shall be properly aligned with the buttonholes to secure a smooth and complete closure without bulging or misalignment.					
	a. Sew five buttons to the left front through the buttonstand, with the center of the buttons 5/8 inch from front edge of shirt. Sew one button to the left end of the collarstand with the center of the button aligned with center of front buttons. Buttons shall properly engage buttonholes on right front.	101		22 per button		

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:53Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
25.	Sew on buttons. (cont'd)					
	b. Sew one button to the back end of the cuff to properly engage buttonhole in front end. The center of the cuff button shall be 3/8 inch from back end of cuff.	101		22 per button	A	
26.	Cleaning.					
	a. All ends of stitching shall be trimmed, and the loose ends removed from the shirt.					
	b. All spots, stains, and shade tickets or markings shall be removed without injury to the material.					
27.	Pressing.					
	Finished appearance. Pressing shall be done on a heated pressing iron or pressing machine (see 3.6.1.4) of a type suitable to obtain the desired appearance in accordance with good manufacturing practice.					
	a. Press buttonhole plait and buttonstand smooth and flat.					
	b. Press collar smooth and flat.					
	c. Press the entire shirt, sleeves, fronts, pocket and back, removing all wrinkles,					
	d. Button and finish pressing the shirt.					

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:53Z
Check the source to verify that this is the current version before use.

*3.7 Finished measurements. The finished shirt shall conform to the measurements shown in Table II. Shirt shall be measured buttoned and lying smooth and flat.

Table II. - Finished measurements

Size	Back Length 1/	Bust 2/	Waist 3/	Sleeve lengths 4/			Collar length 5/
				Short	Regular	Long	
	inches	inches	inches	inches	inches	inches	inches
28	24-3/4	37-1/4	29-1/2	27-1/2	28-1/2	29-1/2	13
30	25	38-3/4	31	27-3/4	28-3/4	29-3/4	13-1/4
32	25-1/4	40-1/4	32-1/2	28	29	30	13-1/4
34	25-1/2	41-3/4	34	28-1/4	29-1/4	30-1/4	13-1/2
36	25-3/4	43-1/4	35-1/2	28-1/2	29-1/2	30-1/2	14
38	26	44-3/4	37	28-3/4	29-3/4	30-3/4	14-1/2
40	26-1/4	46-1/4	38-1/2	29	30	31	14-3/4
42	26-1/2	47-3/4	40	29-1/4	30-1/4	31-1/4	15-1/4
Tolerance	± 1/2	± 3/4	± 3/4	± 3/8	± 3/8	± 3/8	+ 1/4 − 1/8

1/ Back length measurement taken along center back from lower edge of collarstand to the bottom edge of shirt.

2/ Bust measurement taken across front from folded edge to folded edge in line with pit of armhole. Multiply measurement by two.

3/ Waist measurement taken from side seam to side seam, across stitched top end of pleats. Multiply measurement by two.

4/ Sleeve length measurement taken along shoulder from lower edge of undercollar at side of neck to armhole-sleeve seam and along center of sleeve to bottom edge of cuff.

5/ Collar length measurement taken along outside center of collarstand from center of buttonhole to center of button.

*3.8 Workmanship. The finished shirt shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

*4.1.1 Certificate of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such items to determine the validity of the certification.

*4.2 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

*4.2.1 First article inspection. When first article is required, inspection shall be made of a completely fabricated shirt for conformance to all provisions of this specification.

*4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

*4.2.2.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

*4.2.3 Examination of end item. The end item shall be examined for defects listed in 4.2.3.1 through 4.2.3.4. The sample unit shall be one shirt.

*4.2.3.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Minor A	Minor B
Material defects and damages	a. Any hole or weakening defect, such as a smash, multiple float, loose slub, etc. that may develop into a hole.	X		
	b. Scissors or knife cut, tear, mend or burn, or needle chew which may develop into a hole.	X		
	c. Shade bar, unsightly slub, dye or finishing streak or any other material defects:			
	- seriously affecting appearance.	X		
	- not seriously affecting appearance.		X	
	d. Ruptured fibers in the line of sewing (usually caused by broken, blunt or hooked needle), affecting appearance.		X	

NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Weakening or nonweakening conditions which are inconspicuous and have negligible effect on serviceability are to be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	Material defect - No defect Workmanship damages - Minor B defect			
Shaded parts	a. Any outside part except undercollar.		X	
	b. Undercollar or inside parts cut from ends badly shaded.			X
Cleanness	a. Removable spot or stain, clearly noticeable.			X
	b. Spot or stain of an obviously permanent nature, affecting appearance.	X		
	c. Thread ends not trimmed, loose thread ends or one or more shade tickets (if used) not removed throughout shirt.			X
Components and assembly	Any omitted or defective component, or any omitted operation or defect of assembly (unless otherwise classified herein).	X		
Cutting	Any part not cut in accordance with directional lines on patterns or specification requirements.	X		
Seams and stitching	a. Accuracy of seaming:			
	1. Any part of shirt caught in an unrelated operation or stitching.		X	
	2. Seam twisted, puckered or pleated, affecting appearance (unless otherwise classified herein).	X		
	3. Thread break or end(s) of all stitchings not backstitched when not caught in other seams or stitching.			X
	4. Shade(s) of thread used on outside not satisfactorily matching shade of shirt.		X	
	b. Gage of stitching (on edge, top or raise-stitching, or turned under edges:			
	1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged, affecting appearance.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	2. Not within the range of gage specified, or varying more than 1/16 inch when no range is specified.			X
	3. Edge, raise or top stitching too close to edge, resulting in damage to fabric.	X		
	c. Open seams:			
	1. On joining seams:			
	- over 1/8 inch, to and including 1/4 inch.			X
	- over 1/4 inch, to and including 1 inch.		X	
	- over 1 inch.	X		
	2. On hems over 1/4 inch.			X

NOTE: A break in a line of stitching or continuous skipped or run-off stitches constitute an open seam.

	d. Raw edges (applicable to edges required to be turned under or overedge stitched):			
	1. On outside (except overedge stitched edges):			
	- over 1/8 inch, to and including 1/4 inch.			X
	- over 1/4 inch, to and including 3/4 inch.		X	
	- over 3/4 inch.	X		
	2. On inside (except overedge stitched edges):			
	- over 1/2 inch, to and including 2 inches.			X
	- over 2 inches.	X		
	3. On overedge stitched edges:			
	- over 1 inch, to and including 3 inches.			X
	- over 3 inches.	X		

NOTE: A raw edge along an edge required to be turned under is classified as such when edge is securely caught in the stitching. If the edge is not securely caught in the stitching, score the condition as an open seam.

	e. Run-offs:			
	1. On joining seams, when resulting in an open seam, score as "open seam".			
	2. On edge, top or raise stitching when not resulting in an open seam (outside only):			
	- over 1/2 inch, to and including 1 inch.			X
	- over 1 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	f. Not specified seam or stitch type.		X	
	g. Stitch tension:			
	1. Loose tension, resulting in a loose seam.	X		
	2. Loose tension on raised or edge stitching, i.e., loosely exposed loops of lower or top thread.		X	
	3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X		
	NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in lengthwise direction of seam.			
	h. Stitches per inch (to be scored only when the condition exists on major portion of seam):			
	1. Less than minimum specified:			
	(a) All seams except stitching of labels and seams that are later raise, edge or top stitched:			
	- 1 stitch.			X
	- 2 stitches.		X	
	- 3 stitches.	X		
	(b) All above excepted seams except overedge stitching - two or more stitches.			X
	(c) Overedge stitching - three or more stitches.			X
	2. Any number of stitches in excess of maximum specified.			X
	i. Stitches skipped or broken on edge or raised stitching (when seam is seamed, turned and stitched):			
	1. 1/4 inch or more but not more than 1/2 inch.			
	2. Over 1/2 inch.		X	
Buttonholes (construction)	a. Stitching not securely caught in fabric, causing stitching to pull away from fabric.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	b. More than two stitches skipped in one or more buttonholes.		X	
	c. One or more broken stitches in:			
	- one buttonhole.		X	
	- two or more buttonholes.	X		
	d. Tack (bar) on one or both ends omitted or insecure on:			
	- one buttonhole.			X
	- two buttonholes.		X	
	e. Very ragged edge on buttonhole(s), incomplete stitching or uncut.		X	
	f. Not specified type buttonhole or purling not on outside.		X	
	g. Poorly constructed unless otherwise classified herein.		X	
	h. Buttonhole(s) not corresponding to size of button(s) so they do not button properly.		X	
Buttons	a. One or more missing, loose, insecurely sewn, broken or defective.			X
	b. Not specified size, type or color.		X	
Pressing	a. Burned or scorched.	X		
	b. Omitted.		X	

*4.2.3.2 Detailed defects (outside of shirt). Detailed defects on outside of shirt shall be classified as follows:

Examine	Defect	Classification Major	Minor A	Minor B
Collar and collarstand	a. Topcollar twisted or tight, causing edges to curl up, seriously affecting appearance.	X		
	b. Collar edges crooked, affecting appearance.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	c. Collar edges not properly forced out, i.e., having folds 1/16 inch or more deep, or undercollar exposed along edge more than 1 inch.			X
	d. Collar ends poorly shaped, or not uniform in width, length or shape.		X	
	e. Width of collar at center back less than 1-1/2 inches or more than 1-3/4 inches.			X
	f. Ends of collar less than 3 inches or more than 3-1/4 inches in length.			X
	g. Width of collarstand at center back less than 1 inch or more than 1-1/8 inches.			X
	h. Collarstand or body of shirt puckered or pleated in collarstand joining seams to collar or body of shirt.			X
	i. Collar puckered or pleated in collarstand joining seam to collar.			X
	j. Stitching of collarstand lining and interlining joining seam exposed below bottom edge of collarstand.			X
	k. Collar or collarstand not centered by more than 3/8 inch or collar ends unevenly spaced from ends of collarstand by more than 1/4 inch.	X		
	l. End(s) of collarstand protruding beyond front edge(s) of shirt more than 1/8 inch or ends of collarstand poorly or not uniformly shaped.			X
	m. Ends of collar or shirt front corners not securely caught in joining seam(s) to collarstand.	X		
Collarstand button and buttonhole	a. Buttonhole more than 1/8 inch off center of collarstand.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	b. Center of buttonhole out of alignment with center of buttonhole plait by over 1/4 inch.		X	
	c. Button and buttonhole out of alignment, causing fronts to be uneven at bottom of collarstand by over 1/4 inch when buttoned.		X	
	d. Center of button not aligned with center of buttons on left front by over 1/4 inch.			X
Front closure	a. Buttonhole plait on right front:			
	1. Tight, twisted or puckered.	X		
	2. Under 1-3/16 inches or over 1-5/16 inches in width.			X
	3. Uneven in width by over 1/8 inch.			X
	b. Front puckered, pleated, or twisted in stitching of plait to front.			X
	c. Buttons and buttonholes out of alignment, causing a noticeable bulge on fronts when buttoned, affecting appearance.	X		
	d. Length of fronts when buttoned uneven at bottom by 1/2 inch or more.			X
	e. Buttonholes in right front plait:			
	1. Center of top buttonhole in right front under 2-3/4 inches or over 3-1/4 inches below center of collarstand buttonhole.			X
	2. Unequally spaced or out of vertical alignment by 1/4 inch or over.		X	
	3. Constructed horizontally.		X	
	4. Off center of plait by over 1/8 inch.		X	
	f. Center of buttons in left front under 1/2 inch or over 3/4 inch from edge or out of vertical alignment by over 1/4 inch.		X	
	g. Length of unbuttoned fronts uneven by more than 1/2 inch.			X

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Yoke joining seams to fronts	a. Large plaits in shirred portion or fullness in the shirring not distributed uniformly on both fronts, affecting appearance.		X	
	b. Stitching of inside yoke joining seam exposed beyond edge of outside yoke.			X
Breast pocket	a. Width of hem under 5/8 inch or over 7/8 inch.			X
	b. Hem twisted or puckered, affecting appearance.		X	
	c. Single stitched to left front.		X	
	d. Excessive fullness or tightness at pocket opening.		X	
	e. Poorly shaped or set on crookedly, seriously affecting appearance.	X		
	f. Under 4 inches or over 4-1/2 inches in overall width or in overall height when measured along the vertical center from top to point at bottom edge.			X
Underarm darts	a. Not turned toward bottom of shirt.			X
	b. Uneven in length by more than 1/2 inch.			X
	c. Not uniformly positioned, affecting appearance.		X	
	d. End(s) not tapered, resulting in unsightly bulge(s).		X	
Front and back tuck and pleats	a. Tucks not uniformly positioned from side seams, affecting appearance.		X	
	b. Tops of tucks uneven in length by over 1/2 inch.			X
	c. Tucks not turned away from side seams.			X

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	d. Pleat(s) below bottom of tuck(s) not pressed in, not extending to bottom of shirt or outside fold of pleat not facing side seam.			X
Armhole and sleeve	a. Excessive fullness or fullness misplaced, resulting in puckers or pleats in sleeve head.	X		
	b. Sleeve tight, causing fullness or pleats on fronts, back or yoke.	X		
	c. Armhole irregular, i.e., crooked, affecting appearance.		X	
	d. Ends of armhole seam staggered more than 1/4 inch at side seam.			X
Placket opening in sleeve	a. Sleeve puckered or pleated at joining seam of placket or binding.		X	
	b. Placket:			
	1. Twisted or puckered, affecting appearance.	X		
	2. Uneven in width or right and left plackets varying over 1/8 inch in width.			X
	3. Pointed end poorly shaped or not uniformly shaped on both sleeves, affecting appearance.	X		
	4. Under 1 inch or over 1-1/4 inches in width.			X
	5. Under 3-5/8 inches or over 3-7/8 inches in length from point to top of cuff.			X
	6. Ends of stitching at top of opening unevenly spaced from base of point by over 1/8 inch, stitching crooked, or extending beyond edge(s) of placket over 1/8 inch.			X
	c. Top end of opening under 1-1/8 inches or over 1-3/8 inches below the point.			X
	d. Opening uneven in length by 3/8 inch or more to top edge of cuff.		X	
	e. Binding on back of opening under 3/8 inch or over 1/2 inch on inside or outside, or badly puckered or twisted.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Cuffs and cuff joining seams	a. Cuff full or twisted, affecting appearance.	X		
	b. Cuff ends crooked or end(s) of cuff poorly or not uniformly shaped, affecting appearance.		X	
	c. Cuff irregular in width or cuffs not uniform in width by 1/4 inch or more.			X
	d. Ends of cuff extending beyond edge of sleeve opening by more than 1/8 inch.			X
	e. Height of cuffs under 2-1/8 inches or over 2-3/8 inches.			X
	f. Cuff button out of alignment with buttonhole, causing a noticeable bulge or twist on sleeve opening or causing top edge of cuff to be uneven by more than 1/4 inch.		X	
	g. Buttonhole:			
	1. Over 1/8 inch off center of cuff.			X
	2. End under 1/4 inch or over 1/2 inch from front end of cuff.			X
	h. Center of cuff button under 1/4 inch or over 1/2 inch from end of cuff.			X
	i. Underply of cuff full or twisted not effecting smoothness on outside cuff.			X
	j. Outside fold(s) of one or both top arm pleat(s) or underarm pleat not facing end(s) of cuff.			X
	k. Stitching of underply of cuff joining seam exposed above top edge of cuff.			X
Yoke joining seam to back	a. Yoke or shirt back puckered or pleated at joining seam.			X
	b. Raise stitching not on yoke.		X	

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:53Z
Check the source to verify that this is the current version before use.

*4.2.3.3 Detailed defects (inside of shirt). Detailed defects on inside of shirt shall be classified as follows:

Examine	Defect	Classification Major A	Classification Minor B
Buttonstand on left front	a. Buttonstand uneven in width by over 1/4 inch.		X
	b. Raise stitching of reinforcement joining seam not on front, or selvage front edge of front not lapped over edge of reinforcement.	X	
	c. Button sewing stitches on one or more buttons not through buttonstand.	X	
	d. Reinforcement exposed on inside of shirt.	X	
	e. Top or bottom end(s) of buttonstand not securely caught in collarstand joining seam or overedge stitching at bottom of shirt, respectively.	X	
	f. Identification label:		
	1. Not stitched to inner folded edge of buttonstand or end of label less than 1/2 inch or more than 1-1/2 inches from bottom edge of shirt.		X
	2. Inner folded edge of buttonstand not lapped over top edge of label.		X
Yoke joining seam to back	Raise stitching at bottom exposed through inside yoke.		X
Armhole seam	Not turned into sleeve, including end(s) at side seam(s).		X
Side seams	Not turned against back including seam ends at cuff and bottom of shirt.		X
Front and back tucks	a. Not stitched across top or bottom end.		X
	b. Less than 2-1/2 inches or more than 3 inches long.		X
	c. Less than 3/8 inch or more than 1/2 inch in width.		X

*4.2.3.4 Finished measurements. Any measurement deviating from the nominal dimensions and tolerance specified in Table II shall be classified as a size measurement defect. Sleeve lengths uneven by 1/2 inch or more shall be classified as a size measurement defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

*4.2.3.5 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.2.3.1 through 4.2.3.3

Inspection Level III of MIL-STD-105

AQL's	Major	1.5 DHU
	Major and Minor A (combined)	10.0 DHU
	Total Major, Minor A and Minor B (combined)	15.0 DHU

4.2.3.4

Inspection Level S-3 of MIL-STD-105

One class	4.0 DHU

*4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packed, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lot shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of shirts per shipping container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

*5.1.1 Level A. Each shirt shall be fully buttoned and neatly folded. The folded shirt shall measure approximately 12 inches in length and 10 inches in width. Each shirt so folded shall be inserted in an individual polyethylene bag measuring approximately 15 inches in length and 12 inches in width. The bag shall be fabricated from 0.0015-inch thick film. Prior to, or during, the final sealing operation, excess air shall be expelled to the extent necessary to insure the required multiples of packaged units will fit into the shipping container specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

*5.1.2 Level C. Shirts shall be packaged in accordance with manufacturer's commercial practices.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

*5.2.1.1 Method 1. Twenty-five (25) shirts, of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container with liner conforming to class weather resistant, grade V2s, size 1A of MIL-B-17757 and each shipping container shall be assembled, closed, and reinforced as specified in the appendix thereto. The fiberboard used for fabricating the liner shall be grade V3c. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.2.1.2 Method 2. When specified (see 6.2), 12 level B shipping containers (300 shirts of one size only), shall be packed in a fiberboard shipping container conforming to class weather resistant, size No. 4 of MIL-B-17757 and assembled, closed, and reinforced as specified in the appendix thereto. Towards the end of the contract, or when there is less than the amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.2.2 Level B. Twenty-five (25) shirts of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner conforming to class domestic, size 1A of MIL-B-17757 and each shipping container shall be assembled and closed as specified in the appendix thereto. The fiberboard used for fabricating the container and the liner shall be grade 275. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.2.3 Level C. Shirts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

*5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be inserted within each polyethylene bag in order to permit ready identification:

Nomenclature
Size_____Stock number_____
Contract number
Name of contractor

*5.3.1 Mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly printed the correct quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

6. NOTES

*6.1 Intended use. The shirts described herein are intended for wear by women personnel of the U.S. Marine Corps.

*6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

*6.2.1 Procurement requirements.

(a) Title, number and date of this specification.
(b) Sizes required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of shirts in first article (see 3.2).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) When level A, method 2, packing is required (see 5.2.1.2).

*6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

6.3 Samples and shade samples. For information regarding availability of sample shirt and standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

*6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship of the last previous issue.

Preparing activity:
Navy - MC
Project No. 8410-N304

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.


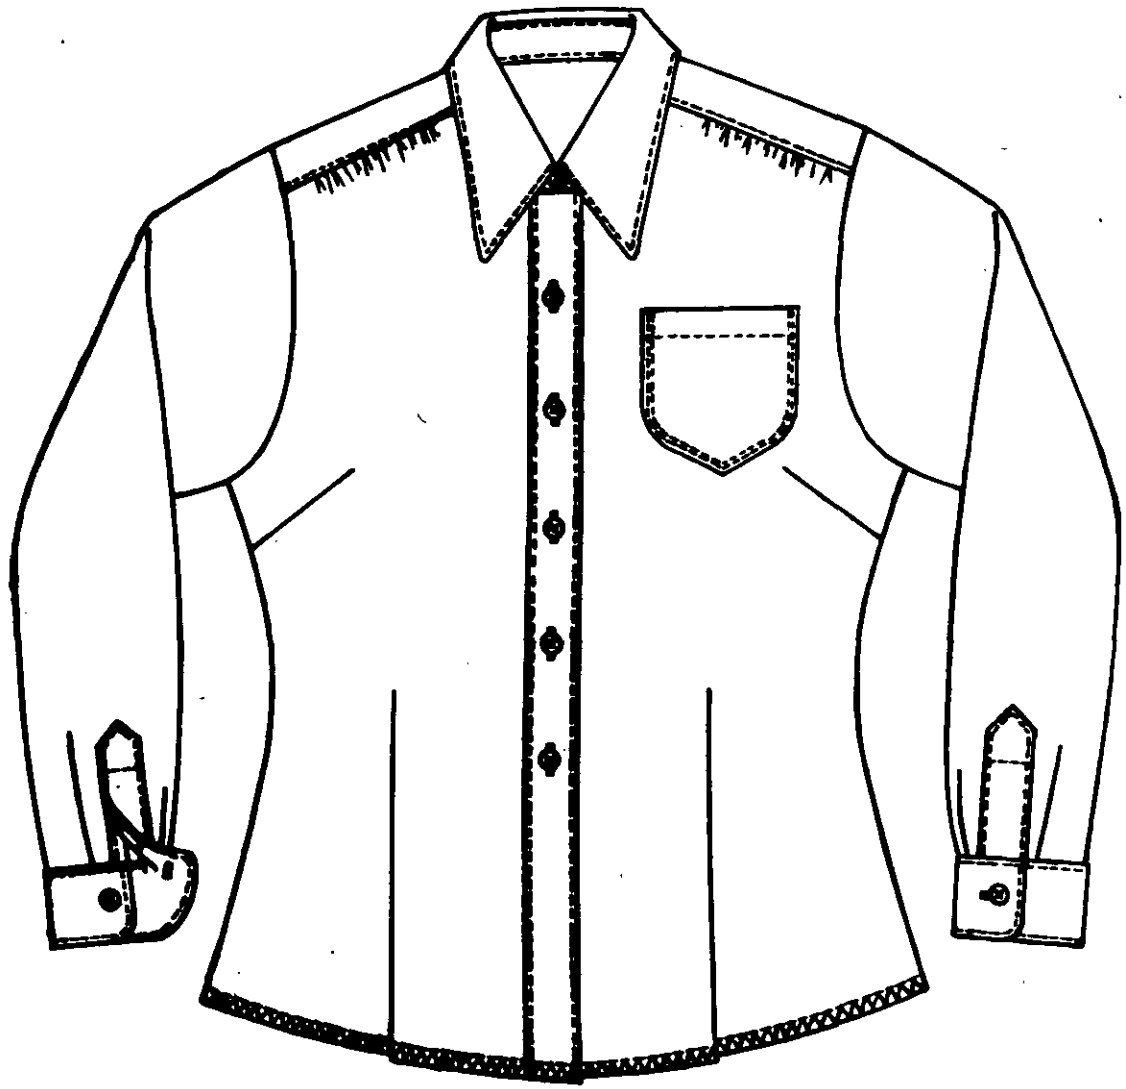


FIGURE 1. SHIRT, WOMAN'S: POLYESTER/COTTON; GREEN

M.C.S.A.
826:R,G,F
17 Jul 74

Source: https://assist.dla.mil -- Downloaded: 2026-0-19T11:53Z
Check the source to verify that this is the current version before use.

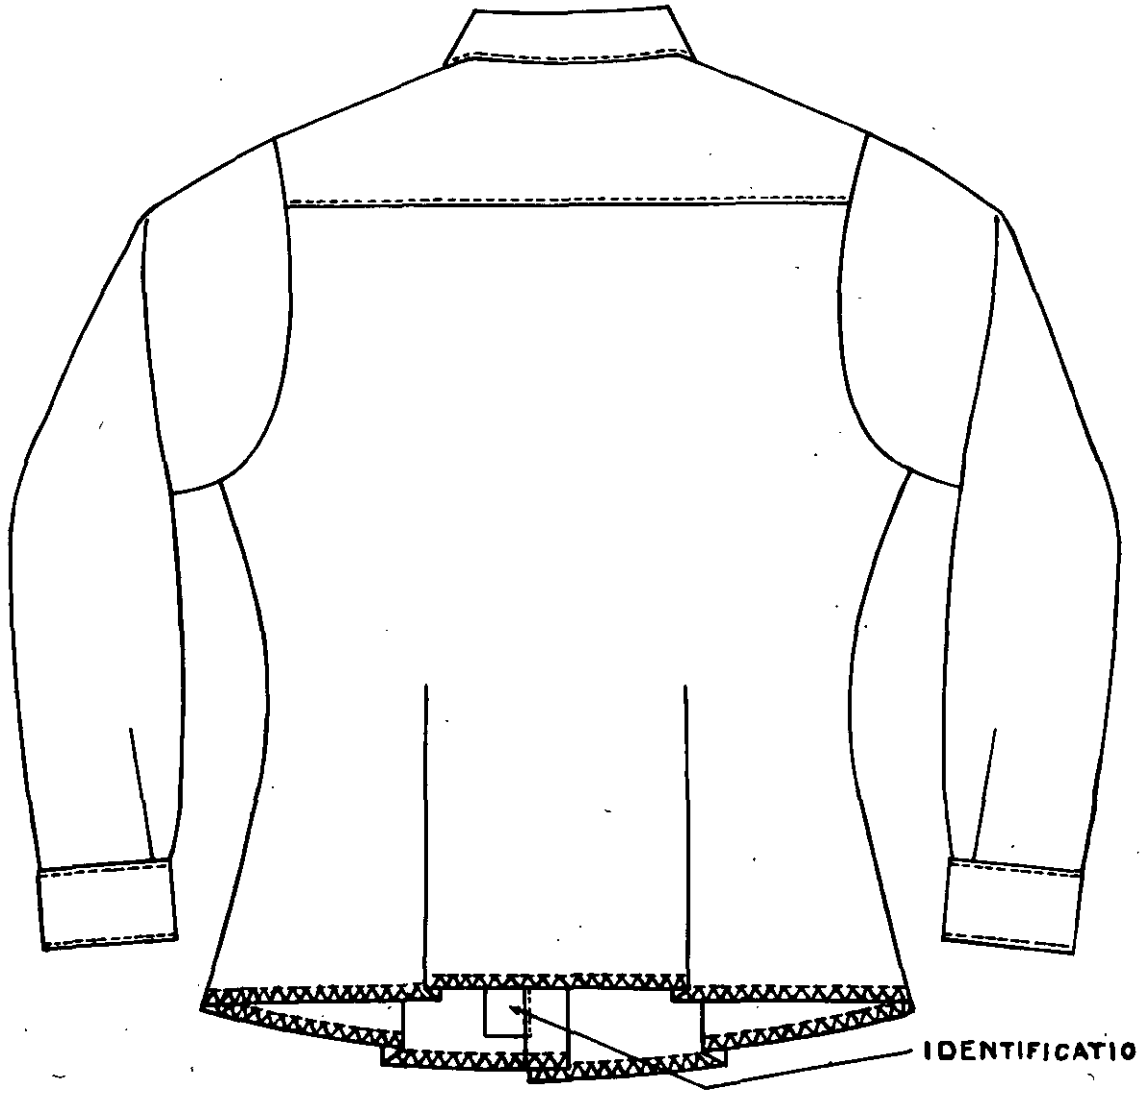


MIL-S-22320B(MC)

FIGURE 2. SHIRT, WOMAN'S: POLYESTER/COTTON; GREEN

M.C.S.A.
826:R.G.F.
17 Jul 74

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:53Z
Check the source to verify that this is the current version before use.

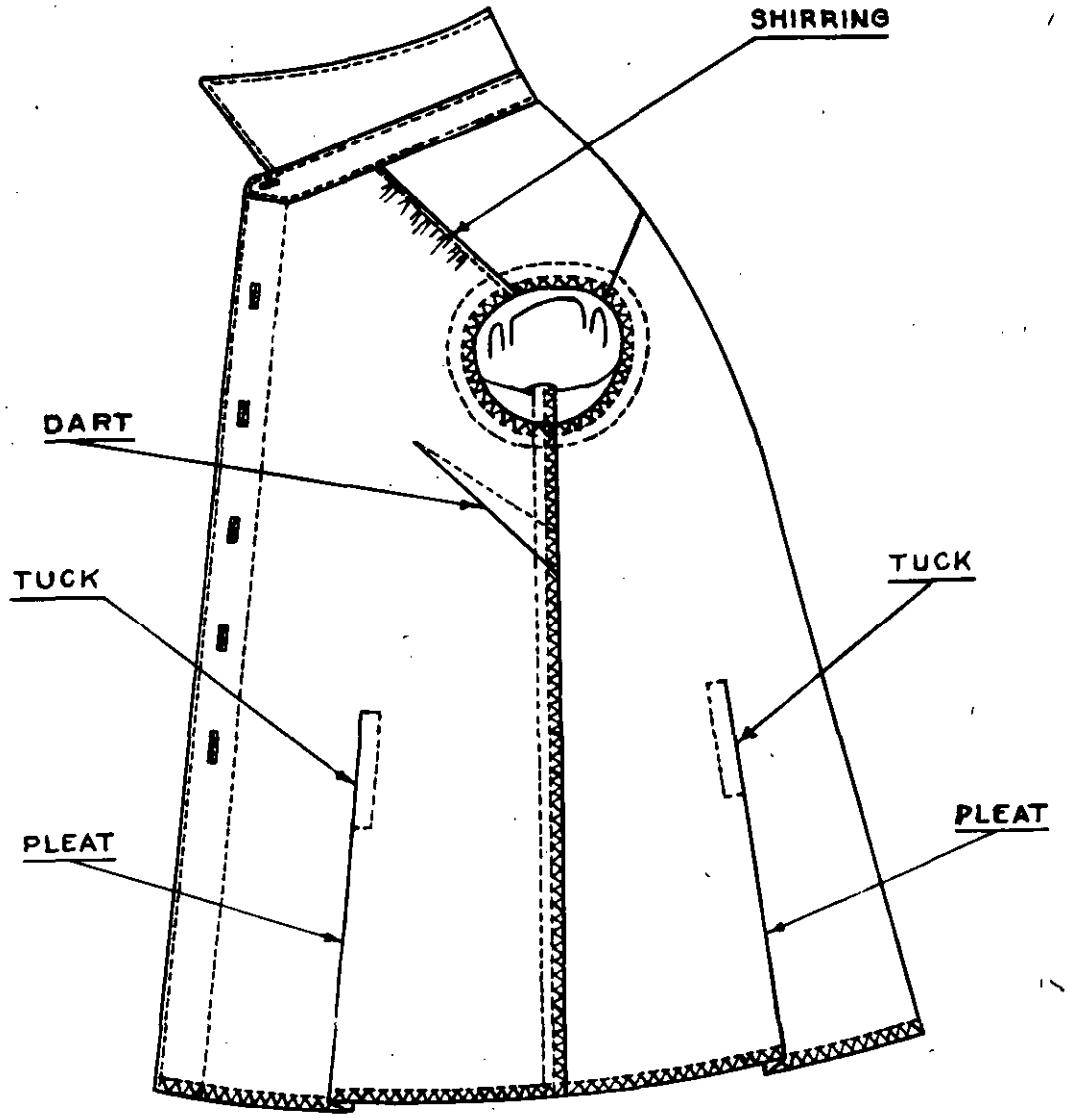

DETAIL: INSIDE, RIGHT

FIGURE 3. SHIRT, WOMAN'S: POLYESTER/COTTON; GREEN

M.C.S.A.
826 R.F.
17 Jul '74

☆U.S. GOVERNMENT PRINTING OFFICE: 1976—703-020:1693

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS,

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

☆ U.S. GOVERNMENT PRINTING OFFICE: 1972—714-865/3404 2-1

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:53Z
Check the source to verify that this is the current version before use.