MILITARY SPECIFICATION
VALVE, OXYGEN, PRESSURE BUILDUP AND VENT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1. Scope. This specification covers one type of pressure buildup and vent valve for use with high pressure and low pressure liquid oxygen converter systems.

* 2. APPLICABLE DOCUMENTS

2.1. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

O-T-236	Tetrachloroethylene (Perchloroethylene) Technical Grade
O-T-634	Trichloroethylene, Technical
BB-A-1034	Air, Compressed, For Breathing Purposes
BB-N-411	Nitrogen, Technical

Military

MIL-P-116	Preservation, Methods of
MIL-P-7105	Pipe Threads, Taper, Aeronautical National Form Symbol ANPT, General Requirements For
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series, General Specification For
MIL-A-8625	Anodic Coatings, For Aluminum and Aluminum Alloys

FSC: 1660

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

MIL-D-1000	Drawing, Engineering and Associated Lists
MIL-V-25961	Valve, Fill Buildup-Vent, Liquid Oxygen Converter CRU/50A
MIL-O-27210	Oxygen, Aviator's Breathing, Liquid and Gas

STANDARDS

Military

MIL-STD-129	Marking For Shipment and Storage
MIL-STD-130	Identification Marking of U. S. Military Property
MIL-STD-143	Specification and Standard, Order of Precedence For the Selection of
MIL-STD-721	Definitions of Effectiveness Terms for Reliability, Maintainability, Human Factors, and Safety
MIL-STD-785	Reliability Program for System and Equipment Development and Production
MIL-STD-794	Part and Equipment, Procedures For Packaging and Packing of
MIL-STD-831	Test Reports, Preparation of
MIL-STD-889	Metals, Dissimilar

DRAWINGS

AND 10053	Boss, Pipe Thread, Internal Standard Dimensions For

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1. Qualification. Valves furnished under this specification shall be products which are qualified for listing on the applicable qualified products list at the time set for opening of bids (see 4.3 and 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

3.2. First article inspection. First article inspection will be required for production contracts if specified by the procuring activity and shall be performed as stated in paragraph 4.4.

3.3 Materials.

3.3.1. Nonferrous materials. Nonferrous materials shall be used for all parts of the valve except where ferrous materials are essential.

3.3.2. Nonmetallic materials. Any nonmetallic materials that are easily deteriorated or otherwise adversely affected by continued service use with oxygen shall not be used. Non-metallic materials that may come in direct contact with liquid oxygen shall be non-hydrocarbon, non-impact sensitive with LOX, have a brittle point below -297°F, and shall be LOX compatible in all respects.

3.3.3. Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.3.4 Protective treatment. When materials are used in construction of the valve that are subject to corrosion in oxygen, salt air, or other atmospheric conditions likely to occur during service usage, they shall be protected against such corrosion in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of atmospheric conditions shall be avoided.


3.3.5. Aluminum or aluminum alloys. Aluminum and aluminum alloys, if used, shall be anodized in accordance with MIL-A-8625, Type I or Type II.

3.3.5.1. All metal parts shall be of a corrosion-resistant material or material treated in a manner to render it adequately resistant to corrosion. Brass, bronze, phosphor bronze, 18-8 corrosion-resistant steel, and anodized aluminum alloy are considered satisfactory corrosion-resistant materials.

3.3.6. Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.4. Design. The valve shall conform to Figure 1. It shall be designed to control gaseous oxygen flow in the pressure buildup and vent circuits of high-pressure (300 psig) and low-pressure (70 psig) liquid-oxygen converter systems. There shall be three ports (openings) in the valve. The gas and buildup ports are for connection to the corresponding outlets of the converter. The vent port goes to the atmosphere. The valve is a two-position

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

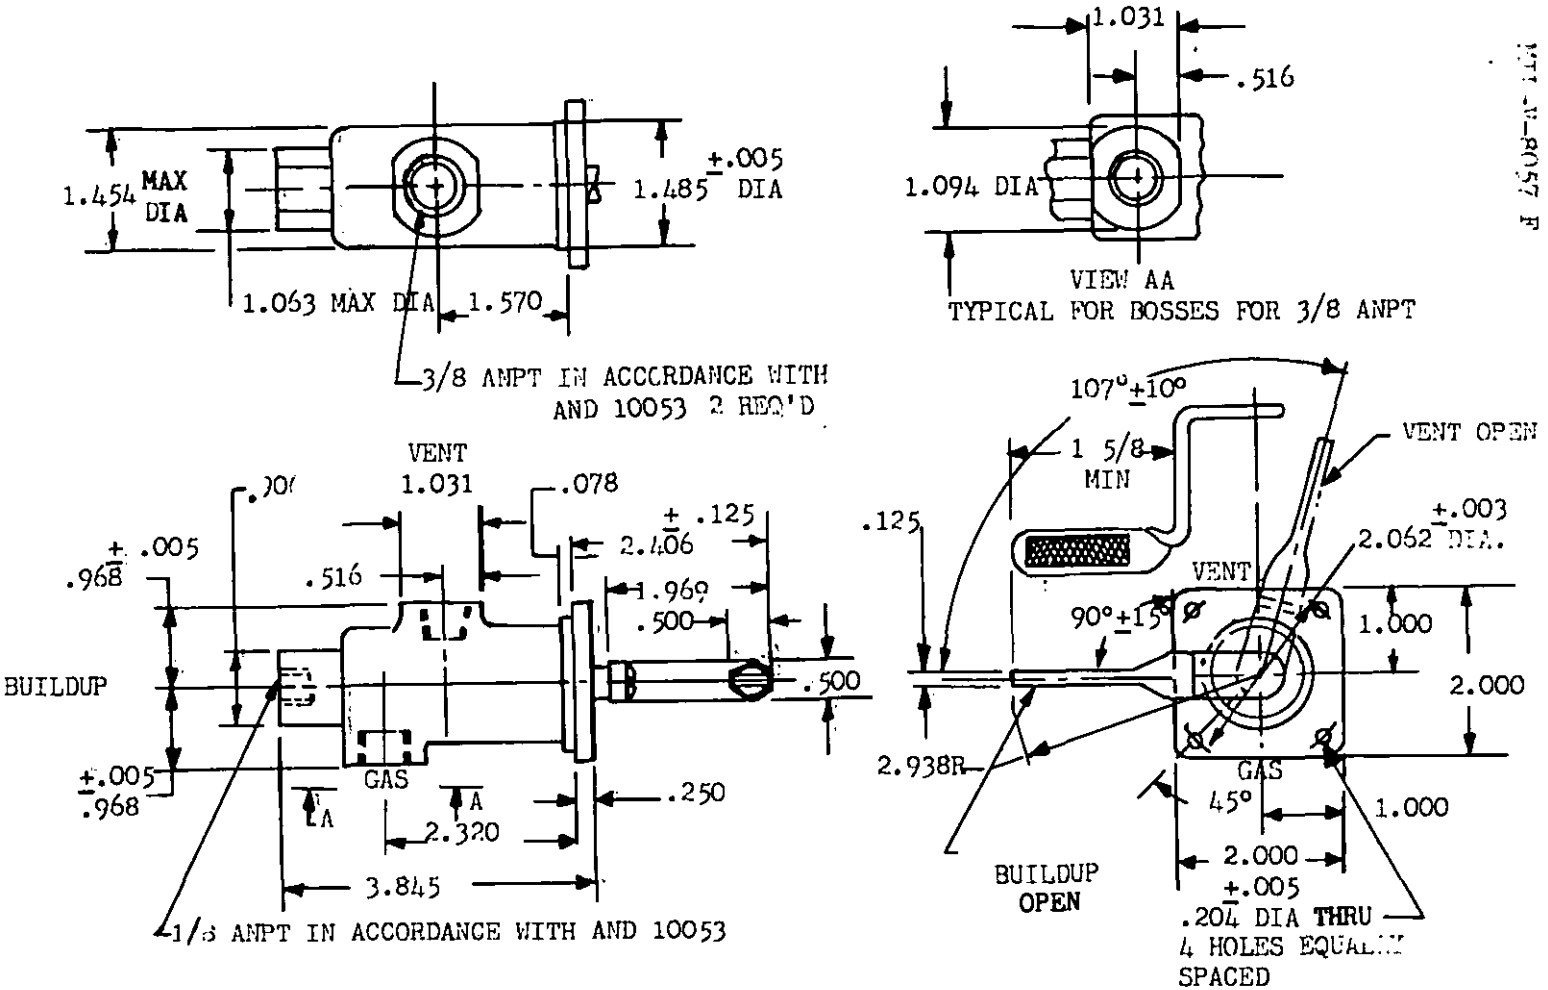


DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
TOLERANCES: DECIMALS ± .016 ANGLES ± 1°
THE PORTS AND POSITIONS OF THE HANDLE SHALL BE IDENTIFIED BY PERMANENT MARKINGS ON THE VALVES

FIGURE I. VALVE, OXYGEN, PRESSURE BUILDUP AND VENT (SEE FIG. 2 FOR OPTIONAL HANDLE)

MIL-V-8057F

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

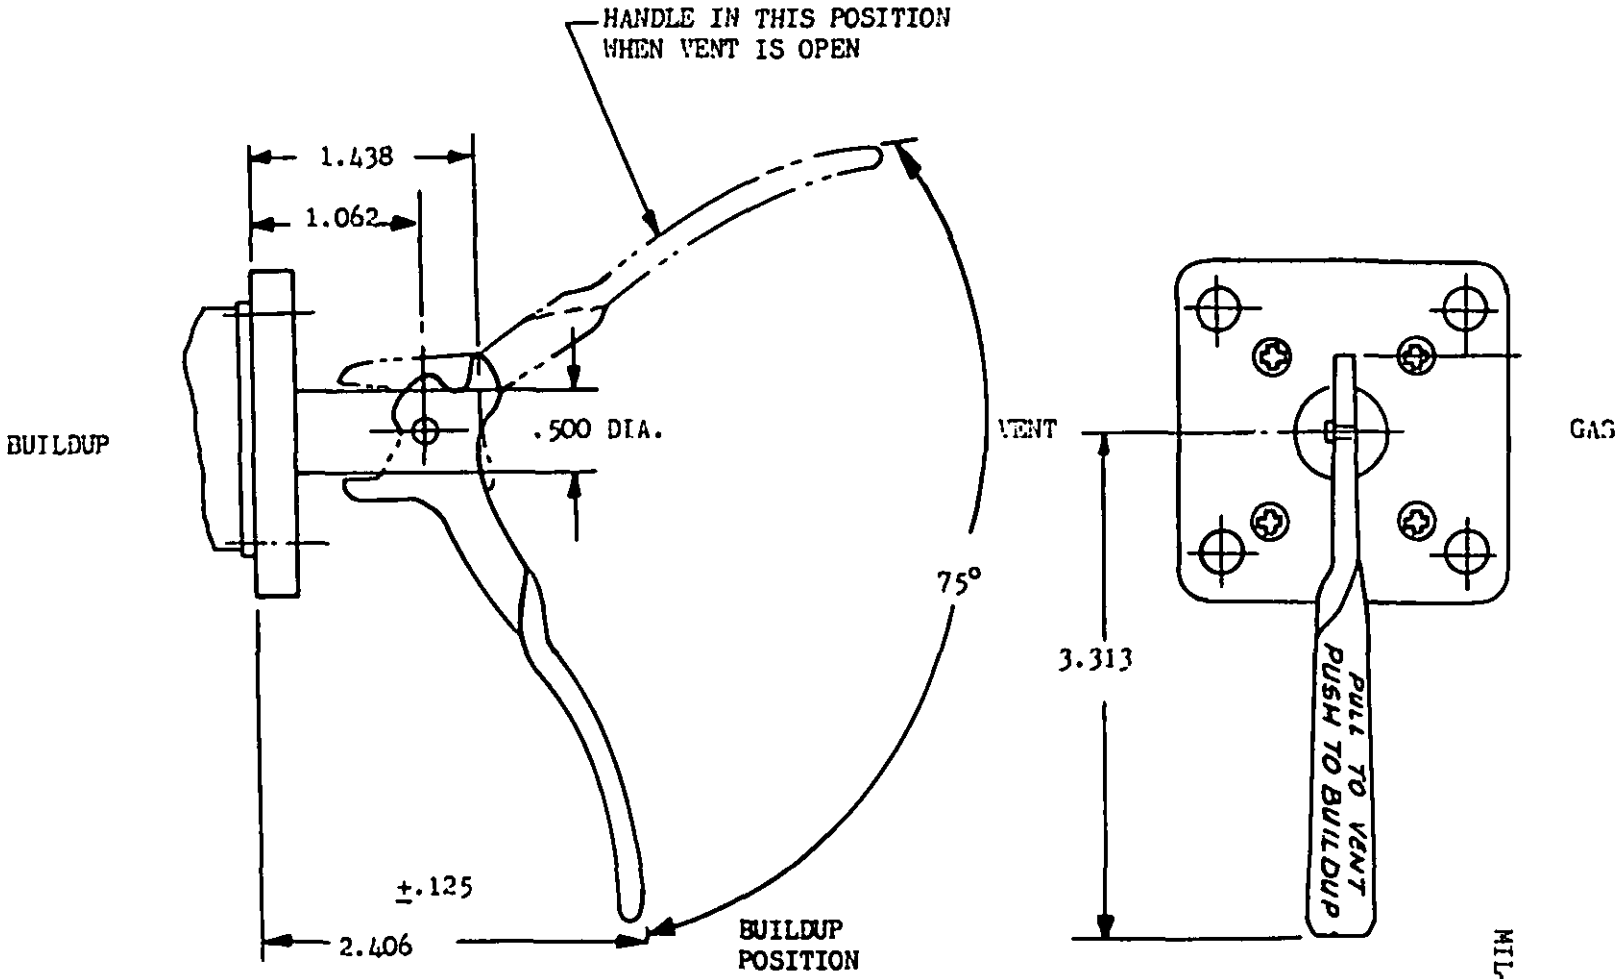

DIMINSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .016 ANGLES ± 1°
LETTERING ON VALVE HANDLE SHALL BE A PERMANENT MARKING
FIGURE 2 VALVE, OXYGEN, PRESSURE BUILDUP AND VENT (SEE FIG 1 OPTIONAL HANDLE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

valve. It shall be so designed that an internal force positions the valve. The internal force shall be sufficient to properly seat and to retain the valve in position while under all operating conditions. With the valve set in the buildup position, the vent shall be closed and the buildup line opened in order that the converter can build up to its operating pressure. In the vent position, the buildup line is closed, and the oxygen vents to the atmosphere as it evaporates.

3.5. Reliability

3.5.1. Reliability program. The contractor shall establish and maintain an effective reliability program in accordance with MIL-STD-785. Engineering for reliability shall occur simultaneously with the engineering to achieve mechanical characteristics. The terms and definitions for reliability not otherwise described or delineated herein shall be in accordance with MIL-STD-721.

*3.5.2. Reliability. The mean-cycles-between failure (MCBF) of the valve shall not be less than 1000 cycles, at the 90 percent confidence limit, before random or wearout failure occurs.

3.6. Construction. The valve shall be so constructed that no parts will work loose in service. It shall be built to withstand the strains, jars, vibrations, and other conditions incident to shipping, storage, installation, and service.

3.7. Interchangeability. All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation and performance. Changes in manufacturer's part number shall be governed by the drawing number requirements of MIL-D-1000.

3.8. Threads. All pipe threads shall conform to MIL-P-7105. Screw threads shall conform to MIL-S-7742.

3.9. Weight. The valve shall weigh not more than 0.85 pound.

*3.10. Degreasing. Prior to assembling the valve, all internal metallic parts shall be degreased using a vapor phase degreaser in accordance with O-T-236 or O-T-634. Ultrasonics may be used for the cleaning of components. After completion of the cleaning and when assembled, General Electric Type H leak detector or an equivalent halide testing apparatus will be used to determine the absence of the cleaning compound. Package immediately with as little exposure as possible after cleaning.

3.11. Performance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

3.11.1. Orientation. The valve shall be capable of meeting the requirements specified in 4.7.9, while mounted in any position.

* 3.11.2. Vent-port leakage. With the valve set in the buildup position, gaseous pressures of 70 and 300 psig and 10 inches of water, shall be applied to the buildup port. The gas port shall be plugged, and the combined leakage through the vent port and around the valve stem shall not exceed 0.05 liter per minute.

* 3.11.3. Gas-port leakage. With the valve set in the vent position, combined leakage through the gas port and around the valve stem shall not exceed 0.25 liter per minute when approximately 30 psig gaseous pressure is applied to the buildup port with the vent port plugged. Under similar conditions, leakage shall not exceed 0.05 liter per minute when 10 inches of water pressure is applied to the buildup port.

3.11.4. High-temperature operation. The valve shall be capable of operating satisfactorily at a temperature of 260 $\pm$ 5°F.

3.11.5. Low-temperature operation. The valve shall be capable of satisfactory operation at liquid-oxygen temperatures -297 $\pm$ 5°F and at -65 $\pm$ 5°F.

3.11.6. Vibration. The valve shall be capable of satisfactory operation while being vibrated at a frequency ranging from 500 and 3,000 cpm and return to 500 cpm in 15 minute periods with a constant amplitude of 0.02 inch for 24 hours.

3.11.7. Overpressure. The valve shall be capable of withstanding an internal pressure of 500 psig without deformation or subsequent leakage.

3.11.8. Flow rates. The valve shall allow a flow of at least 1.4 cfm from the buildup port to the gas port (with the valve set in the buildup position), with a differential pressure of not more than 21 inches of water. It shall allow a flow of at least 4.3 cfm from the gas port to the vent port (with the valve set in the vent position), with the differential pressure not more than 34 inches of water.

3.11.9. Operating torque. The torque required to set the valve in either position shall not exceed 60 pound-inches.

3.12. Identification of product. Each valve shall be permanently and legibly marked in accordance with MIL-STD-130, giving the vendor identification and part number.

3.12.1. Use of AN or MIL designations. AN or MIL designations shall not be applied to a product, except for qualification test samples, nor referred to in correspondence, until notice of approval has been received from the activity responsible for qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

3.13. Workmanship. The valve shall be manufactured in a thoroughly workmanlike manner. It shall be clean and free from oil, grease, or other foreign matter, both externally and internally, to prevent any possibility of fire or explosion when the valve is used with high-pressure oxygen.

4. QUALITY ASSURANCE PROVISIONS

4.1. Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specifications where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.2. Classification of inspections. The examinations and tests shall be as follows:

a. Qualification inspection (4.3)
b. First article inspection (4.4)
c. Quality conformance inspection (4.5)

*4.3. Qualification inspection. Qualification inspection shall consist of performing all examinations and tests specified herein. Four qualification samples shall be subjected to the reliability test specified in paragraph 4.8.1.

4.3.1. Qualification test report. Three copies of the qualification test report shall be prepared in accordance with MIL-STD-831 and shall be forwarded to the requiring activity for approval (see 6.3). Drawings shall be included giving complete engineering details.

4.3.2. Qualification test sample. Along with the qualification test report, the contractor shall submit to the procuring activity one test sample which may have been subjected to non-destructive portions of the qualification tests for examinations and tests deemed necessary by the procuring activity.

4.4. First article inspection. First article samples as specified in 4.4.1 shall be submitted (see 4.4.1.1) for the performance of examinations and tests deemed necessary by the procuring activity.

*4.4.1. Samples. First article samples shall consist of three valves. The samples shall be representative of the construction, workmanship, components, and materials used during production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

4.4.1.1. Submitting samples. Unless otherwise specified, as soon as practicable after the award of the contract or order, samples specified in 4.4.1 shall be forwarded as specified in the contract or order. The samples shall be plainly identified by securely attached durable tags marked with the following information:

> Samples submitted by (name) (date) for first article inspection in accordance with MIL-V-8057F under Contract No._____.

When a contractor is in continuous production of these valves from contract to contract, submission of further samples on the new contract may be waived at the discretion of the procuring activity. Approval of the first article samples or the waiving of the first article inspection does not preclude the requirements for performing the quality conformance inspections.

4.4.1.2. Disposition of samples. Samples not destroyed in testing shall be returned to the manufacturer. Samples submitted for inspection shall not be considered as part of the quantity to be delivered under contract.

4.5. Quality conformance inspection. Quality conformance inspection shall consist of individual examinations and tests and sample examinations and tests specified in 4.5.1 and 4.5.2, respectively.

4.5.1. Individual tests. Each valve shall be subjected to the following tests. Valves having a defect or failing to pass the applicable test shall be rejected.

a.	Examination of product	(4.7.1)
b.	Vent-port leakage	(4.7.2)
c.	Gas-port leakage	(4.7.3)

*4.5.2. Sampling tests. Three valves shall be selected at random from each lot of 500 valves or fraction thereof on the order and subjected to the following tests:

a.	High-temperature operation	(4.7.4)
b.	Low-temperature operation	(4.7.5)
c.	Vibration	(4.7.6)
d.	Overpressure	(4.7.7)
e.	Flow rates	(4.7.8)

A lot shall be defined as valves manufactured under essentially the same condition at substantially the same time, under the same contract or order.

4.5.3. Rejection. When any item from a lot fails the specified tests, this shall be cause for rejection of the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

4.6. Test conditions.

*4.6.1. Temperature and pressure. Unless otherwise specified, tests shall be conducted at ambient conditions. Flow tests conducted other than within the parameters of 30 ± 2 inches of mercury atmospheric pressure and 77 ± 18°F shall be mathematically corrected to reflect actual flow at ambient conditions.

*4.6.2. Gas. Gas used in testing the valves shall be either oxygen conforming to MIL-D-27210 Type I; air conforming to BB-A-1034 Grade A or C; or nitrogen conforming to BB-N-411, Class 1, Grade A.

4.6.3. Only the internal force shall be used to position the valve at either position.

4.7. Test methods.

4.7.1. Examination of product. Unless otherwise specified by the procuring activity, each valve shall be inspected to determine conformance to this specification with respect to material, workmanship, and markings.

*4.7.2. Vent-port leakage. The gas port of the valve shall be suitably plugged and the valve set in the buildup position. Gaseous pressures of 70 and 300 psig and 10 inches of water shall be applied to the buildup port. Under these conditions, the combined leakage around the valve stem and through the vent port shall not exceed 0.05 liter per minute.

4.7.3. Gas-port leakage. The vent port of the valve shall be suitably plugged and the valve set in the vent position. A gaseous pressure of approximately 30 psig shall be applied to the buildup port. Under these conditions, combined leakage through the gas port and around the valve stem shall not exceed 0.25 liter per minute. Under similar conditions, leakage shall not exceed 0.05 liter per minute when 10 inches of water pressure is applied to the buildup port.

4.7.4. High-temperature operation. The sample valves shall be heated to a temperature of at least 260°F for not less than 1 hour. While maintained at this temperature, they shall be subjected to the Vent-port leakage and Gas-port leakage tests as specified in 4.7.2 and 4.7.3 respectively.

*4.7.5. Low temperature operation. The valve shall be subjected to a temperature of -65°F for at least 4 hours. While at this temperature, the valve shall then be subjected to the Vent-port leakage and Gas-port leakage tests as specified in 4.7.2 and 4.7.3, respectively.

*4.7.6. Vibration. The sample valves shall be vibrated at a frequency ranging from 500 and 3,000 cpm with an amplitude of at least 0.02 inch for a period of 24 hours. After the 24-hour period, and while still being vibrated, the sample valves shall be subjected to the Vent-port leakage and Gas-port leakage tests as specified in 4.7.2 and 4.7.3 respectively. Leakage over that specified shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

*4.7.7. Overpressure. The valve shall be set to the buildup position. At least 500 psig pressure shall be applied to the buildup port for a period of at least 1 minute. Any visible deformation of either sample valve shall be cause for rejection of the lot. After application of the 500 psig pressure, the sample valves shall be subjected to the Vent-port leakage and Gas-port leakage tests as specified in 4.7.2 and 4.7.3 respectively. Leakage over that specified shall be cause for rejection.

*4.7.8. Flow rates. With the sample valves set in the vent position, a pressure of 34 inches of water shall be applied to the gas port. Gas flow through the valve shall be measured by means of the rotometer or other suitable means. The flow rate shall be at least 4.3 ambient cfm. The valves shall then be set in the buildup position and a pressure of 21 inches of water applied to the buildup port. The flow rate through the valve shall be at least 1.4 ambient cfm. The tests may also be checked by adjusting the flow rates through the valves to the given amount. In this case, the differential pressure measured in inches of water shall be less than the amounts specified.

4.7.9. Orientation. The flow rates test as specified in 4.7.8 shall be accomplished on the valve while it is in each of three mutually perpendicular positions. The flow rates shall be within the limits specified, in each of the positions.

*4.7.10. Extreme low temperature operation. The valve shall be connected to a 300 psi working pressure LOX converter in an assimulated aircraft manner. With the valve in the vent position the converter shall be filled with liquid oxygen at 20 to 40 psi and allowed to run over for one minute. There shall be no evidence of leakage around the valve stem during this test. The source will be disconnected from the converter and the valve immediately placed in the buildup position. This operation shall completely cut off the flow of liquid oxygen and there shall be no evidence of leakage of liquid. Leakage through the valve shall be measured at the vent port as the converter pressure builds up throughout the entire range from 0 to 300 psi. After one minute gaseous leakage shall not exceed 0.05 liters per minute. Following this test, each valve shall be subjected to the vent-port and gas-port leakage tests as specified in 4.7.2 and 4.7.3 respectively.

*4.8. Reliability qualification demonstration. Four samples shall be tested for reliability. The reliability of the equipment shall be expressed in terms of 90 percent confidence that the MCBF shall be equal to or greater than 1000 cycles. The equipment shall be operated under cryogenic conditions simulating actual usage. A cycle shall consist of flowing liquid oxygen through the valve while in the vent position at 20 to 40 psi, placing the valve in buildup and applying 300 psi to the gas and buildup ports, then releasing the pressure by returning the valve to the vent position. After each 250 cycles each valve shall be subjected to the extreme low temperature operation test per paragraph 4.7.10 above including the vent-port and gas-port leakage tests. Each of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

four samples will be cycled until failure. A failure consists of any deficiency or condition such that the valve cannot meet all of the performance requirements contained herein. Reliability qualification will consist of meeting the accept/reject criteria of 4.8.1.

*4.8.1. Reliability accept reject criteria. The following accept/reject criteria will be used to determine reliability qualification. From the test data (time to failure of each of the four samples) the sample MCBF ($\overline{X}$) will be determined by:

$$\overline{X} = \frac{1}{n} \sum_{i=1}^{n} x_i$$

where

x_i = cycles to failure of the ith valve
n = sample size (4)

The sample standard deviation (S) is determined using:

$$S = \sqrt{\frac{\sum_{i=1}^{n} (x_i - \overline{X})^2}{n-1}}$$

if $\overline{X} \geq 1000 + 0.819S$

accept, otherwise reject. If no failure occurs before 1100 cycles are completed on each of the four valves, stop test and accept.

4.9. Preservation and packaging. Unless otherwise specified in the purchase order or contract, the supplier is responsible for the performance of all inspections required as listed in Table III, of MIL-P-116 for the method of preservation being accomplished.

*5. PREPARATION FOR DELIVERY

5.1. Preservation and packaging. Unless other wise specified by the procuring activity, the valves shall be prepared for delivery in accordance with MIL-STD-794.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

*5.1.1. Levels A, B and C. Each valve shall be preserved and packaged in accordance with Method IA-8 of MIL-P-116 without contact preservatives immediately after cleaning (3.10).

5.2. Packing. The required level of packing A, B or C shall be specified by the procuring activity (see paragraph 6.2).

5.2.1. Level A. Each valve preserved as specified in paragraph 5.1.1 shall be packed in exterior type weather resistant containers. All containers shall be closed, sealed and reinforced in accordance with the appendix thereto.

5.2.2. Level B. All valves preserved as specified in paragraph 5.1.1 shall be packed in domestic type exterior containers. All containers shall be closed and strapped in accordance with the appendix thereto.

5.2.3. Level C. All packaged valves which require over-packing for acceptance by the carrier shall be packed in exterior type shipping containers in such a manner as to insure safe transportation at the lowest rate to the point of delivery. Containers shall meet the uniform freight classification rules or regulations of other common carriers as applicable to the mode of transportation.

5.3. Marking. The exterior and interior containers shall be marked in accordance with MIL-STD-129.

5.3.1. Precautionary marking. The following precautionary marking shall appear on each unit package:

CAUTION:
DO NOT ALLOW CONTAMINANTS OF ANY KIND
TO BE USED ON OR ABOUT VALVES

6. NOTES

6.1. Intended use. The valve covered by this specification is intended to be used to control the flow of gaseous oxygen in the pressure buildup and vent circuits of liquid oxygen converter systems up to 300 psig operating pressure.

*6.2. Ordering data. Procurement documents shall specify the following:

a. Title, number, and date of this specification.

b. Selection of applicable levels of preservation, packaging, and packing.

c. Unit quantities.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

d. If first article inspection is required for production contracts DD Form 1423 will be made part of the contract to require that reproducible copies of the test report be furnished to the procuring activity.

e. Whether or not first article inspection is required for production contracts.

6.3. Qualification. With respect to products requiring qualification, awards will be made only for products which are at the time set for opening of bids, qualified for inclusion in the applicable Qualified Products List whether or not such products have actually been so listed by that date. The attention of the suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is OCAMA (MMEO), Tinker Air Force Base Oklahoma City, Oklahoma 73145 and information pertaining to qualification of the products may be obtained from that activity.

*6.3.1. Qualification test data. When requested, the manufacturer shall submit engineering drawings and inspection reports in accordance with Defense Standardization Document SD-6 Provisions Governing Qualification.

NOTE: The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians
Navy - AS
Air Force - 71

Preparing Activity:
Air Force - 71

Project Number:
1660-0295

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Air Force OC, 27 Aug 71-200

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:52Z
Check the source to verify that this is the current version before use.