
FEDERAL SPECIFICATION SHEET

RUBBER, SILICONE; ROUND SECTION

This specification is approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the channels described herein shall consist of this document and the latest issue of ZZ-R-765/GEN.



PART NO. ZZR765/10-	A OUTER DIA.	NHR	MIN. TS	FAB METH	ENV PROT	SURFACE	LENGTH
001C7	0.139	65.0 to 75.0	N/R	Solid	Hi Temp	Smooth	A/A
002C6	0.410	60.0	650 PSI	Extruded	Hi & Lo Temp	A/A	A/A
003F6*	0.030 to 0.050	45.0 to 65.0	1000 PSI	Solid	Tear	Smooth	9.81 to 10.31

*GRADE 5 ACCEPTABLE.

NOTES:
1. Dimensions are in inches.
2. NHR: Nonmetallic Hardness Rating: Shore Durometer A.
3. MIN. TS: Minimum Tensile Strength.
4. FAB METH: Fabrication Method.
5. ENV PROT: Environmental Protection.
6. A/A: Any Acceptable.
7. N/R: Not Rated.
8. Color: Any Acceptable.
9. When metric units are required, units for inch and psi may be converted to the metric equivalent as follows:

English	Multiply by	Equals	Metric unit
inch	2.54	=	centimeter (cm)
psi	6.894×10^{-3}	=	mega pascal (MPa)


AMSC: N/A

/FSC 9320/

DISTRIBUTION STATEMENT A Approved for public release; distribution umlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.

PART NUMBERING SYSTEM FOR FEDERAL SPECIFICATION ZZ-R-765/GEN

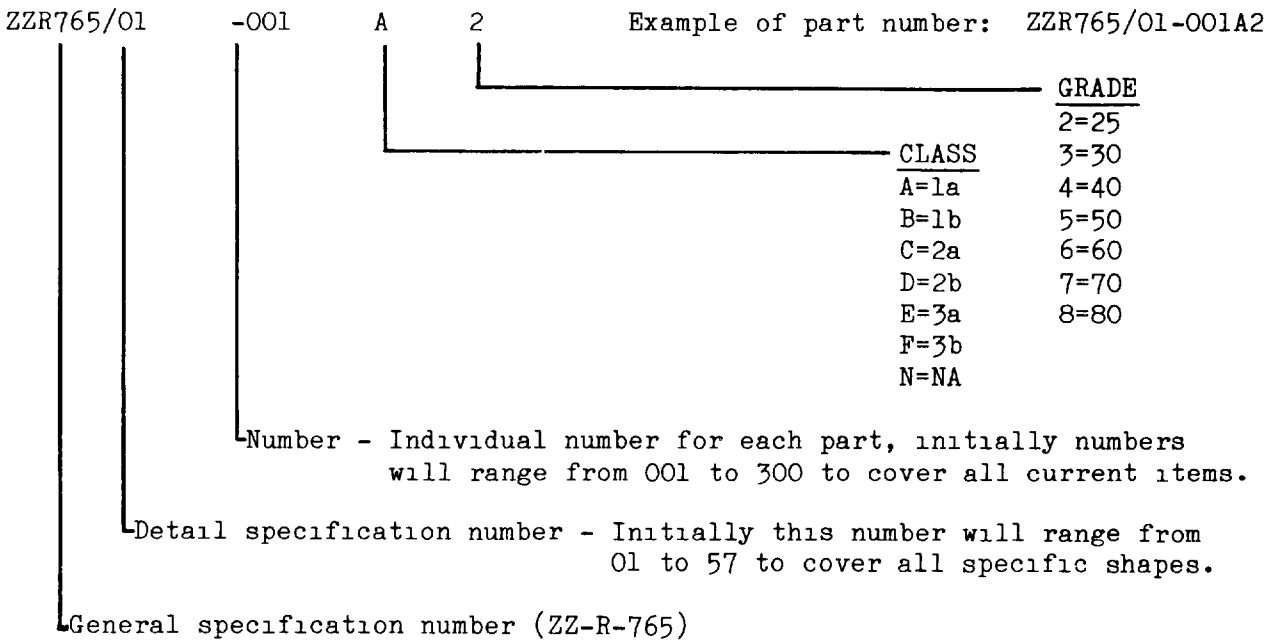

MILITARY INTERESTS:

Custodians

Army -- MR
Navy -- AS
Air Force -- 20

Review activity

DLA -- GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA -- FSS

PREPARING ACTIVITY:

Army -- MR

Project No. 9320-0363

(KBWP# ID-7059A/DISK-0555A. FOR AMMRC USE ONLY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.