
FEDERAL SPECIFICATION SHEET

RUBBER, SILICONE; GASKET

This specification is approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the gaskets described herein shall consist of this document and the latest issue of ZZ-R-765/GEN.



PART NO. ZZR765/13-	A APERTURE DIAMETER	B OUTSIDE DIAMETER	PART NO. ZZR765/13-	A APERTURE DIAMETER	B OUTSIDE DIAMETER
001D4	17.625	18.875	006D4	17.125	18.375
002D4	19.000	20.375	007D4	16.375	17.312
003D4	16.625	18.250	008D4	17.438	18.375
004D4	18.375	19.375	009D4	16.438	17.375
005D4	16.375	18.375	010D4	15.375	16.312

NOTES:
1. Dimensions are in inches.
2. Nonmetallic Hardness Rating: 35.0 min. and 45.0 max. Shore Durometer A.
3. Temperature Rating: -62°C to 218.50°C (-80°F to 425°F).
4. Cross - Sectional Shape Style: 164.
5. Cross - Sectional Thickness: 0.125.
6. When metric units are required, units for inch may be converted to the metric equivalent as follows:

English	Multiply by	Equals	Metric unit
inch	2.54	=	centimeter (cm)


AMSC: N/A

/FSC 9320/

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

PART NUMBERING SYSTEM FOR FEDERAL SPECIFICATION ZZ-R-765/GEN

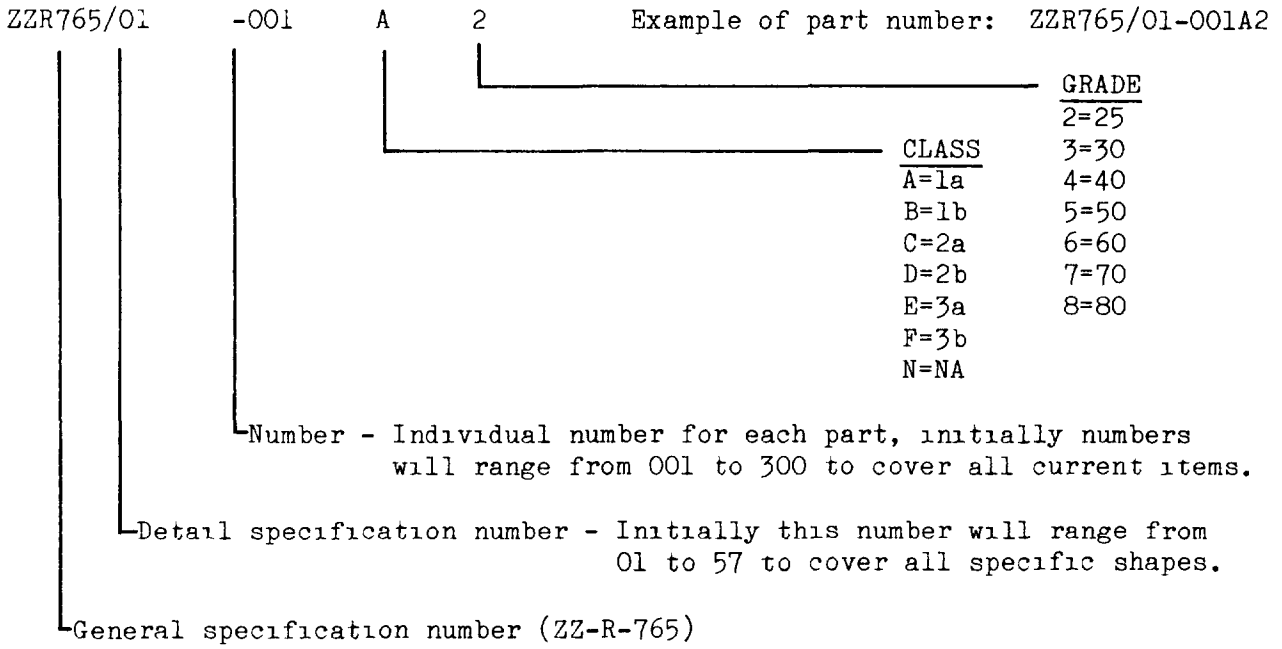

MILITARY INTERESTS:

Custodians

Army -- MR
Navy -- AS
Air Force -- 20

Review activity

DLA -- GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA -- FSS

PREPARING ACTIVITY:

Army -- MR

Project No. 9320-0383

(KBWP# ID-7059A/DISK-0555A. FOR AMMRC USE ONLY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.