
FEDERAL SPECIFICATION SHEET

RUBBER, SILICONE; GASKET

This specification is approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the gaskets described herein shall consist of this document and the latest issue of ZZ-R-765/GEN.

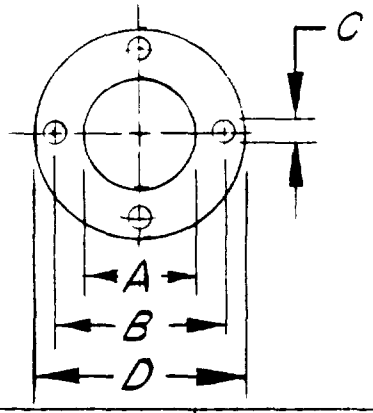

PART NO. ZZR765/14-	A APERTURE DIAMETER	B BOLT CIRCLE DIAMETER	BOLT HOLE QUANTITY	A HOLE DIAMETER	A OUTSIDE DIAMETER
001D4	20.688	22.000	24	0.562	23.625
002D4	19.000	21.500	36	0.438	22.500
003D4	16.000	19.375	36	0.562	20.375
004D4	23.500	24.375	42	0.438	25.500
005D4	15.375	18.625	24	0.438	20.031

NOTES:
1. Dimensions are in inches.
2. Nonmetallic Hardness Rating: 35.0 min. to 45.0 max. Shore Durometer A.
3. Temperature Rating: -62°C to 218°C (-80°F to 425°F).
4. Cross - Sectional Shape Style: 164.
5. Cross - Sectional Thickness: 0.125.
6. When metric units are required, units for inch may be converted to the metric equivalent as follows:

English	Multiply by	Equals	Metric unit
inch	2.54	=	centimeter (cm)


AMSC: N/A

/FSC 9320/

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

PART NUMBERING SYSTEM FOR FEDERAL SPECIFICATION ZZ-R-765/GEN

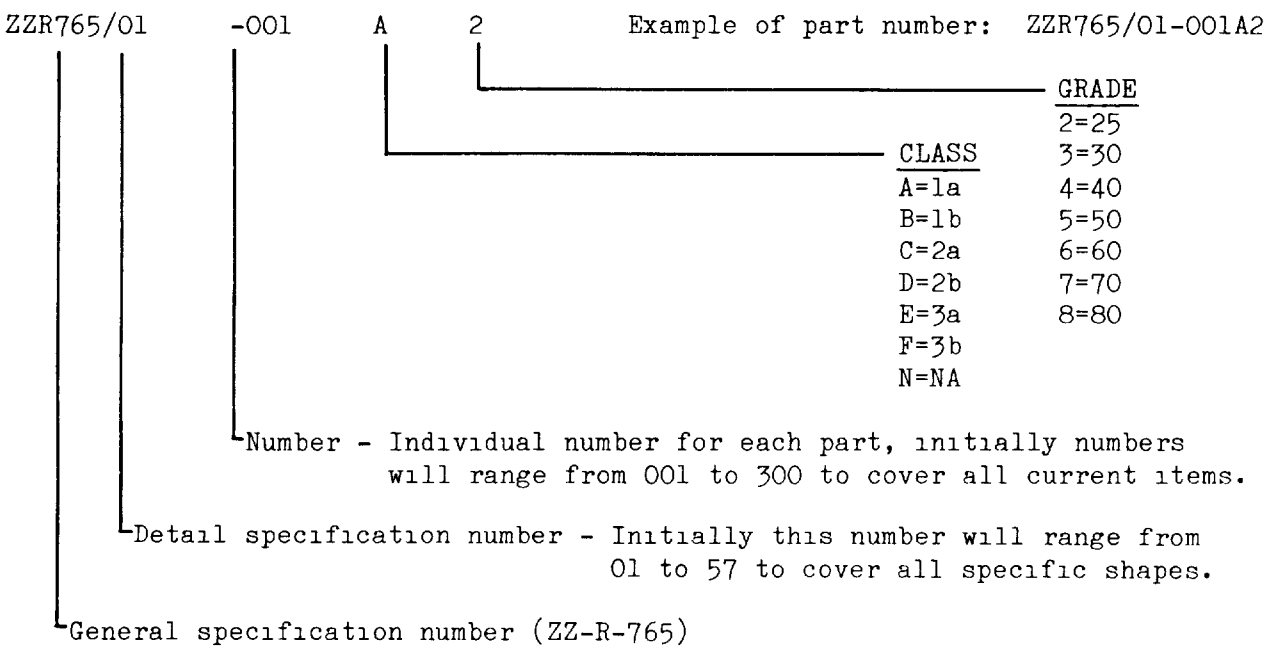

MILITARY INTERESTS:

Custodians

Army -- MR
Navy -- AS
Air Force -- 20

Review activity

DLA -- GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA -- FREV

PREPARING ACTIVITY:

Army -- MR

Project No. 9320-0383

(KBWP# ID-7059A/DISK-0555A. FOR AMMRC USE ONLY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.