
ZZ-R-765/18A
10 November 1987
SUPERSEDING
ZZ-R-765/18
21 February 1986

FEDERAL SPECIFICATION SHEET

RUBBER, SILICONE; RUBBER STRIP

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the strips described herein shall consist of this document and the latest issue of ZZ-R-765/GEN.

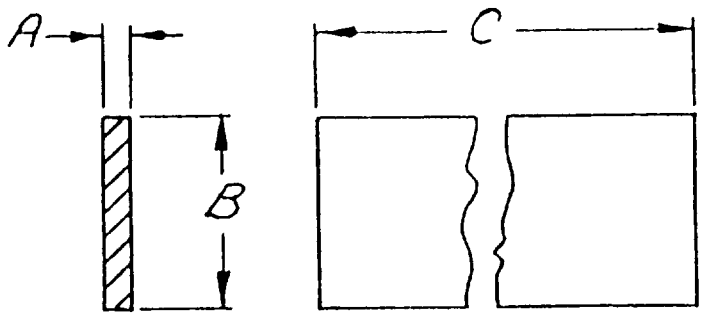

PART NO. ZZR765/18-	A WIDTH	B HEIGHT	C LENGTH	NHR MIN MAX	MIN TENSILE STRENGTH P.S.I.	TEMPERATURE RATING °F
001C5	0.015	0.400	9.8	45.0-55.0	700	-80 to 425
002D7	0.032	1.500	15.0	65.0-75.0	650	-80 to 425
003A5	0.031	2.000	3.0	45.0-55.0	700	-100 to 425
004C6	0.031	2.000	6.0	55.0-65.0	650	-80 to 425
005C5	0.047	0.750	25.0	45.0-55.0	700	-80 to 425
006C5	0.047	0.750	27.0	45.0-55.0	700	-80 to 425
007C5	0.047	0.750	73.0	45.0-55.0	700	-80 to 425
008C5	0.047	0.750	130.0	45.0-55.0	700	-80 to 425
009C5	0.750	0.750	198.0	45.0-55.0	700	-80 to 425
010C5	0.062	1.500	144.0	45.0-55.0	700	-80 to 425

AMSC N/A

/FSC 9320/

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

PART NO. ZZR765/18-	A WIDTH	B HEIGHT	C LENGTH	NHR MIN MAX	MIN TENSILE STRENGTH P.S.I.	TEMPERATURE RATING °F
011D4	0.062	3.000	6.0	35.0-45.0	700	-100 to 425
012C5	0.062	4.000	72.5	45.0-55.0	700	-80 to 425
*013B	0.090	0.500	1.5	35.0-75.0	600	-100 to 425
014A4	0.090	0.880	1.6	35.0-45.0	700	-100 to 425
015C5	0.090	1.880	13.5	45.0-55.0	700	-80 to 425
016D5	0.093	0.250	A/A	45.0-55.0	700	-80 to 425
017A4	0.125	0.550	6.6	35.0-55.0	700	-100 to 425
018C5	0.125	0.500	19.0	45.0-55.0	700	-80 to 425
019D4	0.125	0.500	54.3	35.0-45.0	700	-80 to 425
020D4	0.125	1.000	56.6	35.0-45.0	700	-80 to 425
021D4	0.125	1.000	63.3	35.0-45.0	700	-80 to 425
022C5	0.125	1.062	144.0	45.0-55.0	700	-80 to 425
023F3	0.250	0.500	66.0	25.0-35.0	1000	-94 to 400
**024C8	0.250	0.910	10.2	75.0-85.0	500	-100 to 425
025C5	0.250	2.000	34.2	45.0-55.0	700	-80 to 425
026D6	0.250	5.000	80.3	55.0-65.0	650	-80 to 425
027C5	0.375	0.625	A/A	45.0-55.0	700	-80 to 425
028C5	0.375	1.250	25.3	45.0-55.0	700	-80 to 425
029D4	0.375	2.000	14.3	35.0-45.0	700	-80 to 425
030B5	0.562	0.562	144.0	45.0-55.0	700	-100 to 425
031E5	0.750	0.250	72.0	45.0-55.0	1200	-100 to 425
032E3	0.750	5.000	1200.0	20.0-35.0	850	-130 to 400
034F6	4.000	0.063	8.0	55.0-65.0	1200	-94 to 400
035B5	0.730	0.078	5.7	45.0-55.0	700	-100 to 425
***036F3	0.080	0.375	180.0	25.0-35.0	1000	-94 to 400

* Grades 40 to 70 acceptable.
** Special Features: 0.120 in. X 45° chamfer on 4 corners.
*** Unless otherwise specified, color should be gray.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.


NOTES: 1. Dimensions are in inches.
2. NHR: Nonmetallic Hardness Rating, Shore Durometer A.
3. Minimum Tensile Strength in Pounds per square inch.
4. Surface Condition: Smooth Both Sides.
5. A/A: Any Acceptable.
8. When metric units are required, units for inch, degree fahrenheit and psi may be converted to the metric equivalent as follows:

English	Multiply by	Equals	Metric unit
inch	2.54	=	centimeter (cm)
degree fahrenheit	$(t^{o}F-32)/1.8$	=	degree Celsius (^{o}C)
psi	6.894×10^{-3}	=	mega pascal (MPa)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

ZZ-R-765/18A

PART NUMBERING SYSTEM FOR FEDERAL SPECIFICATION ZZ-R-765/GEN

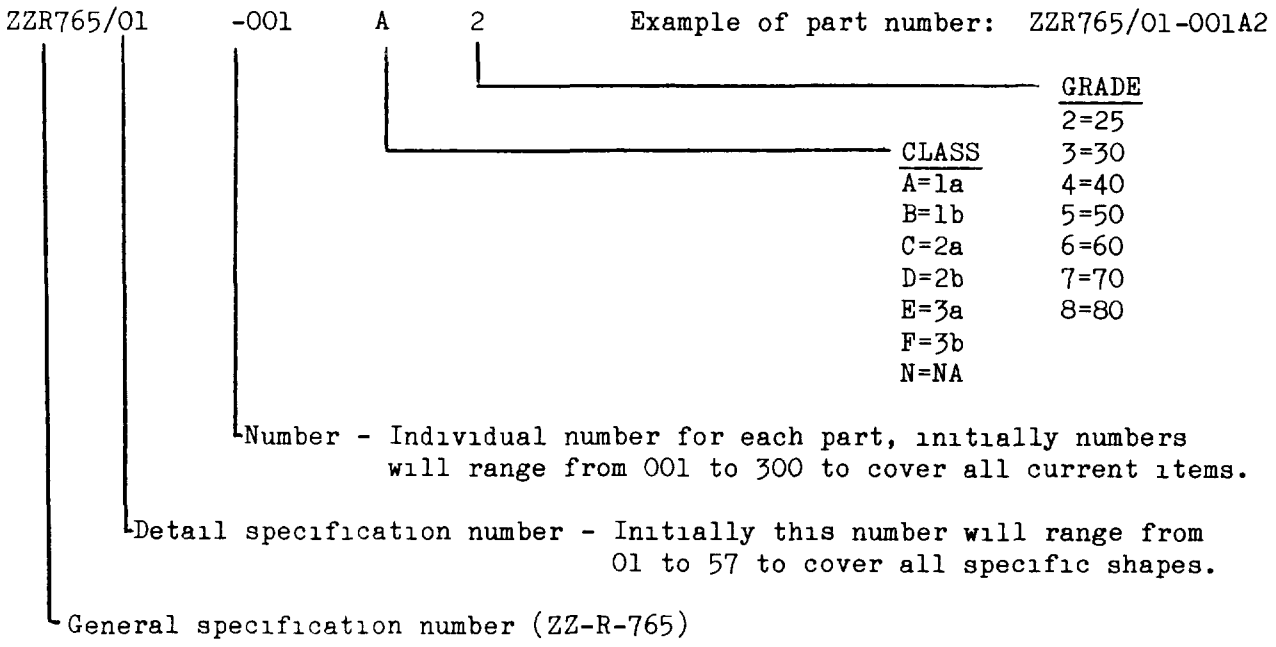

MILITARY INTERESTS:

Custodians:
Army - MR
Navy - AS
Air Force - 20

Review activity:
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA -- FSS

PREPARING ACTIVITY:
Army - MR

Project No. 9320-1027

(KBWP# ID-7059A/DISK-0555A. FOR MTL USE ONLY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.