ZZ-R-765/33


21 February 1986

FEDERAL SPECIFICATION SHEET

RUBBER, SILICONE; NONMETALLIC SPECIAL SHAPED SECTION

This specification is approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the sections described herein shall consist of this document and the latest issue of ZZ-R-765/GEN.

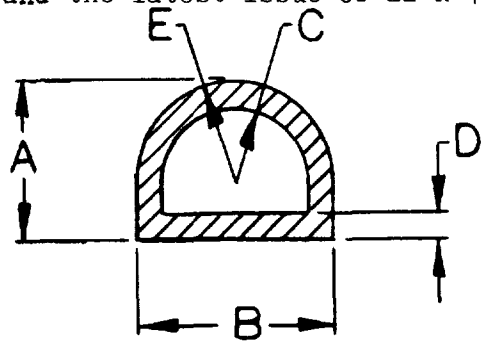

HALF ROUND, HOLLOW CORE

PART NO. ZZR765/33-	A Height	B Width	C Inside Radius	D Base Flange Thickness	E Outside Radius	Length	NHR	MTS PSI	Temperature Rating °F
001F3	0.380	0.500	0.190	0.060	0.250	28.0	25.0 to 35.0	1000	-94 to 400
002C4	0.094 to 0.125	0.157 to 0.250	0.062	A/A	0.094	A/A	35.0 to 45	700	-80 to 400
003F7	0.340 to 0.370	0.620 to 0.750	A/A	0.062	A/A	6.94 to 7.06	65.0 to 75.0	1100	-94 to 400

NOTES:
1. Dimensions are in inches.
2. NHR: Nonmetallic Hardness Rating Shore Durometer A.
3. MTS: Minimum Tensile Strength: psi.
4. Color: Natural.
5. A/A: Any Acceptable.
6. When metric units are required, units for inch, degree fahrenheit and psi may be converted to the metric equivalent as follows:

English	Multiply by	Equals	Metric unit
inch	2.54	=	centimeter (cm)
degree fahrenheit	$(t^{\circ}F-32)/1.8$	=	degree Celsius ($^{\circ}C$)
psi	6.894×10^{-3}	=	mega pascal (MPa)


AMSC: N/A

FSC 9320

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

PART NUMBERING SYSTEM FOR FEDERAL SPECIFICATION ZZ-R-765/GEN

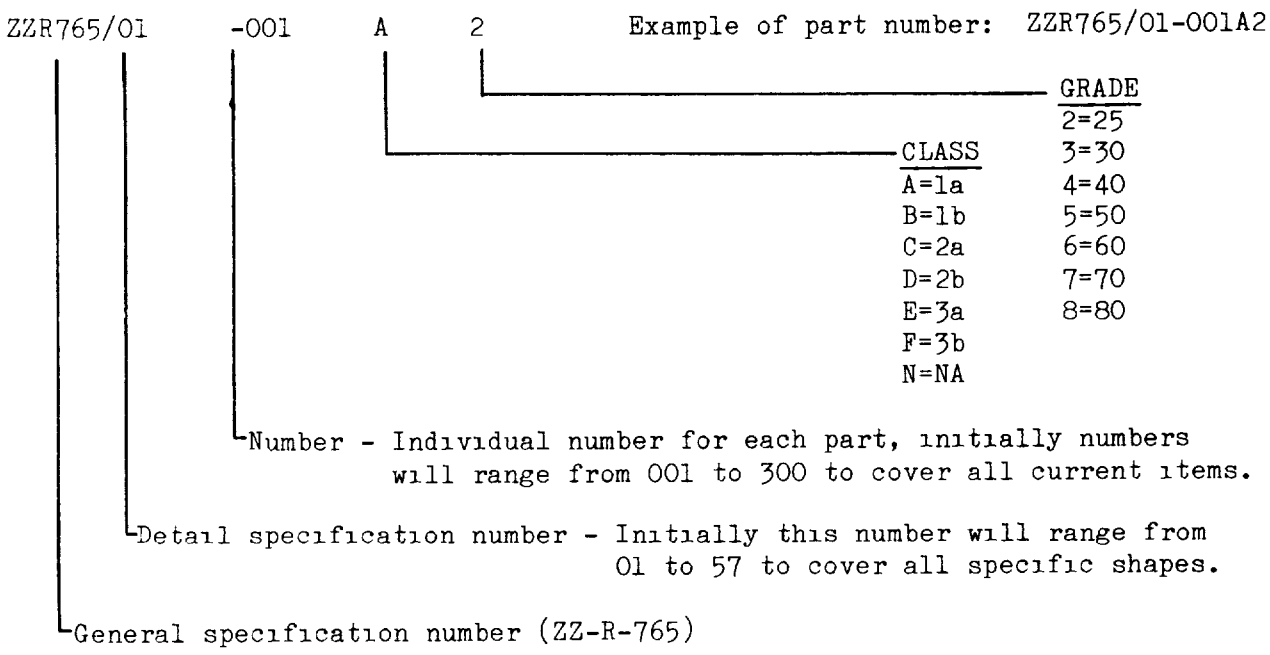

MILITARY INTERESTS:

Custodians

Army -- MR
Navy -- AS
Air Force -- 20

Review activity

DLA -- GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA -- FSS

PREPARING ACTIVITY:

Army -- MR

Project No. 9320-0386

(KBWP# ID-7078A/DISK-0535A. FOR AMMRC USE ONLY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.