
FEDERAL SPECIFICATION SHEET

RUBBER, SILICONE; NONMETALLIC SPECIAL SHAPED SECTION

This specification is approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the sections described herein shall consist of this document and the latest issue of ZZ-R-765/GEN.

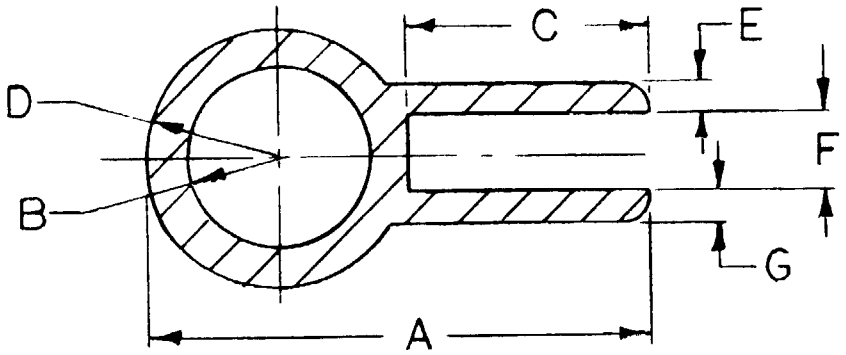

HOLLOW CORE, DOUBLE FLANGE

PART NO. ZZR765/41-	A Overall Width	B Inside Radius	C First Slot Grove Depth	D Outside Radius	E First Top Thick-ness	F First Slot Grove Width	G Second Flange Thick-ness	Length	NHR	MTS PSI	Color	Tempera-ture Rating °F
001A6	0.718			0.171				45.0	60.0	650	White Natural	-100 to 425
002B5	1.060	0.188	0.500	0.250	0.062	0.062	0.062	A/A	45.0 to 55.0	1200	Gray Pale	-130 to 400

AMSC: N/A

/FSC 9320/

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

NOTES: 1. Dimensions are in inches.
2. NHR: Nonmetallic Harness Rating
Shore Durometer A.
3. Minimum Tensile Strength: psi.
4. A/A: Any Acceptable.
5. When metric units are required, units for inch, degree fahrenheit and psi may be converted to the metric equivalent as follows:

English	Multiply by	Equals	Metric unit
inch	2.54	=	centimeter (cm)
degree fahrenheit	(t°F-32)/1.8	=	degree Celsius (°C)
psi	6.894 X 10-3	=	mega pascal (MPa)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

PART NUMBERING SYSTEM FOR FEDERAL SPECIFICATION ZZ-R-765/GEN

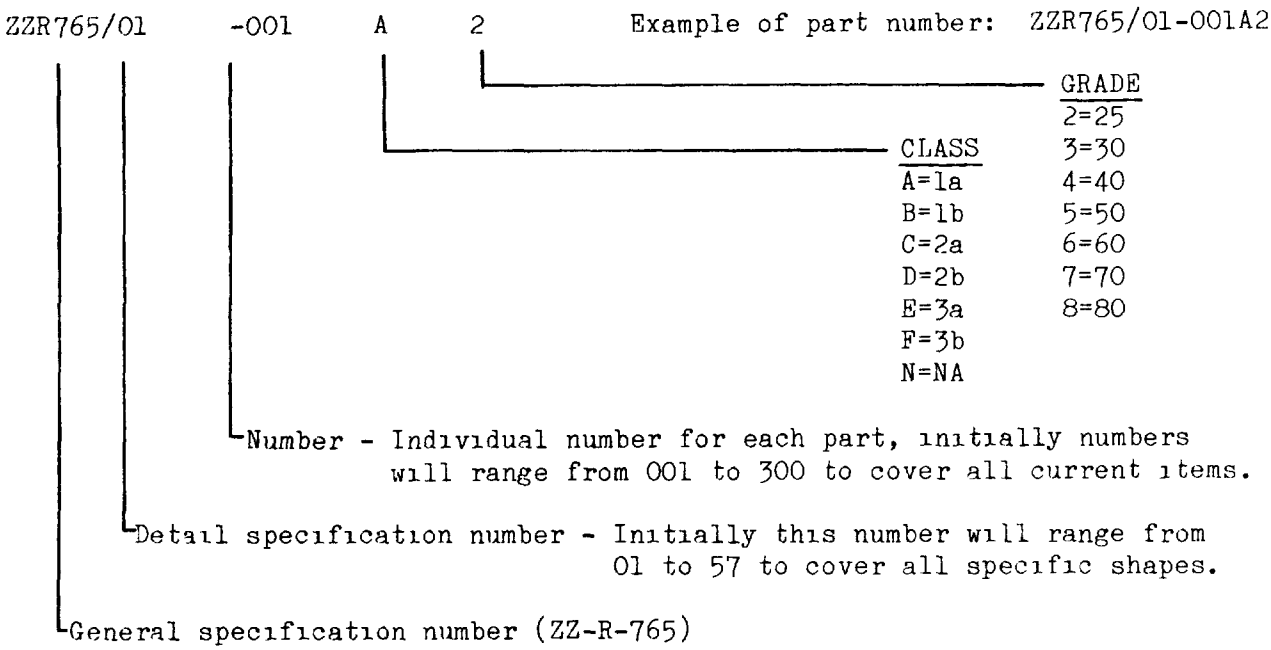

MILITARY INTERESTS:

Custodians

Army -- MR
Navy -- AS
Air Force -- 20

Review activity

DLA -- GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA -- FSS

PREPARING ACTIVITY:

Army -- MR

Project No. 9320-0386

(KBWP# ID-7078A/DISK-0535A. FOR AMMRC USE ONLY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.