
FEDERAL SPECIFICATION SHEET

RUBBER, SILICONE; NONMETALLIC SPECIAL SHAPED SECTION

This specification is approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the sections described herein shall consist of this document and the latest issue of ZZ-R-765/GEN.

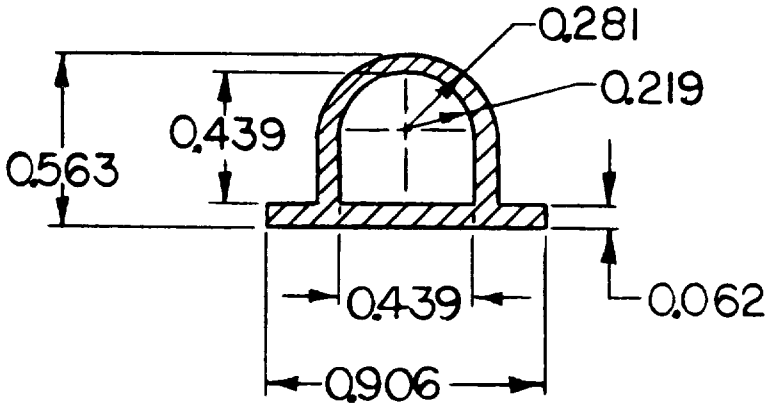

ARCH SHAPE, HOLLOW CORE

PART NO.
ZZR765/56-001F3

NOTES:
1. Dimensions are in inches.
2. Length: 33.9 inches nominal.
3. Nonmetallic Hardness Rating: 25.0 minimum to 35.0 maximum Shore Durometer A.
4. Minimum Tensile Strength: 1000 psi.
5. Color: Natural.
6. Temperature Rating: -70°C to 204°C (-94°F. to 400°F).
7. When metric units are required, units for inch and psi may be converted to the metric equivalent as follows:

English	Multiply by	Equals	Metric unit
inch	2.54	=	centimeter (cm)
psi	6.894×10^{-3}	=	mega pascal (MPa)

AMSC: N/A

/FSC 9320/

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

ZZ-R-765/56

PART NUMBERING SYSTEM FOR FEDERAL SPECIFICATION ZZ-R-765/GEN

ZZR765/01 -001 A 2 Example of part number: ZZR765/01-001A2

GRADE
2=25
3=30
4=40
5=50
6=60
7=70
8=80

CLASS
A=1a
B=1b
C=2a
D=2b
E=3a
F=3b
N=NA

Number - Individual number for each part, initially numbers will range from 001 to 300 to cover all current items.

Detail specification number - Initially this number will range from 01 to 57 to cover all specific shapes.

General specification number (ZZ-R-765)

MILITARY INTERESTS:

Custodians

Army -- MR
Navy -- AS
Air Force -- 20

Review activity

DLA -- GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA -- FSS

PREPARING ACTIVITY:

Army -- MR

Project No. 9320-0386

(KBWP# ID-7078A/DISK-0535A. FOR AMMRC USE ONLY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.