NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-27/134A
23 April 1979
SUPERSEDING
MIL-T-27/134
10 September 1976

PERFORMANCE SPECIFICATION SHEET

TRANSFORMERS, AUDIO FREQUENCY, SUB-MINIATURE, TF5R21ZZ (A)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

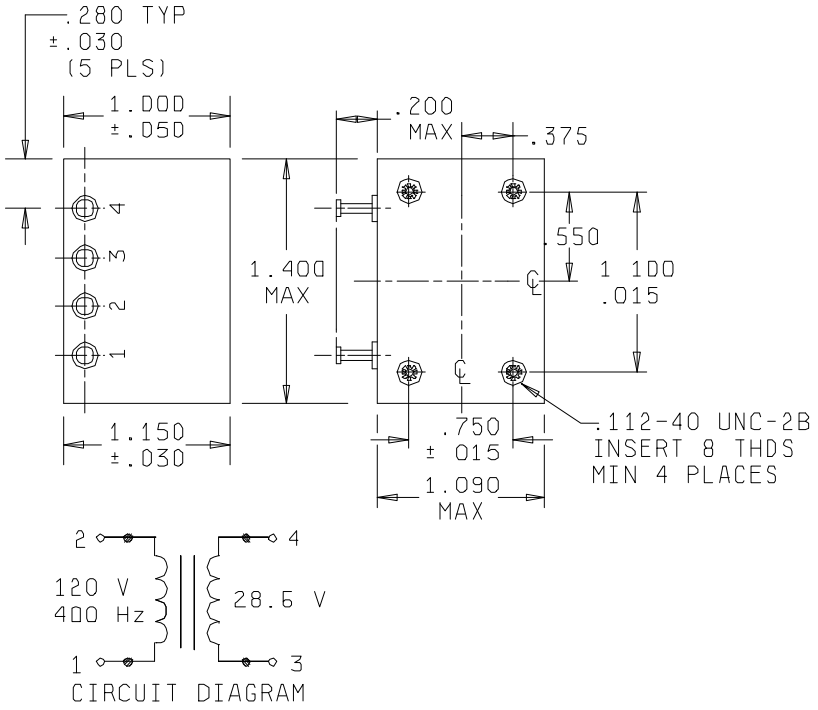

INCHES	MM
.015	0.38
.030	0.76
.050	1.27
.200	5.08
.280	7.11
.375	9.53
.550	13.97
.750	19.05
1.000	25.40
1.090	27.69
1.100	27.94
1.150	29.21
1.400	35.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Marking shall be on sides of case.

FIGURE 1. Dimensions and configurations.

(A) DENOTES CHANGE

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e. (1-2) are used, they indicate the extreme terminals of the windings.)

Electrical ratings:

Primary voltage:

(1-2): 120 volts, 400 Hz, 12 VA.

Secondary voltage:

(3-4): 28.6 Vrms, 0.385 Arms.

Working voltage: 250 volts.

Design and construction:

Dimensions and configuration: See figure.

Duty cycle: Continuous.

Case: Epoxy, Glass per MIL-P-25421, Type 1, Class 2.

Terminals: Solder, Turret type

Material: Brass, silver-plated.

Height: .200 inches maximum.

Weight: 100 grams.

Altitude: 50,000 feet.

Operating temperature range: -65°C to +155°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage:

at sea level: 700 volts rms.

at barometric pressure: 312 volts rms.

Electrical characteristics:

No load: With 120 volts and 400 Hz in (1-2):

Current in (1-2): 20 mA maximum.

Power in (1-2): 2.40 watts maximum.

Voltage across (3-4): 31.5 Vrms ±2%.

Rated load: With 120 volts and 400 Hz (1-2):

Voltage across (3-4): 28.6 Vrms ±5%.

Current in (3-4): 0.385 Arms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:35Z
Check the source to verify that this is the current version before use.

DC resistance: (1-2) - 49.5 ohms.

(3-4) - 3.1 ohms.

Polarity: Additive, with terminals 2 and 3 connected.

Temperature rise: 55°C with 120 volts, 400 Hz across (1-2) at an ambient temperature of 100°C.

Vibration: MIL-STD-202, method 204, test condition D.

Marking location: See figure.

Part number: M27/134-1.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - MC, AS,
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950- 0562-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE MIL-T-27/134A TRANSFORMER, POWER, STEP-DOWN, TF5V03ZZA

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:35Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Cdr, US Army ERADCOM
ATTN: DELET-RP
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:35Z
Check the source to verify that this is the current version before use.