INCH-POUND

MIL-PRF-27/134B
9 November 2009
SUPERSEDING
MIL-PRF-27/134A
23 April 1979

PERFORMANCE SPECIFICATION SHEET

TRANSFORMER, POWER, STEP-DOWN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the transformer described herein shall consist of this specification sheet and MIL-PRF-27.

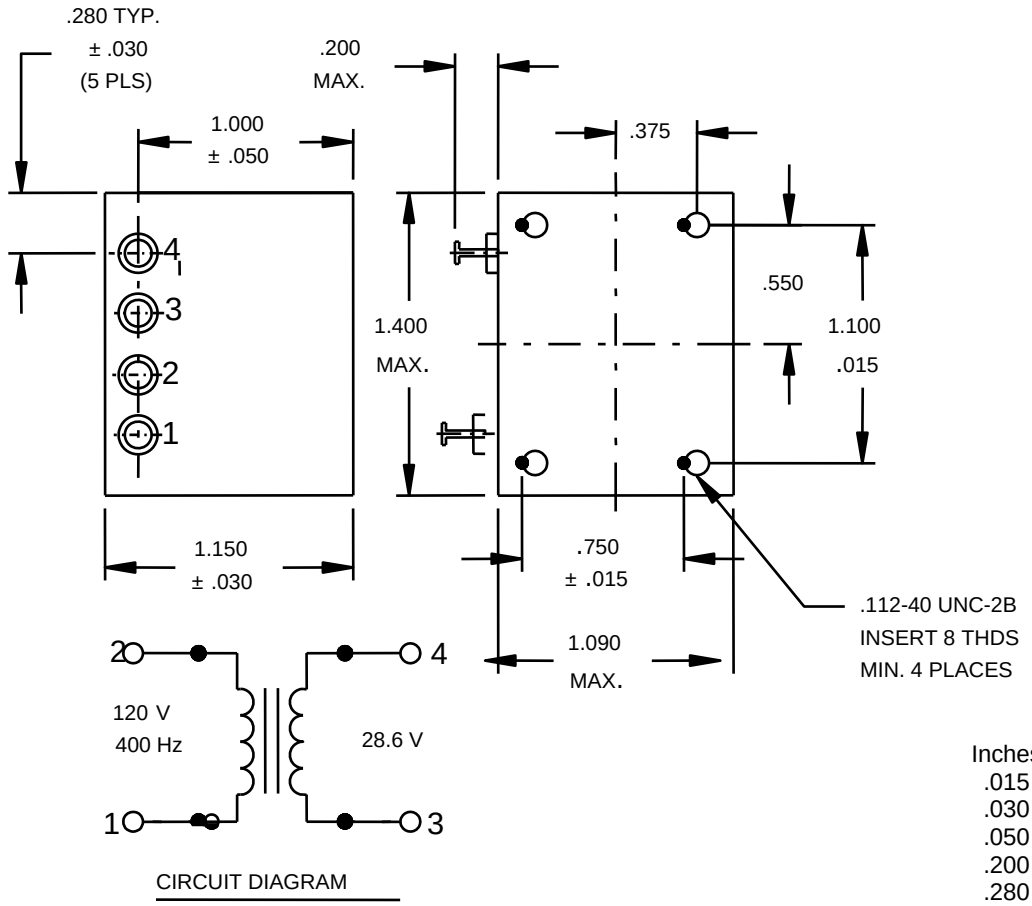

CIRCUIT DIAGRAM

Inches	mm
.015	0.38
.030	0.76
.050	1.27
.200	5.08
.280	7.11
.375	9.53
.550	13.97
.750	19.05
1.000	25.40
1.090	27.69
1.100	27.94
1.150	29.21
1.400	35.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be sides of the case.

FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, such as (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Primary voltage:

(1-2): 120 volts, 400 Hz, 12 VA.

Secondary voltage:

Working voltage: 250 volts.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Epoxy, glass in accordance with MIL-DTL-25421, type 1, class 2.

Terminals: Solder, turret type

Material: Brass, silver-plated.

Height: .200 inches, maximum.

Weight: 100 grams.

Altitude: 50,000 feet.

Operating temperature range: -65°C to +155°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5.0 pounds.

Dielectric withstanding voltage

At sea level: 700 volts rms.

At reduced barometric pressure: 312 volts rms.

Electrical characteristics:

No load: With 120 volts and 400 Hz in (1-2):

Current in (1-2): 20 mA maximum.

Power in (1-2): 2.40 watts maximum.

Voltage across (3-4): 31.5 V rms ±2 percent.

Rated load: With 120 volts and 400 Hz in (1-2):

Voltage across (3-4): 28.6 V rms ±5 percent.

Current in (3-4): 0.385 A rms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:35Z
Check the source to verify that this is the current version before use.

DC resistance: (1-2) – 49.5 ohms.
(3-4) – 3.1 ohms.

Polarity: Additive, with terminals 2 and 3 connected.

Temperature rise: 55°C with 120 volts, 400 Hz across (1-2) at an ambient temperature of 100°C.

Vibration: MIL-STD-202, method 204, test condition D.

Marking location: See figure 1.

Part or Identification Number (PIN): M27/134-1.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-PRF-27, this document references the following:

MIL-DTL-25421
MIL-STD-202

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5950-2009-005)

Review activities:
Army - AR, CR4
Navy - AS, MC, OS, SH
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:35Z
Check the source to verify that this is the current version before use.