INCH-POUND

MIL-PRF-27/155C
W/AMENDMENT 1
1 June 2023
SUPERSEDING
MIL-PRF-27/155C
22 April 2011

PERFORMANCE SPECIFICATION SHEET

TRANSFORMERS, POWER, STEPDOWN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for procuring the transformer described herein shall consist of this document and the latest issue of specification MIL-PRF-27.

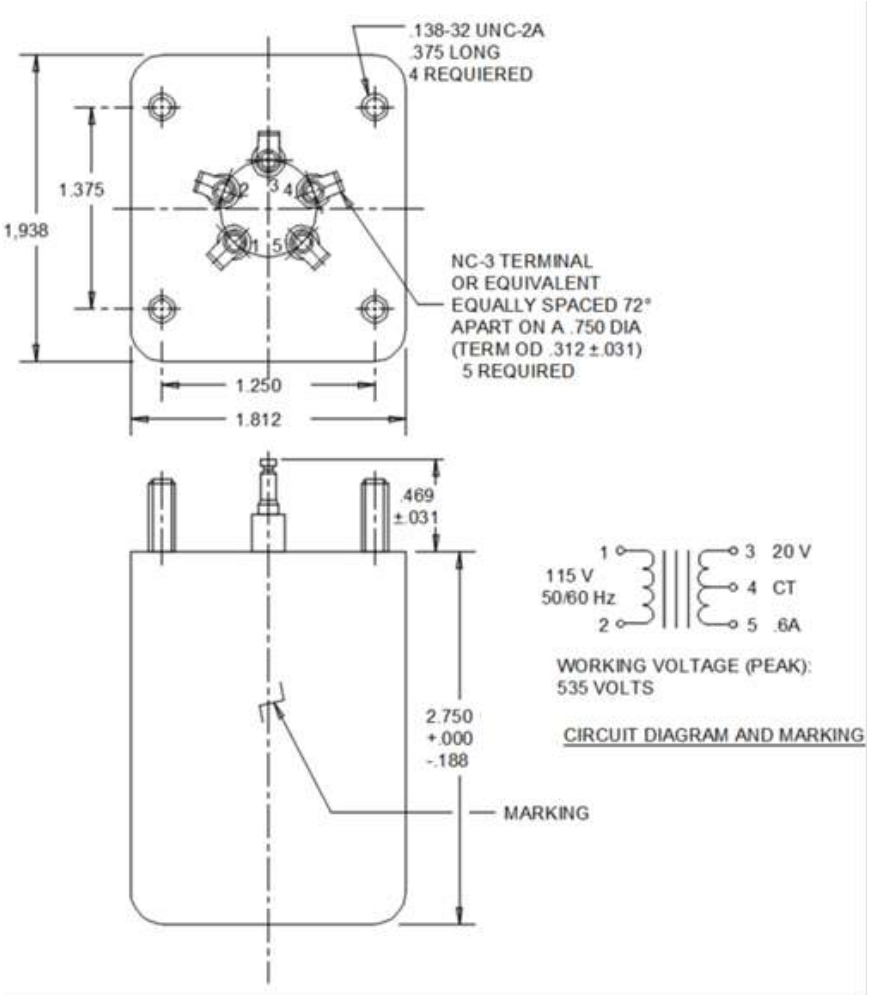


FIGURE 1. Dimensions and configurations.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:40Z
Check the source to verify that this is the current version before use.

INCHES	MM
.016	0.41
.031	0.79
.094	2.39
.125	3.18
.138	3.51
.188	4.78
.312	7.92
.375	9.53
.469	11.91
.750	19.05
1.250	31.75
1.375	34.93
1.812	46.03
1.938	49.23
2.750	69.85

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on terminal position dimensions is ±.016 inch.
4. Unless otherwise specified, tolerance on overall case dimensions shall be +.000, -.125 inch.
5. Marking shall be on the side of the case.

FIGURE 1. Dimensions and configurations – continued.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings: See table I.

Primary voltage (1-2): 115 volts rms, 50/60 Hz.

Voltamperes: 12.

Secondary voltage (3-5): 20 volts rms, center-tap.

Secondary current (3-5): 0.6 amperes.

Working voltage (peak): 535 volts.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Metal encased.

Terminals: Solder terminal, Lundey #399E or equivalent.

Terminal height: .469 inch ±.030 inch (11.91 ±0.76 mm).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:40Z
Check the source to verify that this is the current version before use.

Weight: 20.9880 ounce, maximum.

Operating temperature range: -55˚C to +130˚C.

Terminal strength: MIL-STD-202-211, test condition A, 5 pounds and test condition E, 8.0 ounce-inch.

Shock (specified pulse): MIL-STD-202-213, test condition H.

Dielectric withstanding voltage (at sea level): 1,500 volts rms.

Electrical characteristics:

No Load: With 115 volts, 60 Hz across (1-2), current in (1-2) shall not exceed 35 mA and the power in (1-2) shall not exceed 0.8 watts.

Rated load: With 115 volts, 60 Hz across (1-2), the voltage across (3-5) shall be 20 volts ±5 percent.

DC resistance:

(1-2): 82 ohms, maximum.
(3-5): 3.44 ohms, maximum.

Polarity: Additive, with terminals 2 and 3 connected.

Temperature rise: 40˚C with 115 volts rms, 60 Hz across (1-2) at an ambient temperature of 90˚C.

Marking location: See figure 1.

Part or Identification Number (PIN): M27/155-01.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-27, this document references the following:

MIL-STD-202-211
MIL-STD-202-213

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA – CC

Preparing activity:
DLA - CC

(Project 5950-2023-002)

Review Activities:
Army – AR, CR4, MI
Navy – AS, MC, OS, SH
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:40Z
Check the source to verify that this is the current version before use.