| INCH-POUND |

MIL-T-27/136A
13 March 1991
SUPERSEDING
MIL-T-27/136
15 OCTOBER 1976


MILITARY SPECIFICATION SHEET


TRANSFORMER, POWER, STEPDOWN AND STEP-UP, TYPE TF5T03ZZ955

Ⓐ | Inactive for new design after the date of this specification. |

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-27.

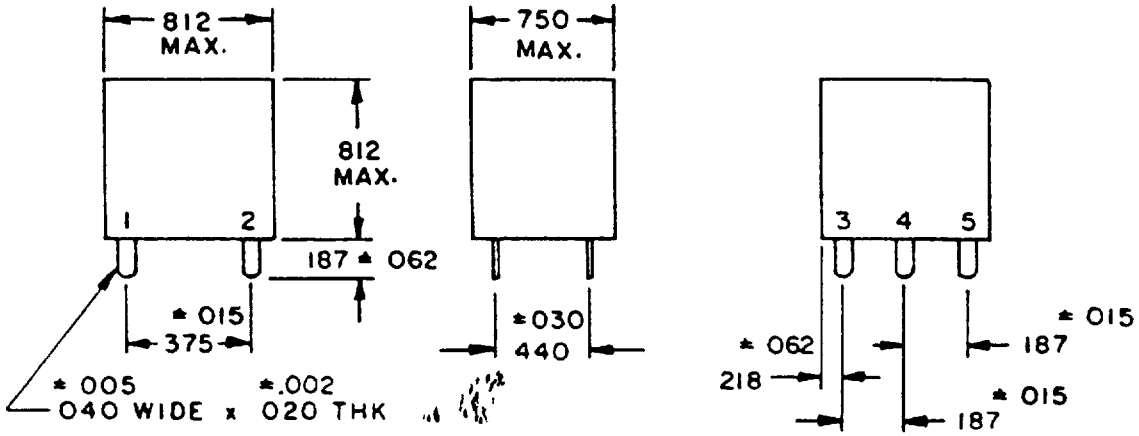

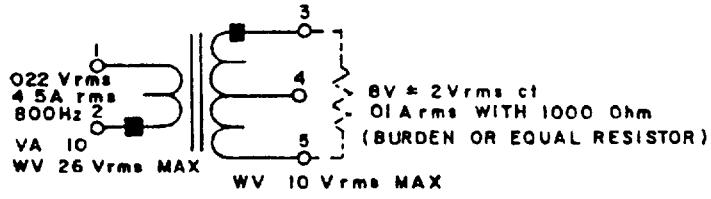

Inches	mm	Inches	mm
.002	0.05	.062	1.57
.005	0.13	.187	4.75
.015	0.38	.218	5.54
.020	0.51	.375	9.52
030	0.76	.750	19.05
.040	1.02	.812	20.62

CIRCUIT DIAGRAM AND MARKING

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the top and side of the case.

FIGURE 1. Dimensions and configurations.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the windings.)

Electrical ratings

Primary voltage (1-2) 0 022 volt rms, 800 Hz

Primary current 4.5 amperes rms

Volt-ampere· 0 10 VA.

Secondary voltage. (3-5): 8 volts ±2 volts rms ct, 0.01 ampere rms, with a 1,000 ohm Burden or equal resistor.

Working voltage:

(1-2): 26 volts rms maximum.
(3-5): 10 volts rms maximum.

DC resistance:

(1-2): 0.015 ohm maximum.
(3-5): 16 ohms maximum

Design and construction:

Dimensions and configuration· See figure 1.

Case. Encapsulated.

Material· Epoxy.

Terminals: Lug type, for printed circuit mount.

Terminal height: 0.187 inch ±0.062.

Weight: 1 ounce.

Operating temperature range· -55°C to +170°C.

Terminal strength. MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage

At sea level. 1,000 volts rms.

At barometric pressure· 300 volts rms

Electrical characteristics:

No load· With 0.022 volt, 800 Hz across (1-2), current in (1-2), shall not exceed 4.5A and the power in (1-2) shall not exceed .040 watt.)· 2.6 watts maximum.

Voltage across (3-5): 10.0 volts ±20 percent, with a 1,000 ohm Burden or equivalent resistor.

Rated load· With 0.022 volt rms, 800 Hz across (1-2), the voltage across (3-5) shall be 8 volts ±2 volts rms ct, with 1,000 ohm ±1 percent Burden or equivalent resistor.

Polarity Additive, with terminals 1 and 3 connected.

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:36Z
Check the source to verify that this is the current version before use.

(A) Quality assurance provisions.

Qualification inspection. Not applicable

Quality conformance inspection. Groups A and B tests of MIL-T-27 shall be applicable.

Marking location. See figure 1.

Part number. M27/136-01.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities:
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity.
Army - ER

Agent:
DLA - ES

(Project 5950-0753-34)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:36Z
Check the source to verify that this is the current version before use.