
INCH-POUND
MIL-T-27/149C
16 August 1993
SUPERSEDING
MIL-T-27/149B
21 May 1987

MILITARY SPECIFICATION SHEET


TRANSFORMERS AND INDUCTORS (AUDIO, POWER, AND HIGH-POWER PULSE), INDUCTORS, POWER, TF5S04ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27.

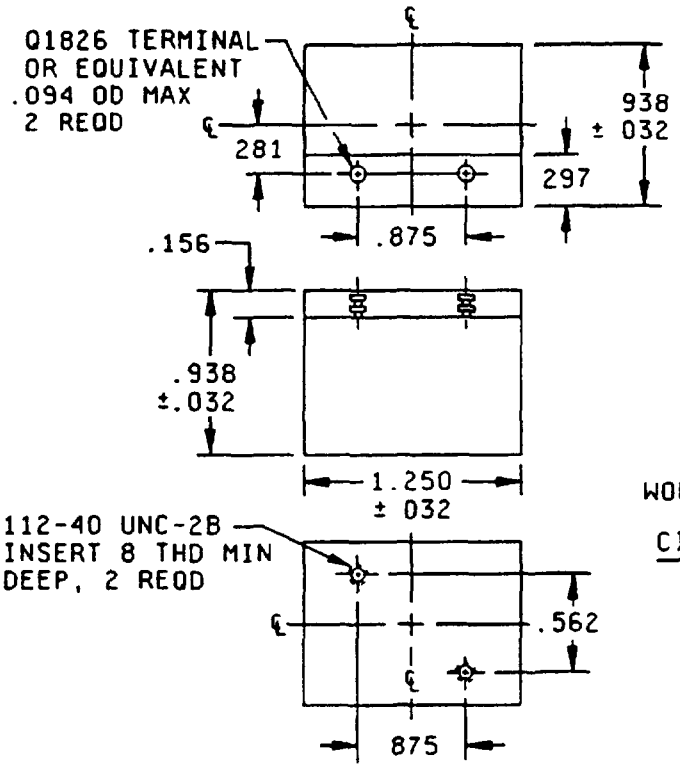

Inches	mm
.032	0.81
.094	2.39
112	2.84
156	3.96
281	7.14
.297	7.54
.562	14.27
875	22.22
938	23 83
1.250	31 75



WORKING VOLTAGE (PEAK). 357 V

CIRCUIT DIAGRAM AND MARKING

NOTES:
1. Dimensions are in inches
2. Metric equivalents are given for information only
3. Marking shall be on the side of the case.
4. Tolerances on all dimensions shall be ±.016 inch (0 41 mm), unless otherwise specified

FIGURE 1. Dimensions and configuration.

© denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings

Inductance (1-2) 1 5 H minimum

Voltage (1-2) 10 volts, 60 Hz

Current (1-2) 45 mA dc

DC resistance (1-2). 225 ohms ±25 percent.

Working voltage (peak). 357 volts

Power: 456 mW, maximum

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case: Encapsulated

Material: Epoxy

Terminals Solder terminal

Height: 156 inch, maximum

Diameter .094 inch ±0 016

Weight 0.12 pound, maximum.

Operating temperature range -55°C to +130°C

Shock (high impact). MIL-STD-202, method 207

Terminal strength: MIL-STD-202, method 211, test condition A, 2.0 pounds and test condition D, 8 ounce-inches.

Vibration (high frequency) MIL-STD-202, method 204.

Dielectric withstanding voltage (at sea level) 1,000 volts rms.

Electrical characteristics

Inductance With 10 volts, 60 Hz across (1-2), and 45 mA dc applied to (1-2) the inductance shall be 1 5 H minimum

Temperature rise 45°C, with 10 volts rms, 60 Hz, 45 mA dc applied to (1-2) at an ambient temperature of +85°C

Marking location See figure 1

(C) Part or Identifying Number (PIN) M27/149-01

(C) Qualification inspection Not applicable for this specification sheet.

Source: https://assist.dla.mil -- Downloaded: 202640-16T03:39Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy - OS, SH
Air Force - 17, 99

User activities.
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0824)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:39Z
Check the source to verify that this is the current version before use.