

MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEP-DOWN, TF4S03FB

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27

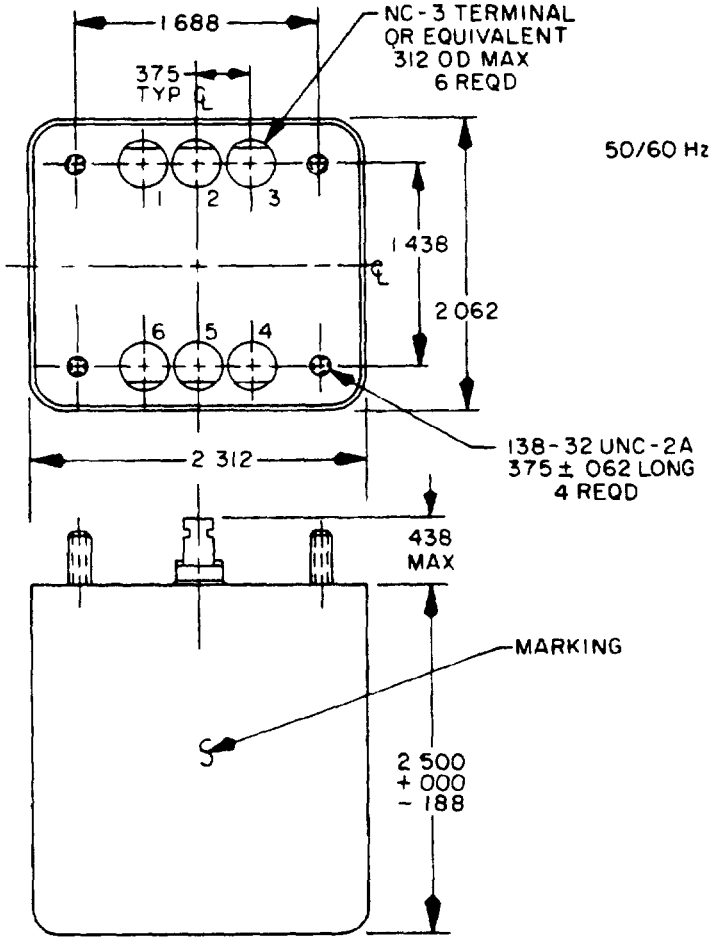

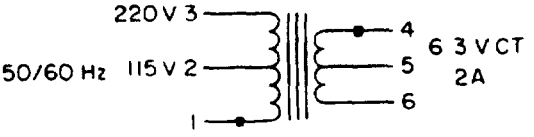

WORKING VOLTAGE (PEAK):
(1-3). 535 VOLTS
(4-6)· 1070 VOLTS

CIRCUIT DIAGRAM AND MARKING

INCHES	MM
.032	81
062	1.57
125	3 18
138	3 51
188	4 78
312	7.92
375	9 52
438	11 13
1 438	36.53
1 688	42 88
2 062	52 37
2 312	58 72
2 500	63 50

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
3. Unless otherwise specified, tolerance on overall dimensions is + 000, - 125 inch
4. Tolerance on terminal position dimensions is ± 032 inch
5. Marking shall be on the side of the case

FIGURE 1 Dimensions and configuration

(A) denotes change

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e , (1-2) are used, they indicate the winding and the extreme terminals of the winding)

Electrical ratings
Primary voltage
(1-2): 115 volts rms, 50/60 hertz
(1-3) 220 volts rms, 50/60 hertz
VA 12.6
Secondary voltage (4-6) 6 3 volts rms ct
Secondary current (4-6): 2.0 amperes rms.
Working voltage (peak)
(1-3) 535 volts.
(4-6) 1070 volts.

Design and construction
Dimensions and configuration See figure 1
Duty cycle Continuous.
Case Metal.
Terminals Solder terminal, NC-3 or equivalent.
Terminal height 0 438 inch, maximum
Weight: 816 grams, maximum
Operating temperature range -55° to +130°C

Terminal strength MIL-STD-202, method 211, test condition A, 5.0 pounds

Dielectric withstanding voltage (at sea level)
(1-3) 1500 volts rms.
(4-6) 2500 volts rms.

Electrical charateristics
No load With 115 volts, 60 hertz across (1-2), current in (1-2) shall not exceed 100 milliamperes and the power in (1-2) shall not exceed 2 watts
Voltage across (4-6) 7 05 volts ±3 percent
(A) Rated load With 115 volts, 60 hertz across (1-2), the voltage across (4-6) shall be 6 3 volts ±5 percent
DC resistance
(1-3) 200 ohms, maximum
(4-6) 0.15 ohm, maximum
Polarity Additive with 3 and 4 connected

Temperature rise 40°C with 115 volts rms, 60 hertz across (1-2) at an ambient temperature of 90°C

Marking location: See figure 1

Part number: M27/153-01.

Custodians
Army - EL
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities
Army - AR, WC, ME
Navy - MC, AS
Air Force - 19

Preparing activity
Army - EL

Agent
DLA - ES

(Project 5950-0556-2)

Source: https://assist.dla.mil -- Downloaded: 20260-16T03:39Z
Check the source to verify that this is the current version before use.

NDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-T-27/153A TRANSFORMER, POWER, STEP-DOWN, TF4S03FB

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:39Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Cdr, ERADCOM
ATTN: DELSD-D-TS-S
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:39Z
Check the source to verify that this is the current version before use.