
MILITARY SPECIFICATION SHEET


TRANSFORMER, POWER, STEP-DOWN, TF4S03EB

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

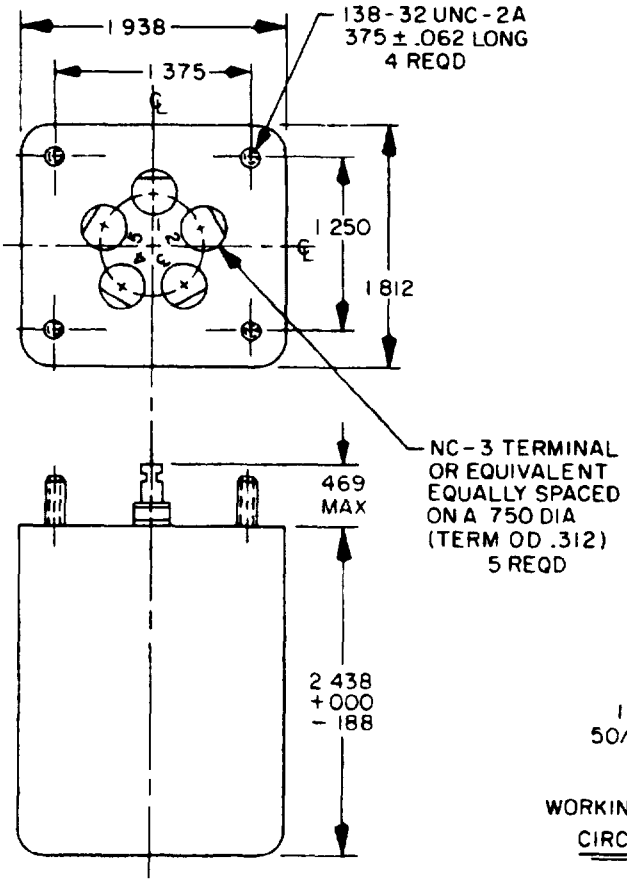

INCHES	MM
016	41
062	1 57
125	3 18
.138	3.51
.188	4 78
312	7 92
.375	9.52
469	11 91
.750	19 05
1.250	31 75
1 375	34 92
1 812	46 02
1 938	49 23
2 438	61 93



WORKING VOLTAGE (PEAK) 535 VOLTS

CIRCUIT DIAGRAM AND MARKING

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
3 Unless otherwise specified, tolerance on overall case dimensions is + 000, - 125 inch
4 Tolerance on mounting dimensions is ± 016 inch
5 Marking shall be on the side of the case

FIGURE 1 Dimensions and configuration

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 202640-16T03:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the winding)

Electrical ratings
Primary voltage (1-2) 115 volts rms, 50/60 Hz
VA 6
Secondary voltage (3-5) 20 volts rms ct
Secondary current (3-5) 0.3 amperes rms
Working voltage (peak) 535 volts

Design and construction
Dimensions and configuration See figure 1
Duty cycle Continuous
Case Metal encased
Terminals Solder terminal, NC-3 or equivalent.
Terminal height 0.469 inch, maximum
Weight 476 grams, maximum
Operating temperature range -55°C to +130°C.

Terminal strength MIL-STD-202, method 211, test condition A, 5 0 pounds and test condition E, 8.0 ounce-inches.

Dielectric withstanding voltage (at sea level) 1500 volts rms

Electrical characteristics
No load With 115 volts, 60 Hz across (1-2), current in (1-2) shall not exceed 75 mA and the power in (1-2) shall not exceed 1 0 watt.
Voltage across (3-5) 23.5 volts ±3 percent
Rated load With 115 volts, 60 Hz across (1-2), the voltage across (3-5) shall be 20 volts ct ±3 percent
DC resistance
(1-2) 150 ohms, maximum
(3-5) 7 5 ohms, maximum
Polarity Additive, with 2 and 3 connected

Temperature rise 40°C with 115 volts rms, 60 Hz across (1-2) at an ambient temperature of 90°C

Marking location See figure 1

Part number M27/154-01

Custodians
Army - EL
Navy - EC
Air Force - 85

Review activities
Army - MI, SE
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities
Army - MU, WC, ME
Navy - MC, AS
Air Force - 19

Preparing activity
Army - EL

Agent
DLA - ES

(Project 5950-0538-13)

*

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:39Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel either Government or contractor involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION MIL-T-27/154 TRANSFORMER, POWER, STEP-DOWN, TF4S03EB

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity Optional)*

DATE

DD FORM 1 JAN 68 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-PM 1068-68

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 202640-16T03:39Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN. ~~AMSEL-RD-~~ DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:39Z
Check the source to verify that this is the current version before use.