
MILITARY SPECIFICATION SHEET

VALVE, SELECTOR, SOLENOID OPERATED


This specification is approved for use within the Army Missile Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the valve described herein shall consist of this specification and the latest issue of MIL-V-47322(MI).

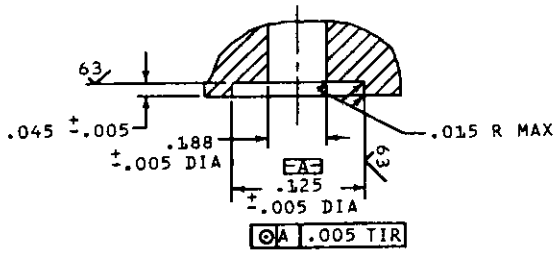


SECTION A-A

TYP ALL PORTS



VALVE SCHEMATIC

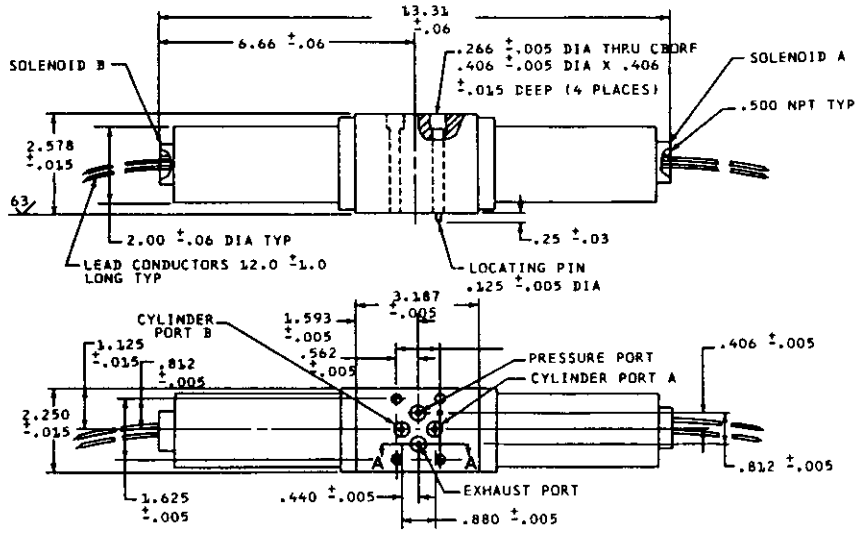

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are acceptable.
3. Dimensions are after plating unless otherwise specified.

FIGURE 1. Valve, selector, solenoid.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material:

Housing: Steel, commercial.

Internal surfaces: Corrosion resistant steel, commercial.

Lead conductors: 18 AWG wire, 16 strand, 0.010 tinned copper, with 0.046 thick polyvinyl chloride insulation.

Surface roughness: In accordance with ANSI B46.1.

Finish: Enamel, commercial, except ports.

Design and construction: The valve shall have detents to retain the valve in the last energized position with no electrical power applied. When the opposite coil is energized the valve will change position. Valve shall withstand electrical power applied continuously and shall operate in any attitude.

Mechanical requirements:

Flow rating: 0.28 gallons per minute.

Pressure drop: 1.0 pounds per square inch (psi) maximum at rated flow.

Actuation time: 0.25 seconds maximum.

Operating life: 50,000 cycles. One cycle is defined as port A to port B to port A.

Internal leakage: One drop per minute maximum, each port.

Electrical requirements:

Duty cycle: Continuous.

Actuation voltage: 21 to 28 volts dc (Vdc).

Coil current:

In rush: 24 amperes (A) maximum.

Holding: 0.603 A maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

Coil resistance:

In rush: 1.04 ohm ± 10 percent at 70°F.

Holding: 39.8 ohm ± 10 percent at 70°F.

Dielectric strength: 500 volts root mean square (Vrms) at 60 hertz (Hz) for 60 seconds, current leakage 10 milliamperes (mA) maximum.

Insulation resistance: 50 megohm minimum at 500 Vdc.

Part number: M47322/5

Custodian:
Army - MI

Preparing activity:
Army - MI

(Project No. 4810-A073)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.