
This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-S-13625(AT)

Form Approved
OMB No. 0704-0188

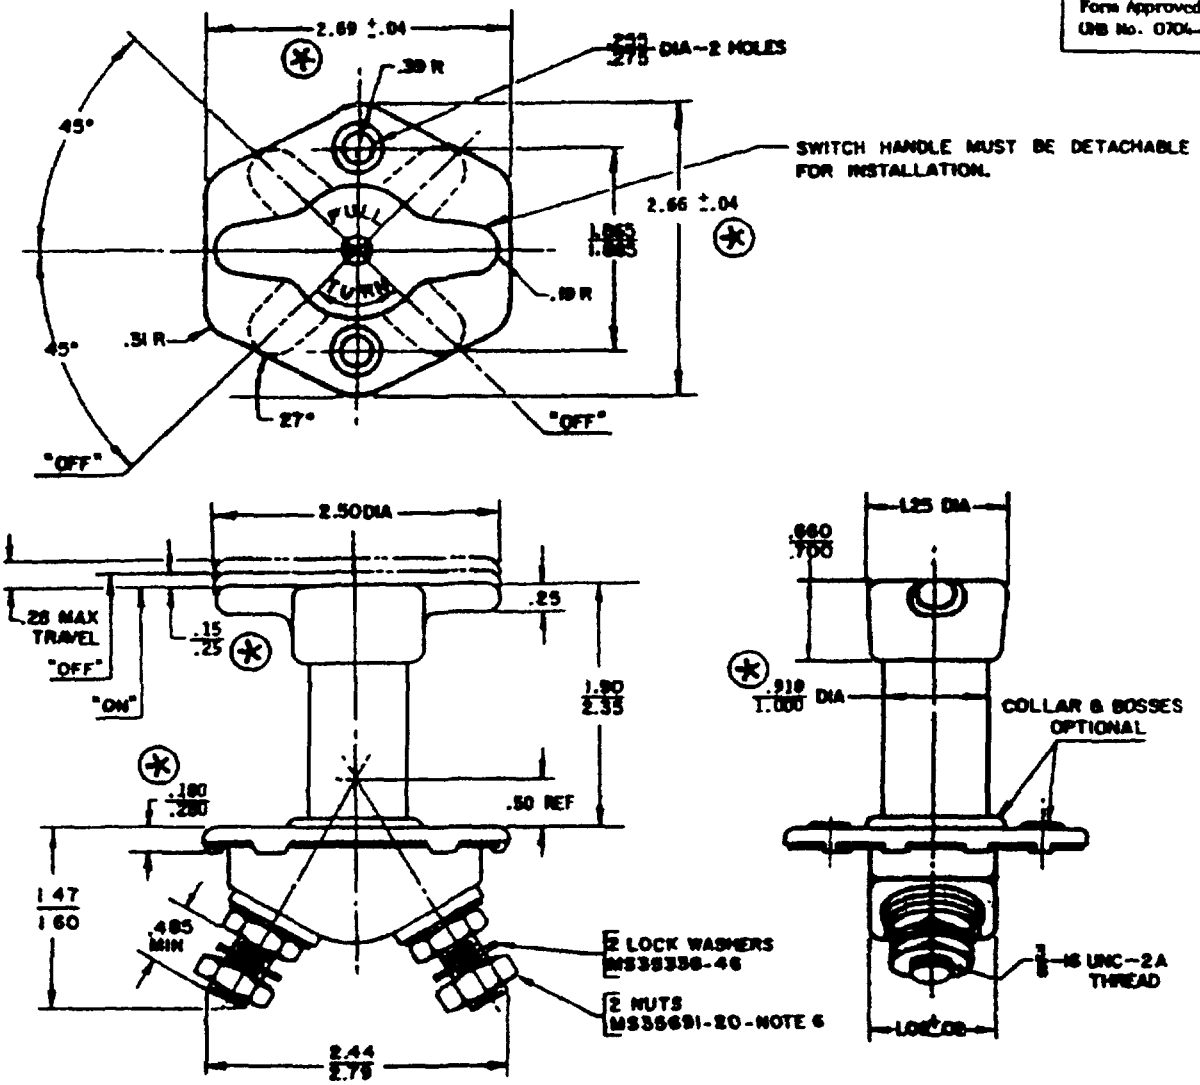

NOTES:
1. TYPE V (SINGLE POLE, SINGLE THROW, PULL-LATCH DISCONNECT, NORMALLY CLOSED); CLASS A (SLOW MAKE AND BREAK); GRADE 2 (OPEN) OF PROCUREMENT SPECIFICATION.
2. 300 AMP RESISTIVE LOAD, 190 AMP INDUCTIVE LOAD.
3. FORCE REQUIRED TO OPERATE THE SWITCH SHALL BE 13 ±2 POUNDS.
4. SHALL WITHSTAND A MINIMUM OVERLOAD FORCE OF 150 POUNDS WITHOUT DAMAGE.
5. SHALL NOT EXCEED A MAXIMUM WEIGHT OF 17 OUNCES.
6. NUT SHALL NOT BE COATED WITH BLACK OXIDE.
7. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARD FOR FEDERAL SERVICES HANDBOOK H 28
8. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±.01 ON DECIMALS, ±0° 30' ON ANGLES.
9. FOR DESIGN FEATURE PURPOSES, THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
10. THIS SPECIFICATION SHEET IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
11. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
12. MARKING SHALL CONSIST OF THE PART OR IDENTIFYING NUMBER (PIN) AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

(*) DENOTES CHANGES MADE IN CONJUNCTION WITH CONVERSION FROM MILITARY STANDARD TO SPECIFICATION SHEET FORMAT.

PART OR IDENTIFYING NUMBER (PIN)	SUPERSEDES	
	MS PART NO.	FORMER PART NO
MIL-S-13625/2-1	MS27200-1	8339369

PREPARING ACTIVITY: ARMY-AT

CUSTODIANS: ARMY-AT NAVY- AIR FORCE-

REVIEW: ARMY-MI; DLA-ES

USER: ARMY-ME

PROJECT NUMBER 5930-A665-02

MILITARY SPECIFICATION SHEET

TITLE:
SWITCHES, PULL; SWITCHES, PUSH; SWITCHES, BEAM SELECTING, HEADLIGHT: ELECTRICAL (28 VOLTS DC MAXIMUM, FOR MILITARY VEHICLES)

SPECIFICATION SHEET NUMBER:
MIL-S-13625/2(AT)
5 NOVEMBER 1990

SUPERSEDING:
MS27200B, 7 NOVEMBER 1969

AMSC-N/A FSC-5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.