MIL-P-13637(Ord)
14 September 1954
SUPERSEDING
FCP 1652
23 March 1953

MILITARY SPECIFICATION
PACKAGING OF MOUNT, TELESCOPE, M76

1. SCOPE

1.1 This specification covers preservation, packaging, packing and marking of Telescope Mount M76, with or without an instrument light, for overseas shipment or domestic shipment involving extended storage, domestic shipment for limited storage, and domestic shipment for immediate use.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standard of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

NN-B-621	- Boxes; Wood, Nailed and Lock Corner.
PPP-B-601	- Boxes, Wood, Cleated-Plywood,

Military

JAN-P-100	- Packaging and Packing for Overseas Shipment - General Specification.
JAN-P-106	- Boxes; Wood, Nailed (Overseas Type).
MIL-P-116	- Preservation, Methods of.
JAN-P-117	- Packaging and Packing for Overseas Shipment-Bags, Interior Packaging.
JAN-B-121	- Barrier Materials, Greaseproof
JAN-P-127	- Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure-Sensitive, Water-Resistant.
MIL-B-131	- Barrier Material; Water-Vaporproof, Flexible.
MIL-A-140	- Adhesive, Water-Resistant, Waterproof Barrier - Material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

MIL-L-3150 - Lubricating Oil, Preservative Medium.
MIL-C-5092 - Cement Rubber (Synthetic and Reclaimed Rubber Base.)
MIL-R-6855 - Rubber; Synthetic, Sheet, Molded and Extruded, for Aircraft Applications.
MIL-C-11796 - Compound, Corrosion Preventive, Petrolatum Type, Hot Application.
MIL-P-11445 - Packaging of Lights, Aiming Post and Lights, Instrument.

U. S. Army
3-182 - Compound, Insulation, Ignition

STANDARDS

Military

MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials - The following shall apply wherever packaging materials are referred to in this specification by name only:

REFERENCE	FULL IDENTIFICATION
Greaseproof barrier material	Type I or II, grade c, class 1 or 2 of Specification JAN-B-121.
Pressure sensitive tape	Any type and grade (at least 2 inches wide) of Specification JAN-P-127.
Preservative (compound)	Class 2 of Specification MIL-C-11796.
Preservative (Oil)	Specification MIL-L-3150.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

3.2 Overseas shipment or domestic shipment involving extended storage - Where the mounts are to be shipped overseas or for domestic shipment involving extended storage, the following disassembling, cleaning, preserving, packaging, packing and marking requirements shall apply:

3.2.1 Disassembling and cleaning

3.2.1.1 Disassembling - The rod assembly shall be disassembled from the mount. The rod shall then be disassembled from the bracket assembly as shown in Figure 2.

3.2.1.2 Cleaning - Cleaning method C-4 of Specification MIL-P-116 shall be used to clean critical unprotected metal surfaces. Cleaning method C-1 of Specification MIL-P-116 shall be used to clean surfaces other than critical surfaces. The instrument light shall be cleaned in accordance with Specification MIL-P-11445.

3.2.2 Preserving - Preservative (compound) shall be applied on the threads, at both ends of the rod. The mounting hardware (screws, washers, nuts) and locating pins shall be coated with preservative (oil). Preservative (oil) shall be applied on the unpainted surfaces of the bracket assembly. Preservative (compound) shall be applied on the unpainted surfaces of the mount, except on the connector assembly. Preservative (oil) shall be applied on the unpainted surfaces of the connector assembly.

3.2.3 Packaging - Each mount shall be packaged Method IA as described herein and illustrated in Figures 2 to 5 inclusive. The instrument light shall be packaged Method III and secured to the mount inside the water-vaporproof floating bag.

3.2.3.1 Unit packaging the mount without an instrument light

3.2.3.1.1 The rod shall be wrapped with greaseproof barrier material. The wrap shall be secured with pressure sensitive tape.

3.2.3.1.2 The coated hardware and pins shall be wrapped with greaseproof barrier material; however, the pins shall not be placed with the screws, nuts and washers (see Figure 2). The wraps shall be secured with pressure sensitive tape. The wrapped mounting hardware and pins **then shall be placed in a greaseproof bag, conforming to type I or II, grade B, class a of Specification JAN-P-117.**

3.2.3.1.3 The bracket shall be wrapped with greaseproof barrier material, which shall be secured with pressure sensitive tape.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

3.2.3.1.4 All coated surfaces of the mount shall be covered or wrapped with greaseproof barrier material. The wraps shall be secured in place with pressure sensitive tape. The arm, containing the connector assembly, shall be immobilized by wrapping pressure sensitive tape around the connector and the portion of the mount where the elevation knob is located as shown in Figure 2.

3.2.3.1.5 The metal covers on the two level vial assemblies shall be positioned so that the faces of the level vials are covered. The metal covers shall be secured in place with pressure sensitive tape.

3.2.3.1.6 The packaged loose items, specified in 3.2.3.1.1, 3.2.3.1.2 and 3.2.3.1.3 shall be secured to the mount with pressure sensitive tape.

3.2.3.1.7 The mount **then shall be** secured to a wood base, which is shown in Figures 1 and 3, with step bolts. The mount shall be inside a floating bag fabricated from flexible water-vaporproof barrier material conforming to class 1 of Specification MIL-B-131. Gaskets shall be placed on each side of the barrier material where the step bolts pass through the barrier material. The gaskets shall be fabricated from material conforming to class II, grade 60 of Specification MIL-R-6855. The gaskets inside the bag shall be coated with cement, conforming to type 3 of Specification MIL-C-5092, on the side which contacts the barrier material. Cement shall be applied on both sides of the gaskets which are between the barrier material and the wood base. Flat steel washers and lock washers shall be added under the nuts. Unthinned paint shall be applied on the exposed threads above the nuts. Water-resistant adhesive, conforming to Specification MIL-A-140, shall be applied under the bolt heads prior to placing the bolts in position; also, around the bolt heads after the mount is secured. The opening of the floating bag shall be heat sealed, exhausting entrapped air prior to final closure.

3.2.3.2 Unit packaging the mount with an instrument light

3.2.3.2.1 The instrument light shall be packaged as specified in Specification MIL-P-11445, except that the bag and the box may be omitted.

3.2.3.2.2 The mount shall be packaged as specified in 3.2.3.1, except that the packaged instrument light shall be secured to the mount with pressure sensitive tape prior to placing the mount in the floating bag.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

3.2.4 Packing

3.2.4.1 Overseas shipment - The unit packaged mount shall be immobilized in a shipping container conforming to one of the following specifications:

PPP-B-601, Style A or B, type II or III, class 2
JAN-P-106, Style 2 or 4.

3.2.4.2 Domestic shipment involving extended storage.- The unit packaged mount shall be immobilized in a shipping container conforming to one of the following specifications:

NN-B-621 Style 2 or 4
PPP-B-601 Any Style, type II or III, class 1 or 2.

3.2.4.2.1 Nailed wood boxes shall be strapped with steel straps as specified in Specification NN-B-621. Plywood boxes shall be strapped as specified in Specification PPP-B-601. Straps shall not be stapled.

3.2.4.3 Dimensions, cubage and weight of shipping container.- The following inside dimensions, cubage and gross weight are approximate for a unit packaged mount packed in a nailed wood box:

Inside dimensions - 16-1/8 inches long by 14-1/8 inches wide by 14-1/2 inches deep
Cubage - 2.7 cubic feet
Gross weight - 95 pounds

3.2.4.4 The wood base shall fit snugly in the shipping container and shall be immobilized by nailing a hold down cleat in each corner of the container as shown in Figure 5.

3.2.5 Marking.

3.2.5.1 The information to be placed on each floating bag and shipping container shall be in accordance with Standard MIL-STD-129.

3.2.5.2 Protective coating on markings.- All exterior markings on the shipping container shall be coated with compound conforming to Specification 3-182.

3.3 Domestic shipment for limited storage.- Where the mount, with or without an instrument light is to be prepared for domestic shipment for limited storage, the following disassembling, cleaning, preserving, packaging, packing and marking requirements shall apply:

3.3.1 Disassembling and cleaning.- Disassembling and cleaning shall be as specified in 3.2.1.

3.3.2 Preserving.- Preservative compound shall be applied on the unpainted surfaces of the socket, which holds the telescope, and preservative oil shall be applied on other unprotected surfaces.

3.3.3 Packaging.- Packaging shall be as specified in 3.2.3.1 and 3.2.3.2 except that the floating bag, gaskets and application of adhesive under the bolt heads and around the bolt holes may be omitted. Greaseproof barrier material shall be placed between the mounting surfaces and the wood base. The instrument light shall be packaged as specified in Specification MIL-P-11445 for domestic shipment, except that the box may be omitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

3.3.4 Packing.- Packing shall be as specified in 3.2.4.2 and immobilized as specified in 3.2.4.4.

3.3.5 Marking.- Marking shall be as specified in 3.2.5, except that "PACKED FOR LIMITED STORAGE" shall be plainly stencilled on one end and one side panel of each shipping container.

3.4 Domestic shipment for immediate use.- Where mounts with or without instrument lights are to be shipped for immediate use the following disassembling, cleaning, preserving, packaging, packing and marking requirements shall apply:

3.4.1 Disassembling and cleaning.- Disassembling and cleaning shall be as specified in 3.2.1.

3.4.2 Preserving.- Preserving shall be as specified in 3.3.2, except that preservative oil shall be applied on the unpainted surfaces of the socket instead of preservative compound.

3.4.3 Packaging.- Packaging shall be as specified in 3.3.3.

3.4.4 Packing.- Packing shall be as specified in 3.3.4.

3.4.5 Marking.-Marking shall be as specified in 3.3.5, except as follows:

3.4.5.1 The serial number in the identification data may be omitted.

3.4.5.2 Each shipping container shall be marked "PACKED FOR IMMEDIATE USE" in lieu of "PACKED FOR LIMITED STORAGE".

3.5 Sample pack.- A preproduction pack shall be made in accordance with the applicable requirements of this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling.- The preproduction pack shall be inspected and approved by a government inspector prior to packaging and packing the items for shipment. Production packs shall be tested at random where the government inspector considers it necessary to conduct tests to assure conformance with the requirements of this specification.

4.2 Inspection.- All methods and materials shall be subject to inspection by a Government inspector.

4.3 Test procedures.- At the discretion of the Government inspector, the preproduction pack and any production packs selected for tests, shall be tested in accordance with Specification MIL-P-116 and Specification JAN-P-100.

5. PREPARATION FOR DELIVERY.- (Not applicable to this specification.)

6. NOTES

6.1 Ordering data.- Invitation for bids and contracts or orders should specify the title, number and date of this specification and the type of shipment involved.

6.2 The stock number for Telescope Mount M76 including mounting hardware (bolts, washers and pins) is F001-7597743. The stock number for Instrument Light M19 is F205-6543648. When the mount and instrument light are packaged together, both stock numbers should be added in the identification data.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


CUSTODIAN

Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

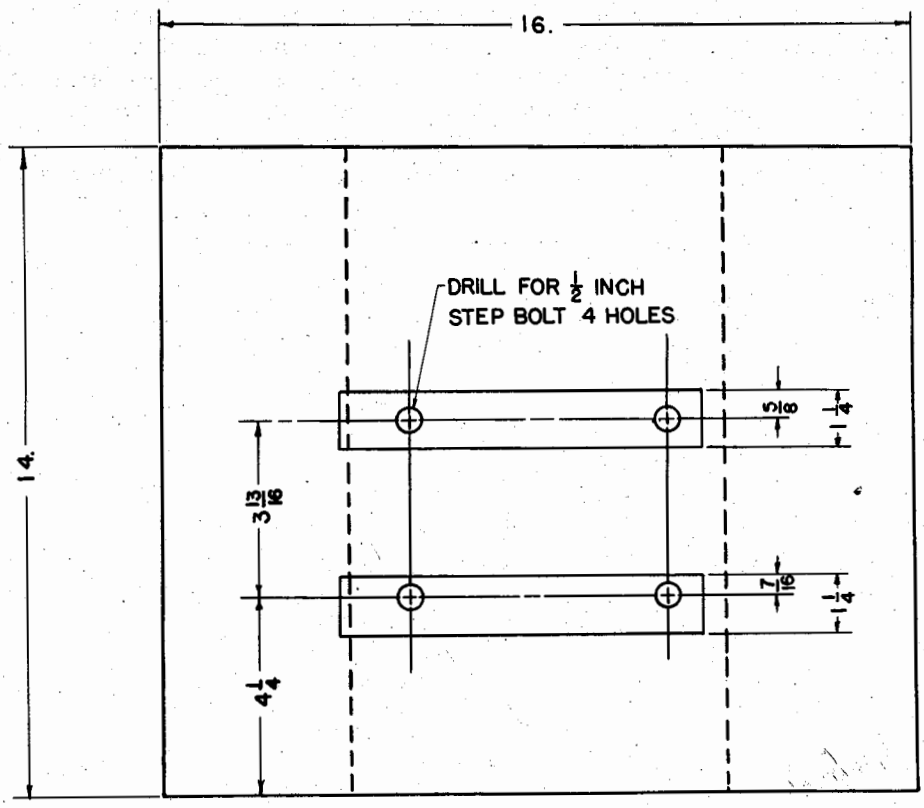


NOTE: USE GROUP I OR II LUMBER

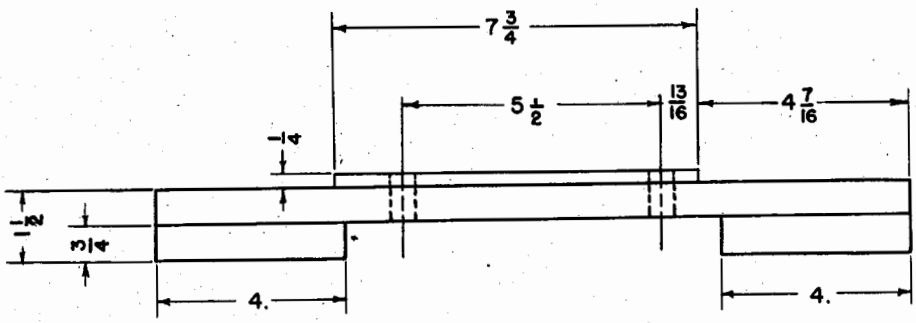

BASE FOR TELESCOPE MOUNT M76

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

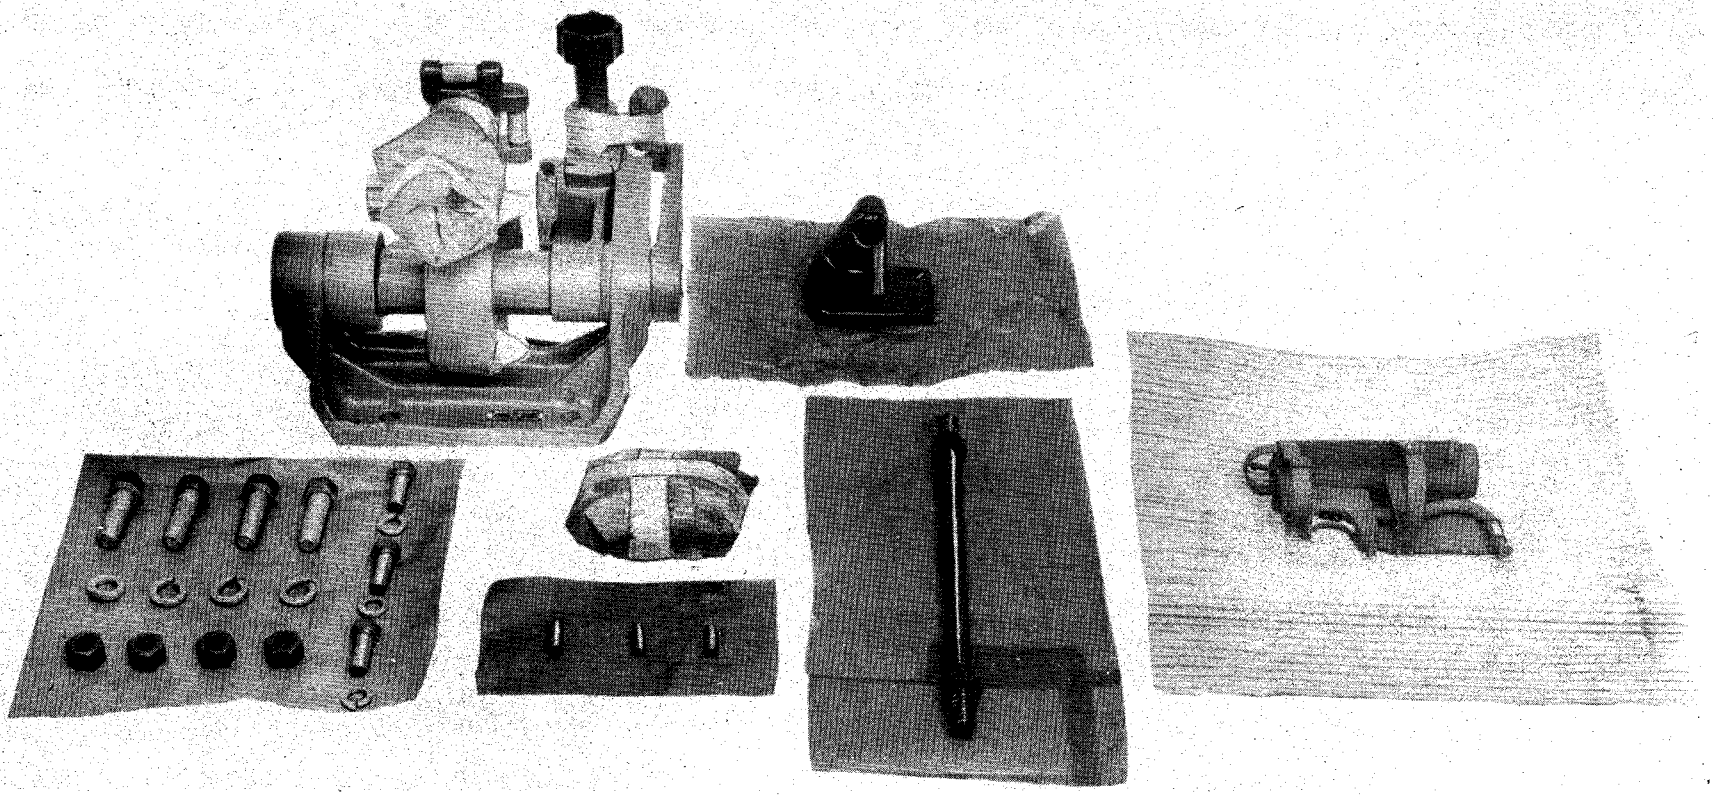

NEG. #23626-2 3-31-53 FRANKFORD ARSENAL ORD. CORPS

MOUNT, TELESCOPE, M76 - Prepared mount, mounting hardware, locating pins and instrument light package.
FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.


NEG. #23626-3 3-31-53 FRANKFORD ARSENAL ORD. CORPS

MOUNT, TELESCOPE, M76 - Prepared mount and packaged loose items prior to securing the packaged items to the mount and bolting the mount to the wood base.

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.



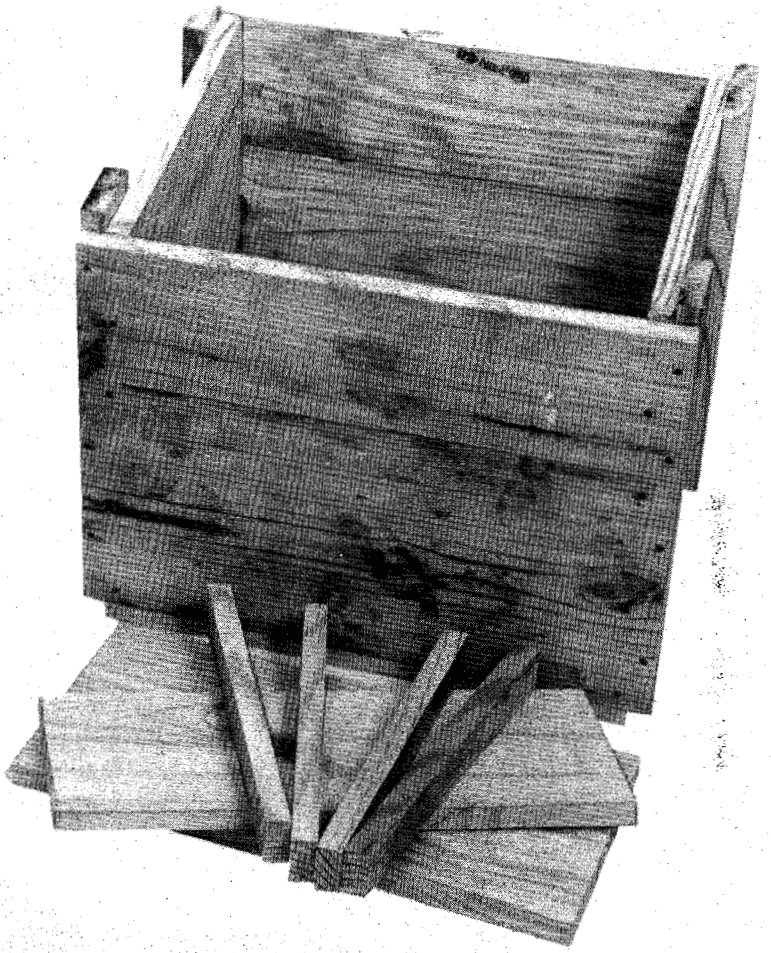


NEG. #23626-4 3-31-53 FRANKFORD ARSENAL ORD. CORPS

MOUNT, TELESCOPE, M76 - Mount (with packaged loose items secured in place) bolted to wood base prior to sealing the barrier material.

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

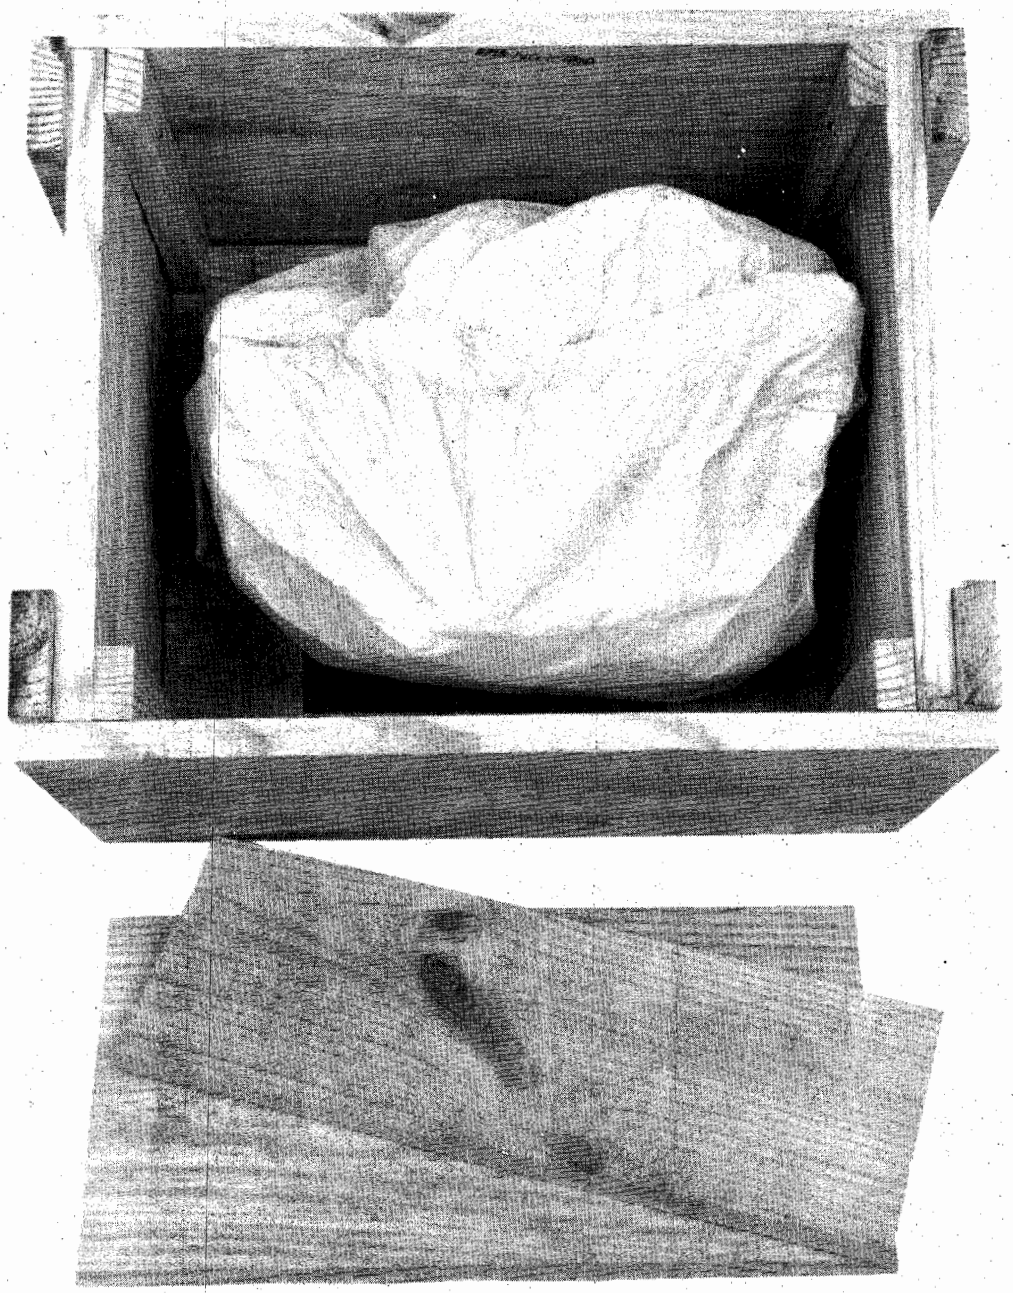

NEG. #23626-5 3-31-53 FRANKFORD ARSENAL ORD. CORPS

MOUNT, TELESCOPE, M76 - Wood base containing packaged items immobilized in shipping container with cleats in corners of the container.

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.